



RentalPro[®]

Spray Equipment for the Rental Industry



PROVEN QUALITY. LEADING TECHNOLOGY.

Our Story . . .

Graco® is a world leader in fluid handling solutions. Our products move, measure, control, dispense, and apply a wide range of materials. Designed with innovation and leading technology, Graco spray equipment makes painting and applying texture fast and easy while delivering a professional finish.

The company's success is built on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service.

For more than 85 years, Graco has provided customers with proven quality and leading technology. Founded in 1926, Graco is the world leader in fluid handling systems and components. Since developing its first portable airless sprayer in 1958, Graco is recognized worldwide as the professional contractor's number one choice for spray equipment.

The Brand Preferred by Pros™




Why Rent Graco Equipment?

Competitive Advantage

- Graco paint sprayers are in the top 5 requested rental items—**Pro's Prefer Graco!**
- All Graco equipment is backed by our commitment to quality—giving you confidence to rent and maximize your uptime
- Made in the U.S.A.
- 100% factory-tested to assure quality and performance
- Graco equipment is easy to use, clean, maintain and service

Maximum ROI

- We design equipment with features to:
 - > Maximize your rental days
 - > Shorten your tool turn-around time
 - > Reduce your maintenance cost
- Allowing you to achieve a full ROI within 20 days or less
- Graco holds its retail value longer, giving you a better ROI when you sell it

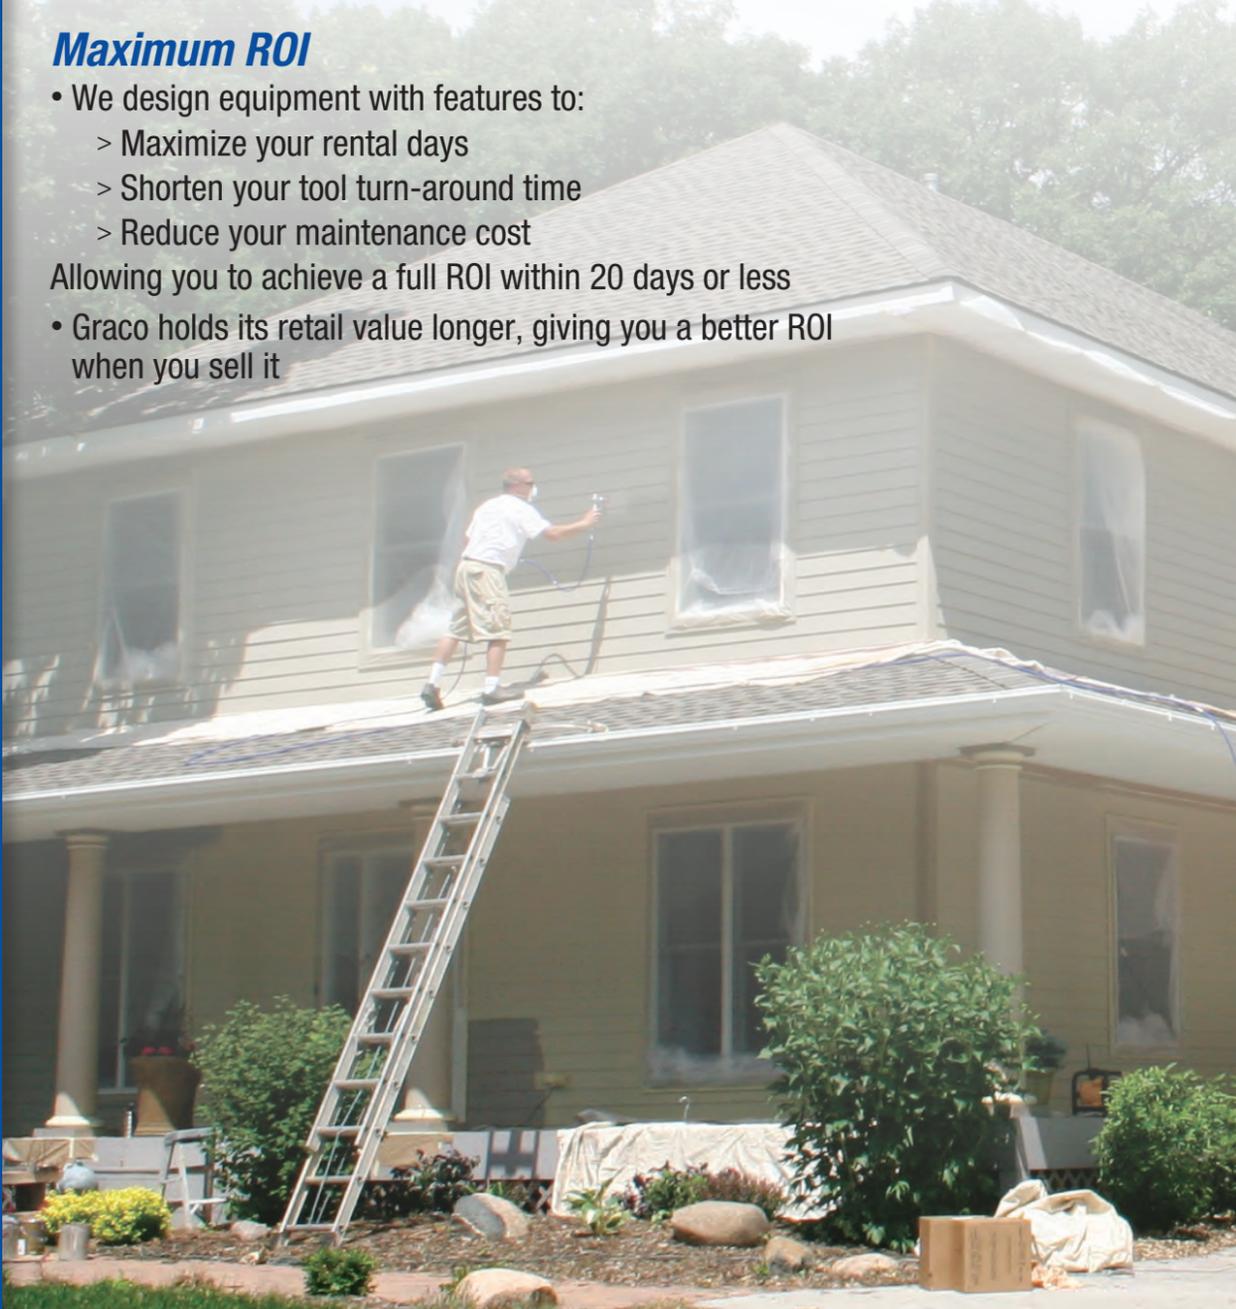

Graco has the Right Solutions for All Your Rental Needs

With the Graco RentalPro® line, you can offer your customers a solution for all of their painting, texturing and paint preparation needs. Graco is the preferred brand of contractors and offers the highest quality, longest lasting products—allowing you to maximize your profits!



GRACO SPRAYER SELECTION GUIDE

	PAINT SPRAYERS		GAS SPRAYER	TEXTURE SPRAYERS	
	RentalPro 210 PC	RentalPro 230 PC	GMAX 3900 II	RentalPro RTX 2000P1	RentalPro RTX 5000P1
EQUIPMENT CONFIGURATION					
Lo-Boy	X		X		
Hi-Boy		X	X	X	X
MATERIAL APPLICATIONS					
Lacquer	X	X			
Sealer	X	X			
Varnish	X	X			
Primers	X	X	X		
Acrylics	X	X	X	X	X
Enamels	X	X	X		
Latex	X	X	X		
Oil-Based Paints	X	X	X		
Exterior Stain	X	X			
Block Filler			X		
Elastomerics			X		X
Synthetic Stucco					X
Deck Coatings					X
Dry Wall Mud				X	X
Fillers				X	X
TYPICAL CUSTOMER USAGE					
Residential	X	X	X	X	X
Light Commercial	X	X	X	X	X
Medium Commercial			X		X
Heavy Commercial					X
Industrial					X

Maximize Rental Revenue—Rent, Turn, Repeat... with Graco's ProConnect™ Do-It-Yourself Pump Replacement System



- ▶ Quickly swap the pump for a spare in a matter of minutes
- ▶ No more lost rental revenue due to pump failure
- ▶ Reduces the cost of ownership and increases ROI—more rental days and less downtime

Graco Makes Tool Turns Fast & Easy!

In **3 Easy Steps** your sprayer is back working for you instead of you working on your sprayer.



Loosen the clamping nut



Open door and remove pump



Remove hose and suction tube

Fast Pump Removal

- 1-minute replacement
- Rent instead of waiting for service
- No training necessary



Protective Lo-Boy Frame

- Retractable trombone-style handle allows unit to easily fit in car trunk
- Carries paint container as it rolls
- Easily movable around a jobsite

Features Found Only on a Graco RentalPro Electric Sprayer:

NEW ProConnect™ Do-It-Yourself Easy Pump Replacement System

- ▶ No more lost rental due to pump failure
- ▶ Quickly swap the pump for a spare in a matter of minutes
- ▶ Reduces cost of ownership and increases ROI

Proven Endurance™ Pump

- ▶ Long-life V-Max™ packings, Chromex™ rod cylinder equates to less downtime
- ▶ QuikAccess intake valve to easily clean or clear debris—keeps the customer spraying

Lighted Power Plug

- ▶ Lighted plug gives quick, positive indication that sprayer has power
- ▶ Ideal for trouble-shooting on the jobsite

Hour Meter

- ▶ Instantly tracks how long the unit has been spraying
- ▶ Helps plan preventative maintenance
- ▶ Aids in verifying and quantifying customer use



Easy to Clean

- ▶ Power Flush™ cleaning adaptor attaches to garden hose for fast flushing of material
- ▶ Clear supply and drain line for easy visual verification that lines are clean

Reliable DC Motor

- ▶ Runs quiet and allows you to run long extension cords

Comprehensive Warranty Coverage

- ▶ 1-year "Bumper to Bumper" warranty on entire unit
- ▶ Lifetime warranty on motor and gear drive

All the Features of the RentalPro 210 PC, Plus:

15% higher output flow and 40% higher hp TEFC motor than the RentalPro 210 PC—the power the professionals demand!

Rugged, Durable Cart

- ▶ Professional-duty high cart carries 5 gallon bucket
- ▶ Retractable handle with hose storage

SmartControl 1.0

- ▶ Delivers a consistent spray fan without pressure fluctuation at all spraying pressures
- ▶ Digital display shows pressure, gallons, and hours
- ▶ Delivers quality spray pattern with minimal fluctuation
- ▶ Ideal for smaller tips commonly used for fine finish work



Totally Enclosed Motor

- ▶ Suitable for solvent based coatings



Features



Two Solutions to Keep Your Sprayer Up and Running

Endurance Pump – 17C721

Pump features long-life V-Max Blue™ packings, Chromex™ rod and stainless steel sleeve, QuikAccess™ knock-off foot valve, and Reversible Inlet Seat making this the industry's longest lasting pump lowers.



Express Pump – 17J555

Features include V-Max Blue packings and stainless steel rod, making this perfect for lower volume paint usage.



Airless Sprayers

RentalPro 210 PC

The RentalPro 210 PC Electric Airless Sprayer is built to be easily portable, but rugged enough to stand up to your most demanding customers. The 210 PC's simplicity and reliability make it the perfect choice for the homeowner or the professional who sprays a wide range of coatings.

DESCRIPTION	PART #
210 PC	17C303
SPECIFICATIONS	
MAX TIP SIZE:	0.021
MAX GPM (LPM):	0.47 (1.8)
MAX PSI (BAR):	3000 (207)
MOTOR:	5/8 HP DC

INCLUDES

- FTx™ Gun
- RAC X™ 515 SwitchTip™ and Guard
- 1/4 in X 50 ft (6.4 mm x 15 m) DuraFlex™ Airless Hose

RentalPro 230 PC

The RentalPro 230 PC is a solid workhorse sprayer with performance to cover both interior and exterior painting needs. The RentalPro 230 PC is the ideal sprayer for rental yards.

DESCRIPTION	PART #
230 PC	17C407
SPECIFICATIONS	
MAX TIP SIZE:	0.023
MAX GPM (LPM):	0.54 (2.0)
MAX PSI (BAR):	3300 (227)
MOTOR:	7/8 TEFC DC

INCLUDES

- FTx™ Gun
- RAC X™ 515 SwitchTip and Guard
- 1/4 in X 50 ft (6.4 mm x 15 m) Bluemax™ II Airless Hose

Gas Sprayers

GMAX® II 3900

With a 120 cc Honda engine and additional features for increased productivity, the GMAX II 3900 can handle up to two guns and is ideal for the professional contractor who sprays a wide variety of coatings.

SERIES	PART #
3900 STANDARD	16W865
3900 LO-BOY	16W866

SPECIFICATIONS	
MAX TIP SIZE:	0.036-1 Gun 0.023-2 Guns
MAX GPM (LPM):	1.25 (4.7)
MAX PSI (BAR):	3300 (227)
ENGINE CC (HP):	Honda 120 (4.0)

- INCLUDES**
STANDARD AND LO-BOY UNITS:
- Contractor Gun
 - RAC X 517 SwitchTip and Guard
 - 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless Hose



Standard model

Lo-Boy model

Features

Exclusive Advantage Drive™ System

- ▶ Time-tested drive system with lifetime guarantee for ultimate peace of mind
- ▶ Hardened steel gears run extremely quiet
- ▶ Auto adjust/alignment system

SmartControl™ 3.0

- ▶ Precision pressure control that delivers a consistent spray fan without pressure fluctuations
- ▶ Lowest dead band at any pressure

Endurance Pump

- ▶ Most rugged and reliable pump on the market today
- ▶ Long-life V-Max Blue™ packings
- ▶ Chromex™ rod and stainless steel sleeve deliver superior reliability and life

Chrome Plated, Welded Steel Cart

- ▶ Rugged welded steel construction
- ▶ Integrated hose rack with retractable handle
- ▶ Lift handles offer convenient grab points
- ▶ Tubed pneumatic wheels roll easily on all surfaces



SMARTCONTROL™



ENDURANCE
ADVANTAGE

Accessories

FOR AIRLESS PAINT SPRAYERS

AIRLESS GUNS

- 288430 FTx Gun (4-finger trigger) with RAC X 515 Tip and Guard
- 288429 FTx Gun (2-finger trigger) with RAC X 515 Tip and Guard
- 288420 Contractor Gun (2-finger trigger) with RAC X 517 Tip and Guard
- 288425 Contractor Gun (4-finger trigger) with RAC X 517 Tip and Guard
- 288488 Contractor/FTx Gun Repair Kit



BLUEMAX II AIRLESS HOSE

- 240793 1/4 in x 25 ft (6.4 mm x 7.5 m) BlueMax II 3300 psi (227 bar) Airless Hose
- 240794 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II 3300 psi (227 bar) Airless Hose



RAC X SWITCHTIPS™

- LTXxxx RAC X SwitchTips – Blue (Odd #) It has the longest lasting fan pattern on the market. 4050 psi (280 bar, 28.0 MPa)

Fan Width	.011"	.013"	.015"	.017"	.019"
8" - 10" 10" - 12"	411	413	415 515	417 517	519

Use with Lacquers to Mastics and Latex Paints.
Example: For a tip with a .015" orifice and a 10 in pattern, order LTX515.

- 246215 RAC X HandTite Guard – 7/8 in (22 mm) thread size, standard Graco thread

Material Chart						
		Light		Medium	Heavy	
Speed	Tip Sizes	Stains Trim, Doors Decks	Enamels Decorative, Moldings, Woodwork	Oil Based Primers	Interior Paints	Exterior Paints
Slower ↑ Faster	.011"	X				
	.013"	X	X	X		
	.015"		X	X	X	X
	.017"			X	X	X
	.019"				X	X

RentalPro Spray Tips

Maximize your rental revenue and increase customer satisfaction with RentalPro spray tips. RentalPro tips are limited life, one-time-use tips which are sold at a discount. With RentalPro tips you can be confident that your customer will leave with a working tip—ensuring a successful rental.

RNTxxx – RentalPro Spray Tips



- 24C746 – RentalPro Tip Guard

JETROLLER SYSTEM

- 24U172 JetRoller System – Includes: 9 in Roller Handle Assembly, 12 in Roller Handle Extension, 20 in Heavy-Duty Extension, CleanShot Shut-Off Valve, RAC X 721 SwitchTip and Guard, Contractor In-Line Valve



EASY OUT GUN FILTERS

- 287032 FTx Gun Easy Out Filter – Black, 60 Mesh, 1 per card
- 287033 FTx Gun Easy Out Filter – Blue, 100 Mesh, 1 per card
- 287034 FTx Gun Easy Out Filter – 60 and 100 Mesh

FLUIDS

- 243103 Pump Armor™ – 1 Quart (1 l)
- 245133 Pump Armor – 1 Gallon (3.8 Liter) Use Graco's exclusive Pump Armor for long term pump storage to prohibit harmful rust and corrosion
- 206994 Throat Seal Liquid (TSL™) – 8 oz (.24 l) Prolong the life of your pump by routinely adding TSL to your pump's wet cup

JetRoller™ System

Lightweight and portable, the JetRoller consists of a spray roller, a spray extension and a hand roller in one complete kit. It fits existing airless sprayers and is the ideal time-saving addition to your painting arsenal. The JetRoller combines rolling and spraying into one action, saving time and labor on spray/back roll projects. Ideal for rough or porous surfaces, the JetRoller minimizes overspray and delivers a consistent quality finish.



RTX Texture

RentalPro RTX 2000Pi

DESCRIPTION
RTX 2000Pi

PART #
17H574

SPECIFICATIONS
 MAX GPM (LPM): 2.0 (7.6)
 MAX PSI (BAR): 70 (4.8)
 CFM (CM) @ 20 PSI: 6.1 (.17)
 HOPPER GAL (L): 13 (49)
 MOTOR TYPE: AC
 MOTOR HP: 1.7
 VOLTAGE: 120V
 MAX HOSE FT (M): 50 (15.4)

INCLUDES
 • 1 in x 25 ft Material Hose
 • 3/8 in x 25 ft Air Hose
 • Heavy Duty Texture Gun
 • 3mm, 4mm, 6mm, 8mm, 10mm, 12mm Round Nozzles
 • WideTex Adapter with 4mm, 6mm, 8mm, 10mm, 12mm, XL W Tips

RentalPro RTX 5000Pi

DESCRIPTION
RTX 5000Pi

PART #
17H576

SPECIFICATIONS
 MAX GPM (LPM): 5.0 (19)
 MAX PSI (BAR): 100 (6.9)
 CFM (CM) @ 20 PSI: 8.6 (.24)
 HOPPER GAL (L): 15 (57)
 MOTOR TYPE: DC Brushless
 MOTOR HP: 2.0
 VOLTAGE: 120V
 MAX HOSE FT (M): 100 (30)

INCLUDES
 • 1 in x 25 ft Material Hose
 • 3/8 in x 25 ft Air Hose
 • Heavy Duty Texture Gun
 • 3mm, 4mm, 6mm, 8mm, 10mm, 12mm Round Nozzles
 • WideTex Adapter with 4mm, 6mm, 8mm, 10mm, 12mm, XL W Tips

The **RTX Pro Interior Series** delivers an optimized texture system perfect for tradesmen and contractors seeking the time-saving features required for medium-to-large jobs. This professional solution is designed for increased productivity to get you on and off the job site faster.

PRO INTERIOR SERIES



▶ Large 13-Gallon Capacity Hopper
 ▶ 120V AC Electric Motor

▶ Extra Large 15-Gallon Capacity Hopper
 ▶ 120v MaxPower™ Brushless DC Motor with 15/20 amp switch

Features Include:

- RotoFlex Pump
- High-Output Air Compressor
- FlexChange Pump Section

PLUS

SmartStart™ System

- ▶ Innovative system automatically starts pump and compressor when gun trigger is pulled, and shuts them off when released
- ▶ Provides a soft-start to eliminate material blast that can impact finish quality
- ▶ Reduces noise and vibration
- ▶ Extends pump and compressor life

MaxPower™ DC Motor (RTX 5000Pi only)

- ▶ Allows the trouble-free use of long extension cords with less circuit breaker issues
- ▶ Totally-enclosed, fan-cooled design protects the motor from dust, dirt and other debris
- ▶ Brushless design means you never need to replace brushes
- ▶ Run in high-output 20 amp mode, or set to 15 amps for jobs with power limitations

Twin-Cylinder Air Compressor (RTX 5000Pi only)

- ▶ High-output design delivers more air for demanding finishes
- ▶ Maintenance-free design
- ▶ Runs at lower RPM for longer life

WideTex Tips & Adapter

- ▶ Allows spraying in a uniform fan pattern
- ▶ Spray repeatable patterns with less material and pressure adjustment
- ▶ Increases productivity by more than 20%

Heavy-Duty Aluminum Trigger Gun with Integrated Prime Selector

- ▶ Durable aluminum design
- ▶ Oversized fluid/air passages
- ▶ Allows unit to be put in prime mode right at the gun!

1-inch Skip-Bond Material/Air Hose

- ▶ Both hoses permanently bonded for easy handling
- ▶ Offers more flexibility than ever before!

Accessories

FOR AIRLESS TEXTURE SPRAYERS

TEXTURE GUNS

288628 RTX 900/1250 Air Spray Trigger Gun
 24S134 RTX 1500, 2000Pi and 5000Pi Air Spray Trigger Gun with Threaded Connection

NOZZLES

For use on Pole Guns and FlexHead Guns

190943 3/16 in (5 mm) Nozzle
 190944 1/4 in (6 mm) Nozzle
 190945 5/16 in (8 mm) Nozzle
 190946 3/8 in (9.5 mm) Nozzle

For use on RTX 650, 900, 1250 and Hopper Guns

234153 Spray Nozzle Kit
 ▶ Includes 1 each of 4 mm, 6 mm, 8 mm and 12 mm nozzles.

For use on RTX Heavy-Duty Texture Gun

15C883 3 mm Nozzle
 15C884 4 mm Nozzle
 15C885 6 mm Nozzle
 15C886 8 mm Nozzle
 15C887 10 mm Nozzle
 15C888 12 mm Nozzle

For use on RTX Heavy-Duty Texture Gun

24S142 WideTex Accessory Kit
 24S143 WideTex Accessory Kit, Hardened
 24S136 WideTex Tip, Hardened, w4, 6-Pack
 24S137 WideTex Tip, Hardened, w6, 6-Pack
 24S138 WideTex Tip, Hardened, w8, 6-Pack
 24S139 WideTex Tip, Hardened, w10, 6-Pack
 24S140 WideTex Tip, Hardened, w12, 6-Pack
 24S141 WideTex Tip, Hardened, wXL, 6-Pack



KITS

287328 RTX 5000Pi External Air Kit
 ▶ Connect a separate air compressor for increased atomization energy

HOSE KITS

17J454 RTX 900, 1250 and 1400Si Braided Hose Kit: 3/4 in x 25 ft (19 mm x 7.5 m) Fluid Hose and 3/8 in x 25 ft (9.5 mm x 7.5 m) Air Hose

RTX STANDARD REPLACEMENT HOSE

17J454 Blue Translucent Hose Kit: 3/4 in x 25 ft (19 mm x 7.5 m)
 17J420 Blue Translucent Hose Kit: 1 in x 25 ft (25.4 mm x 7.5 m)
 17L001 Blue Translucent Hose Kit: 1 in x 35 ft (25.4 mm x 10.7 m)
 17J421 Blue Translucent Hose Kit: 1 in x 50 ft (25.4 mm x 15 m)
 17L004 Blue Translucent Hose Kit: 1-1/4 in x 25 ft (31.7 mm x 7.5 m)
 17L006 Blue Translucent Hose Kit: 1-1/4 in x 35 ft (31.7 mm x 10.7 m)
 17L008 Blue Translucent Hose Kit: 1-1/4 in x 50 ft (31.7 mm x 15 m)

HEAVY-DUTY HOSE

17L010 Blue Solid Heavy-Duty Hose Kit: 1 in x 10 ft (25.4 mm x 3 m) Whip
 17L000 Blue Solid Heavy-Duty Hose Kit: 1 in x 25 ft (25.4 mm x 7.5 m)
 17L002 Blue Solid Heavy-Duty Hose Kit: 1 in x 35 ft (25.4 mm x 10.7 m)
 17L003 Blue Solid Heavy-Duty Hose Kit: 1 in x 50 ft (25.4 mm x 15 m)
 17L005 Blue Solid Heavy-Duty Hose Kit: 1-1/4 in x 25 ft (31.7 mm x 7.5 m)
 17L007 Blue Solid Heavy-Duty Hose Kit: 1-1/4 in x 35 ft (31.7 mm x 10.7 m)
 17L009 Blue Solid Heavy-Duty Hose Kit: 1-1/4 in x 50 ft (31.7 mm x 15 m)

REPLACEMENT PUMP HOSE

287314 RotoFlex HD Pump Hose: For use with TexSpray RTX 1500, RTX 5000Pi, RTX 5000Px, RTX 5500Px
 288623 RotoFlex II Pump Hose: For use with TexSpray RTX 900, RTX 1250, RTX 1400Si, RTX 2000Pi

ADDITIONAL ACCESSORIES

248515 Sponge Ball Clean-Out Kit: For 1 in (25 mm) ID Hose Qty 5
 17L012 Sponge Ball Clean Out Kit: For 1-1/4 in ID Hose Qty 5 per pack




G-Force™ II Pressure Washers

Choose the Pressure Washer that's Right for Your Needs.

Direct Drive vs. Belt Drive


Pressure washers are not complex machines: a gasoline engine powers a pump that delivers pressurized fluid to a gun at the end of a wand attached to a hose. Understanding the difference, however, between the two main types of pressure washers will help you make the right purchase.

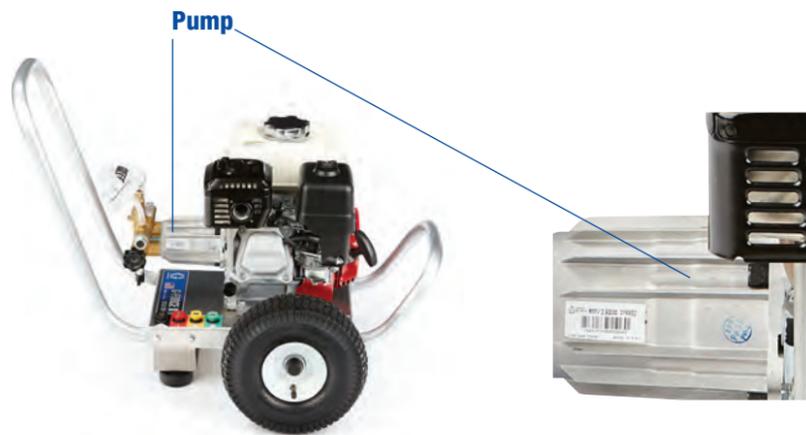

Direct Drive

A direct drive pressure washer has a pump with a hollow shaft that slides directly onto the drive shaft of the engine, and a body that bolts directly to the engine's housing. Because the pump is connected directly to the engine shaft, the pump rpm matches that of the engine (usually around 3500 rpm). Direct drive pressure washers offer these benefits:

- Compact design
- Lighter weight
- Fewer components

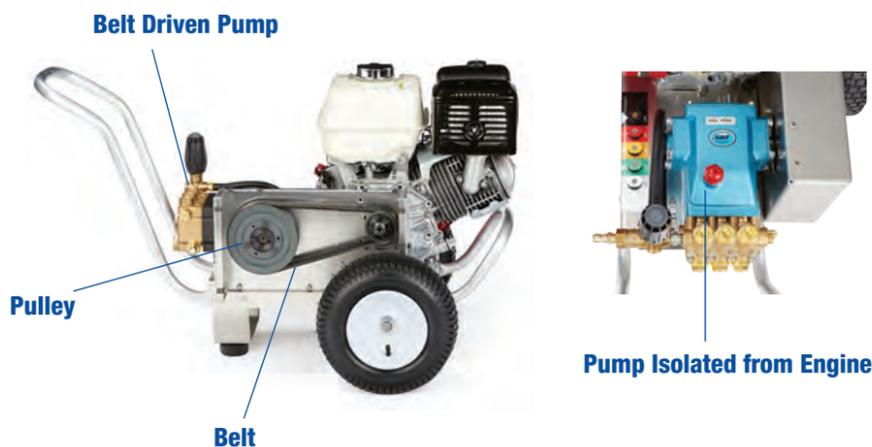

Belt Drive

A belt-driven pressure washer has a pump outfitted with a pulley that's driven by a belt that runs around a pulley attached to the engine. The pulley system allows the pump to run at a much lower RPM than a direct drive pump (typically 900-1700 RPM). Additionally, a belt-driven pump has a crankcase with more oil capacity, and the pump itself is mounted away from the engine, isolating it from the heat the engine creates. These factors, combined with the lower RPM, allow the pump to run much cooler than a direct drive pump. And because the pump is not mounted to the engine, it vibrates less and suffers less pump fatigue. Belt drive pressure washers offer these benefits:

- Lower RPM
- Lower operating temperature
- Less vibration and pump fatigue
- Increased pump life



Direct Drive • Light Duty

The G-Force II 2525 DD, 2532 DD and 3027 DD are the best choices for medium duty applications. They're light, compact and the perfect choice when you need consistent reliability for the occasional cleaning job.



Features

Heavy-Gauge Aluminum Frame

- ▶ Compact, durable and lightweight for easy loading and maneuverability
- ▶ Resists corrosion from water and chemicals—*will not rust like steel!*
- ▶ Lifetime frame warranty

Honda® Engine

- ▶ Honda GC and GX series engines deliver trouble-free performance
- ▶ Oil Alert automatically shuts down the engine in the event of low oil and prevents engine damage (2532 DD and 3027 DD models only)

Direct Drive Pump

- ▶ Lightweight, compact AR axial piston pump (2525 DD and 2532 DD models only)
- ▶ Higher output general triplex plunger pump with forged brass manifold (3027 DD model only)
- ▶ Thermal sensor prevents pump from overheating in bypass mode

Adjustable Pressure with Integrated Unloader

- ▶ Adjust pressure to match the application

G-Force II 2525 DD, 2532 DD and 3027 DD Includes:

- ▶ High-pressure Gun and Wand
- ▶ 25 ft Non-marking Hose (2525 DD)
- ▶ 50 ft Non-marking Hose (2532 DD and 3027 DD)
- ▶ 50-Mesh Inlet Filter
- ▶ Chemical Injector Kit
- ▶ 4 Quick-Connect Spray Tips (0°, 15°, 25°, Chemical)

POWERED by HONDA



G-Force II 2525 DD

DESCRIPTION	PART #
2525 DD	24U626
SPECIFICATIONS	
OPERATING PSI (BAR):	2500 (172)
HONDA ENGINE (HP):	GC190 (4.6)
FLOW RATE GPM (LPM):	2.5 (9.5)
PUMP TYPE:	AR Radial Axial, Aluminum HD

G-Force II 2532 DD

DESCRIPTION	PART #
2532 DD	24U619
SPECIFICATIONS	
OPERATING PSI (BAR):	3200 (221)
HONDA ENGINE (HP):	GX200 (5.5)
FLOW RATE GPM (LPM):	2.5 (9.5)
PUMP TYPE:	AR Radial Axial, Brass HD

G-Force II 3027 DD

DESCRIPTION	PART #
3027 DD	24U620
SPECIFICATIONS	
OPERATING PSI (BAR):	2700 (186)
HONDA ENGINE (HP):	GX200 (5.5)
FLOW RATE GPM (LPM):	3.0 (11.4)
PUMP TYPE:	General Triplex

G-Force II 3032 DD

DESCRIPTION	PART #
3032 DD	24U621
SPECIFICATIONS	
OPERATING PSI (BAR):	3200 (221)
HONDA ENGINE (HP):	GX270 (8.5)
FLOW RATE GPM (LPM):	3.0 (11.4)
PUMP TYPE:	General Pump Triplex

G-Force II 4040 DD

DESCRIPTION	PART #
4040 DD	24U622
SPECIFICATIONS	
OPERATING PSI (BAR):	4000 (276)
HONDA ENGINE (HP):	GX390 (11.7)
FLOW RATE GPM (LPM):	4.0 (15.1)
PUMP TYPE:	General Pump Triplex

G-Force II 4040 DDC

DESCRIPTION	PART #
4040 DDC	24U623
SPECIFICATIONS	
OPERATING PSI (BAR):	4000 (276)
HONDA ENGINE (HP):	GX390 (11.7)
FLOW RATE GPM (LPM):	4.0 (15.1)
PUMP TYPE:	Cat [®] Triplex

G-FORCE II 3032 DD, 4040 DD & 4040 DDC INCLUDES:

- High-pressure Gun and Wand with Quick-Connect Fittings
- 50 ft Non-marking Hose
- 50-Mesh Inlet Filter
- Chemical Injector Kit
- 5 Quick-Connect Spray Tips (0°, 15°, 25°, 40°, Chemical)

Direct Drive • Contractor Duty

Built tough to handle weekly use, the G-Force II 3032 DD, 4040 DD and 4040 DDC deliver high flow and pressure in a compact, durable package.



3032 DD model



4040 DD model



4040 DDC model

Features

Heavy-Gauge Aluminum Frame

- ▶ Compact, durable and lightweight for easy loading and maneuverability
- ▶ Resists corrosion from water and chemicals—*will not rust like steel!*
- ▶ Lifetime frame warranty

Honda[®] Engine

- ▶ GX series industrial-grade engine delivers trouble-free performance
- ▶ Oil Alert automatically shuts down the engine in the event of low oil and prevents engine damage

Direct Drive Pump


- ▶ High-performance, compact Triplex Plunger Pump mounted directly to the engine
 - DD models: General Triplex Plunger Pump
 - 4040 DDC model: Cat Triplex Plunger Pump—the most durable, longest-lasting pump in the industry
- ▶ Thermal sensor prevents pump from overheating in bypass mode

External Variable Pressure Unloader

- ▶ Adjust pressure to match the application
- ▶ Allows more water into the system to protect against overheating
- ▶ Extremely durable

EZ Start Pressure Relief

- ▶ Eliminates back pressure for easy engine starting

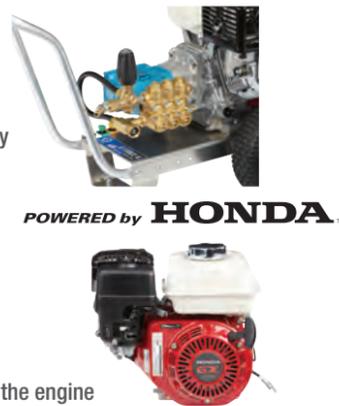

POWERED by HONDA

Belt Drive • Heavy Duty

The G-Force II 4040 BD and 4040 BDC pressure washers are Graco's top-of-the-line units, designed to tackle the toughest cleaning jobs. With the highest performance available for tough, day-long cleaning and surface preparation jobs, these models can easily handle even the most demanding jobs.



4040 BD model



4040 BDC model

Features

Heavy-Gauge Aluminum Frame

- ▶ Compact, durable and lightweight for easy loading and maneuverability
- ▶ Resists corrosion from water and chemicals—*will not rust like steel!*
- ▶ Lifetime frame warranty

Honda[®] Engine

- ▶ GX series industrial-grade engine delivers trouble-free performance
- ▶ Oil Alert automatically shuts down the engine in the event of low oil and prevents engine damage

Belt-Driven Pump

- ▶ Triplex Plunger Pump runs slower and cooler for increased durability
 - 4040 BD model: General Triplex Plunger Pump
 - 4040 BDC model: Cat Triplex Plunger Pump—the most durable, longest-lasting pump in the industry
- ▶ Thermal Relief Valve protects pump from overheating

External Variable Pressure Unloader

- ▶ Adjust pressure to match the application
- ▶ Allows more water into the system to protect against overheating
- ▶ Extremely durable

EZ Start Pressure Relief

- ▶ Eliminates back pressure for easy engine starting

G-Force II 4040 BD

DESCRIPTION	PART #
4040 BD	24U624
SPECIFICATIONS	
OPERATING PSI (BAR):	4000 (276)
HONDA ENGINE (HP):	GX390 (11.7)
FLOW RATE GPM (LPM):	4.0 (15.1)
PUMP TYPE:	General Pump Triplex

G-Force II 4040 BDC

DESCRIPTION	PART #
4040 BDC	24U625
SPECIFICATIONS	
OPERATING PSI (BAR):	4000 (276)
HONDA ENGINE (HP):	GX390 (11.7)
FLOW RATE GPM (LPM):	4.0 (15.1)
PUMP TYPE:	Cat Triplex

G-FORCE II 4040 BD & 4040 BDC INCLUDES:

- High-pressure Gun and Wand with Quick-Connect Fittings
- 50 ft Non-marking Hose
- 50-Mesh Inlet Filter
- Chemical Injector Kit
- 5 Quick-Connect Spray Tips (0°, 15°, 25°, 40°, Chemical)




Tip Selection Guide

ROTATING AND OSCILLATING TIPS




Rotating and oscillating tips increase your cleaning power and decrease your cleaning time. They offer 0° spray impact with 25° coverage. Tips include filter with quick connect and offer heavy-duty components for long life and reliability. Can be used on sidewalks, driveways, track vehicles, muddy areas, old peeling paints and concrete surfaces.



Rotating Tip (4000 psi)
Part No. 198012

Rotating Tip (5000 psi)
Part No. 198014

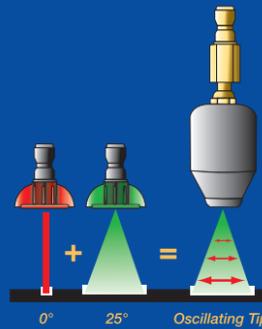

Oscillating Tip (5000 psi)
Part No. 198013

TIP ORIFICE SIZE

You can maximize your cleaning power by selecting the tip that best matches the maximum pressure and flow of your pressure washer from the chart below.

For lower pressure spraying, choose a larger size tip to maximize your flow and cleaning power.

GPM	1500 PSI	2000 PSI	2500 PSI	3000 PSI	3500 PSI	4000 PSI
2.0	3.5	3.0	3.0	3.0	3.0	3.0
2.5	4.0	3.5	3.0	3.0	3.0	3.0
3.0	5.0	4.5	4.0	3.5	3.0	3.0
3.5	5.5	5.0	4.5	4.0	3.5	3.5
4.0	5.5	5.5	5.0	4.5	4.5	4.0

TIP ANGLE

Different tip angles are used for different jobs as noted in the chart below.

	0 DEGREE RED	15 DEGREE YELLOW	25 DEGREE GREEN	40 DEGREE WHITE	CHEMICAL BLACK
DESCRIPTION	Cutting Tip	Chiseling Tip	Flushing Tip	Washing Tip	Chemical Tip
USE	Delivers a concentrated stream that can gouge or cut.	Works like a scraper when used at a 40° angle.	Most common nozzle for general cleaning.	Wide spray for washing or rinsing a large area.	Low pressure nozzle for use with detergent injector.
TYPICAL JOBS	Removing stains from concrete or other hard surfaces.	Stripping paint; removing grease, mildew and stains.	Cleaning dirt from siding, sidewalks, outdoor furniture, etc.	Washing vehicles, windows, aluminum siding and other delicate surfaces.	Applying detergent, misting and rinsing.

TIP PART NUMBERS

Use the chart below to find the right Graco G-Force II tip part number.

ORIFICE SIZE	0 DEGREE RED	15 DEGREE YELLOW	25 DEGREE GREEN	40 DEGREE WHITE	SET OF 4 TIPS (0, 15, 25, 40)
3.0	805535	805536	805537	805538	244768
3.5	805539	805540	805541	805542	244769
4.0	805543	805544	805545	805546	800708
4.5	805547	805548	805549	805550	800709
5.0	805551	805552	805553	805554	N/A
5.5	805555	805556	805557	805558	N/A
			CHEMICAL INJECTOR TIP		805634

Accessories

FOR G-FORCE II PRESSURE WASHERS

GUNS

- 127469 Gun with 36 inch Wand – Fits 2525 DD, 2532 DD
Maximum Working Pressure: 3200 psi (220 bar, 22.0 MPa)
- 244784 Professional Grade Gun with 36 inch Wand *Max. Working Pressure: 4000 psi (276 bar, 27.6 MPa)*

EXTENSIONS – *Maximum Working Pressure: 4000 psi (276 bar, 27.6 MPa)*

- 116564 Telescoping Wand Extension: 6-18 ft (5.49 m)
- 16X669 Telescoping Wand Extension: 6-24 ft (5.49 m)
- 16X670 Tele-Pole Belt – For use with Telescoping Wand Extensions
- 17A534 Wand Extension: 12 in (0.30 m)
- 17A535 Wand Extension: 3 ft (0.91 m)
- 17A536 Wand Extension: 4 ft (1.22 m)
- 16X668 Wand Extension: 6 ft (1.82 m)
- 17A537 Wand Extension: 8 ft (2.43 m)
- 17A538 Wand Extension: 10 ft (3.0 m)



HOSE REELS AND NON-MARKING HOSE

- 16X665 Hose Reel Kit: 100 ft (30.48 m) hose capacity, 3500 psi (241 bar, 24.1 MPa) rating
- 16X664 Hose Reel Kit: 100 ft (30.48 m) hose capacity, 5000 psi (344 bar, 34.4 MPa) rating
- 16E286 3/8 in x 25 ft (10 mm x 7.5 m) Hose with Threaded Connection
3500 psi (241 bar, 24.1 MPa) – For use with 2525 DD
- 127534 3/8 in x 50 ft (10 mm x 15 m) Hose with Threaded Connection
4000 psi (276 bar, 27.6 MPa) rating – For use with 2532 DD
- 244783 3/8 in x 50 ft (10 mm x 15 m) Non-marking Hose with Quick Disconnects
4000 psi (276 bar, 27.6 MPa) – For use with 3027 DD, 3032 DD, 4040 DD, 4040 DDC, 4040 BD, 4040 BDC
- 16X667 3/8 in x 100 ft (10 mm x 30.48 m) Non-marking Hose with Quick Disconnects
4000 psi (276 bar, 27.6 MPa) – For use with 2532 DD, 3027 DD, 3032 DD, 4040 DD, 4040 DDC, 4040 BD, 4040 BDC



WET SANDBLASTING

- 244766 Sandblasting Kit – Includes: fittings, couplers, clamps, adapters, housing sealant and hose assembly (tip not included) *Maximum Working Pressure: 4000 psi (276 bar, 27.6 MPa)*
- 805313 Sand Blast Tip – Fits 2525 DD, 2532 DD, 3027 DD
- 805316 Sand Blast Tip – Fits 3032 DD
- 805321 Sand Blast Tip – Fits 4040 DD, 4040 DDC, 4040 BD, 4040 BDC



HORIZONTAL SURFACE CLEANER – *Maximum Working Pressure: 4000 psi (276 bar, 27.6 MPa)*

- 16X666 18 in (45.7 cm) diameter
- 116562 20 in (50.8 cm) diameter

COUPLERS AND ATTACHMENTS

- 127529 Kit, Inline Chemical Injector with QDs, Fixed 10% ratio
- 127506 Kit, Chemical Injector, Radial Axial Pumps – Fits 2525 DD, 2532 DD
- 801112 Mesh Pump Inlet Screen
- 16X680 Gutter Cleaning Attachment
- 16X679 Ball Valve Water Shutoff
- 16X682 Parts Box – Holds tips, plugs, sockets and O-rings
- 16X671 Female Socket, 5000 psi 1/4 in HP Quick Disconnect
- 16X672 Female Socket, 4000 psi 3/8 in HP Quick Disconnect
- 16X673 Male Socket, 5000 psi 1/4 in HP Quick Disconnect
- 16X674 Male Socket, 4000 psi 3/8 in HP Quick Disconnect
- 16X675 Female Plug, 5000 psi 1/4 in HP Quick Disconnect
- 16X676 Female Plug, 4000 psi 3/8 in HP Quick Disconnect
- 16X677 Male Plug, 5000 psi 1/4 in HP Quick Disconnect
- 16X678 Male Plug, 4000 psi 3/8 in HP Quick Disconnect
- 127533 Fitting, Hose 22 mm Threaded Connection



FLUID

- 246377 Pump Oil, 32 oz – Use only with Triplex Plunger Pumps



PAINT SPRAYER SPECIFICATIONS



		RentalPro 210 PC	RentalPro 230 PC	GMAX II 3900
SPECIFICATIONS	MODEL Part Number	17C303	17C407	Standard-16W865 Lo-Boy-16W866
	Maximum Tip Size	0.021	0.023	0.036
	Maximum psi (bar)	3000 (207)	3300 (227)	3300 (227)
	Maximum gpm (lpm)	0.47 (1.8)	0.54 (2.0)	1.25 (4.7)
	Motor hp	5/8 DC	7/8 TEFC PC	—
	Engine	—	—	Honda 120 cc
	Compressor Air Output	—	—	—
	Weight lbs (kg)	35 (16)	65 (29)	109 (50)
	Generator Requirements:	3000W	3000W	—
INCLUDES	Gun	FTx	FTx	Contractor
	Hose	1/4 in x 50 ft (6.4 mm x 15 m) DuraFlex™ Airless	1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless	1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless
	Tip	RAC X 515	RAC X 515	RAC X 515
	Filter	—	Easy Out	Easy Out
	Hopper	—	—	—
WEAR PARTS	Repair Kit	244194	244194	248212
	Rod	24W617	24W617	Standard-248206 Lo-Boy-16X434
	Cylinder	24W619	24W619	17A030
	Sleeve	—	—	248209
	Intake Seat Kit	246429	246429	239922
REPLACEMENT PUMPS	Pump	Endurance™ 17C721 Express 17J555	Endurance™ 17C721 Express 17J555	287512
MANUALS	Operation	334600	334603	332919
	Parts	334600	334603	332921

TEXTURE SPRAYER SPECIFICATIONS



		RentalPro RTX 2000P1	RentalPro RTX 5000P1
PERFORMANCE	MODEL Part Number	17H574	17H576
	Max psi (bar)	70 (4.8)	100 (6.9)
	Max gpm (lpm)	2.0 (7.6)	5.0 (19)
COMPRESSOR	Motor	1.7 hp	2.0 hp
	Compressor Air Output	6.1 cfm at 20 psi .17 m ³ /min	8.6 cfm at 20 psi .24 m ³ /min
INCLUDES	Gun	Heavy-Duty Air Spray Trigger	Heavy-Duty Air Spray Trigger
	Hose	1 in x 25 ft (25.4 mm x 7.5 m)	1 in x 25 ft (25.4 mm x 7.5 m)
	Max Hose Length	50 ft (15.4 m)	100 ft (30 m)
	Tips	3 mm, 4 mm, 6 mm, 8 mm, 10 mm, 12 mm round nozzles WideTex Adapter with 4 mm, 6 mm, 8 mm, 10 mm, 12 mm, XL W tips	3 mm, 4 mm, 6 mm, 8 mm, 10 mm, 12 mm round nozzles WideTex Adapter with 4 mm, 6 mm, 8 mm, 10 mm WS tips, 12 mm, XL W tips
DIMENSIONS	Weight lbs (kg)	70 (31.7)	159 (72.1)
	Dimensions	22 W x 24 L x 41 H in (46 W x 56 L x 104 H cm)	23 W x 30 L x 41 H in (58 W x 76 L x 104 H cm)
	Hopper gal (liter)	13 (49)	15 (57)
MANUALS	Operation	3A3258	3A3265
	Repair	3A3258	3A3265
TYPICAL APPLICATIONS	Materials Sprayed	Simulated acoustic, drywall mud, acrylics, fillers	Simulated acoustic, drywall mud, acrylics, fillers, elastomerics, synthetic stucco, deck coatings
	Surfaces	Residential, Light Commercial	Residential, Light Commercial, Medium Commercial, Heavy Commercial, Industrial



G-FORCE II PRESSURE WASHER SPECIFICATIONS



		G-Force II 2525 DD	G-Force II 2532 DD	G-Force II 3027 DD	G-Force II 3032 DD
MODEL	Part Number	24U626	24U619	24U620	24U621
SPECIFICATIONS	Maximum psi (bar)	2500 (172)	3200 (221)	2700 (187)	3200 (221)
	Water Pump Flow Rate gpm (lpm)	2.5 (9.46)	2.5 (9.46)	3.0 (11.4)	3.0 (11.4)
	Honda Engine (hp)	GC190 (4.6)	GX200 (5.5)	GX200 (5.5)	GX270 (8.5)
	Fuel Tank Capacity qt (ltr)	1.9 (1.8)	3.3 (3.1)	3.3 (3.1)	5.6 (5.3)
	Weight lb (kg)	52 (23.5)	58.5 (26.5)	68.5 (31)	98.5 (44.5)
	Pump Type	Direct Drive, AR Radial Axial, Aluminum HD	Direct Drive, AR Radial Axial, Brass HD	Direct Drive, GP Triplex	Direct Drive, GP Triplex
	Gun	Standard Gun with Insulated Trigger	Standard Gun with Insulated Trigger	Professional Grade with Insulated Trigger	Professional Grade with Insulated Trigger
INCLUDES	Wand	36 inch (0.9 m) with 22 mm Threaded Fittings	36 inch (0.9 m) with 22 mm Threaded Fittings	36 inch (0.9 m) with Quick-Connect	36 inch (0.9 m) with Quick-Connect
	Hose	3/8 in x 25 ft (9.5 mm x 7.5 m) Non-Marking	3/8 in x 50 ft (9.5 mm x 15 m) Non-Marking	3/8 in x 50 ft (9.5 mm x 15 m) Non-Marking	3/8 in x 50 ft (9.5 mm x 15 m) Non-Marking
	Chemical Injector	Included	Included	Included	Included
	Tips	3.0 ORIFICE 0° Red - 805535 15° Yellow - 805536 25° Green - 805537 Black - Chemical Injector - 244768	3.5 ORIFICE 0° Red - 805539 15° Yellow - 805540 25° Green - 805541 Black - Chemical Injector - 244768	3.5 ORIFICE 0° Red - 805539 15° Yellow - 805540 25° Green - 805541 Black - Chemical Injector - 244768	3.5 ORIFICE 0° Red - 805539 15° Yellow - 805540 25° Green - 805541 40° White - 805542 Black - Chemical Injector - 244768
	System and Accessories	1 year coverage against defects in materials and workmanship	1 year coverage against defects in materials and workmanship	1 year coverage against defects in materials and workmanship	1 year coverage against defects in materials and workmanship
WARRANTY	Pump	1 year AR	1 year AR	5 year General	5 year General
	Honda Engine	90 day	3 year	3 year	3 year



		G-Force II 4040 DD	G-Force II 4040 DDC	G-Force II 4040 BD	G-Force II 4040 BDC
MODEL	Part Number	24U622	24U623	24U624	24U625
SPECIFICATIONS	Maximum psi (bar)	4000 (276)	4000 (276)	4000 (276)	4000 (276)
	Water Pump Flow Rate gpm (lpm)	4.0 (15.1)	4.0 (15.1)	4.0 (15.1)	4.0 (15)
	Honda Engine (hp)	GX390 (11.7)	GX390 (11.7)	GX390 (11.7)	GX390 (11.7)
	Fuel Tank Capacity qt (ltr)	6.4 (6.1)	6.4 (6.1)	6.4 (6.1)	6.4 (6.1)
	Weight lb (kg)	114.5 (52)	118.5 (53.75)	144.5 (65.5)	135.5 (61.5)
	Pump Type	Direct Drive, GP Triplex	Direct Drive, Cat Triplex	Belt Drive, GP Triplex	Belt Drive, Cat Triplex
	Gun	Professional Grade with Insulated Trigger			
INCLUDES	Wand	36 inch (0.9 m) with Quick-Connect			
	Hose	3/8 in x 50 ft (9.5 mm x 15 m) Non-Marking	3/8 in x 50 ft (9.5 mm x 15 m) Non-Marking	3/8 in x 50 ft (9.5 mm x 15 m) Non-Marking	3/8 in x 50 ft (9.5 mm x 15 m) Non-Marking
	Chemical Injector	Included	Included	Included	Included
	Tips	4.0 ORIFICE 0° Red - 805543 15° Yellow - 805544 25° Green - 805545 40° White - 805546 Black - Chemical Injector - 800708	4.0 ORIFICE 0° Red - 805543 15° Yellow - 805544 25° Green - 805545 40° White - 805546 Black - Chemical Injector - 800708	4.0 ORIFICE 0° Red - 805543 15° Yellow - 805544 25° Green - 805545 40° White - 805546 Black - Chemical Injector - 800708	4.0 ORIFICE 0° Red - 805543 15° Yellow - 805544 25° Green - 805545 40° White - 805546 Black - Chemical Injector - 800708
	System and Accessories	1 year coverage against defects in materials and workmanship	1 year coverage against defects in materials and workmanship	1 year coverage against defects in materials and workmanship	1 year coverage against defects in materials and workmanship
WARRANTY	Pump	5 year General	2 year Cat	5 year General	5 year Cat
	Honda Engine	3 year	3 year	3 year	3 year



ABOUT GRACO

PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7
1029 Zhongshan Road South
Huangpu District
Shanghai 200011
The People's Republic of China
Tel: 86 21 649 50088
Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 443, Augusta Point
Regus Business Centre 53
Golf Course Road
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-si, Korea 431-060
Tel: 82 31 476 9400
Fax: 82 31 476 9801

SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

Visit us at www.rentalpro.graco.com.



to every customer, every time

CEC Customer Service:

800-690-2894

(M-F, 7:30 am-5:30 pm CST)

Fax: 800-334-6955

Email: newfaxced@graco.com

CEC Tech Assistance:

844-241-9499

(M-F, 7:30 am-5:30 pm CST)

Graco Inc. is registered to I.S. EN ISO 9001



gracopartsbook.com

The fast and easy way to
look up common Graco parts.

