



# **Triton**°

Affordable fine finish spray packages for wood and metal applications

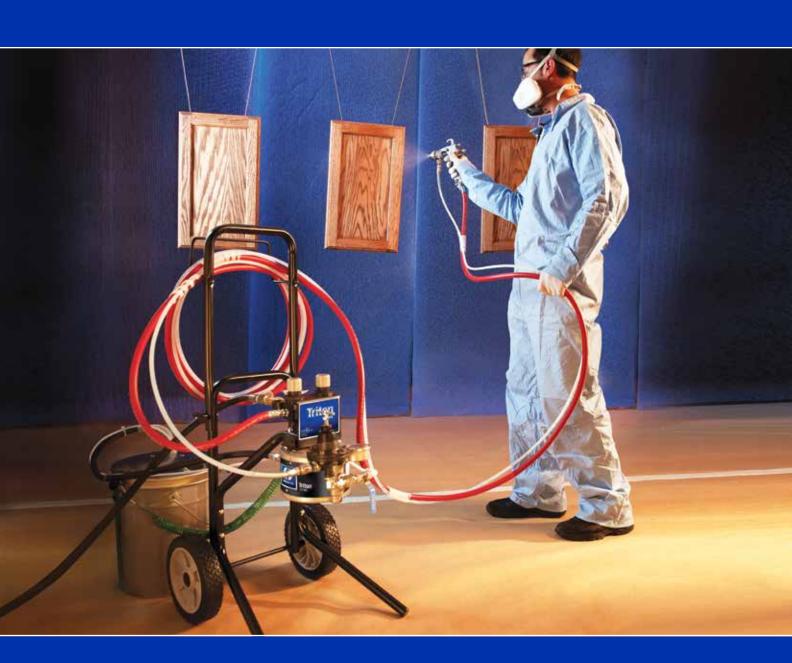

## Diaphragm spray packages designed specifically for the

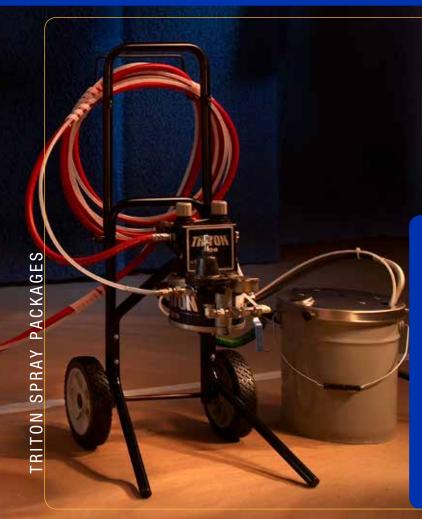

**Triton** is an air-operated diaphragm spray package that applies a high quality, decorative finish to wood and metal parts. Triton is a more effective alternative to traditional pressure pots and standard diaphragm pumps.

### **Features**

#### HIGH QUALITY FINISH

Low pulsation output and smooth pump changeover deliver a consistent spray pattern.

#### **EASY-TO-USE**

Quick color changes and fast material refills save time and money.

#### RUGGED CONSTRUCTION

Stainless steel or aluminum pump handles a wide variety of fluids.

### **Key Applications**

### Triton is designed for all types of metal and wood applications:

## Applying primers, basecoats and topcoats for:

- General Metal Fabrication
- · Farm and Construction
- Truck and Bus
- Automotive Components and Touch-up



## Spraying stains, sealers, lacquers and topcoats for:

- Wood Furniture and Cabinetry
- Wood Windows and Doors
- Customized Wood



## Using a wide range of technologies:

- Conventional
- HVLP
- Compliant
- Electrostatic Air Spray



## e finishing market

## **Best Spray Finishing Package in its Class!**

### Available with AirPro<sup>®</sup> Spray Guns and Pro Xp<sup>™</sup> Electrostatic Spray Guns



## **Upgrade Your Pumps!**

### **Upgrade Your Standard Diaphragm Pumps to Triton**

### **High-Performance Finishing**

#### LONGER PUMP LIFE

- Rugged stainless steel or aluminum construction requires less maintenance than a plastic pump
- Twice the output per stroke
- High output per stroke means less pump wear


#### **EXTRA PUMPING POWER**

 30% more suction power than a standard diaphragm pump to handle higher viscosity materials

#### LOW PULSATION OUTPUT!


#### SUPERIOR FINISH QUALITY

- Consistent pattern and film on parts
- Constant flow to the spray gun



Triton pump provides 50% less pressure pulsation than standard diaphragm pumps.

Note: Pump-to-pump comparison without fluid regulator



# **Upgrade Your Pressure Pots** and Cup Guns to Triton

### **Finishing Made Simple**

- Refill and monitor material level while spraying for easier operation
- Complete color changes in less than 3 minutes for reduced downtime
- Circulation valve saves time and lowers solvent usage during clean-up and color changes



## **Ordering Information**

Aluminum	Stainless Steel	Triton Package Part No.	Pail Mount	Stand Mount	Cart Mount	Wall Mount	Fluid Regulator*	Suction Hose	Air Hose 25 ft (7.6 m)	Fluid Hose 25 ft (7.6 m)	Applicator Part No.	Applicator Description
	ood Applica			WOUTE	Wount	WOUTE	negulator	11036	25 It (7.0 III)	23 11 (7.0 111)	rait No.	Applicator Description
•		289645	•				60	•	•	•	289110	AirPro HVLP Gun .040 in (1.0 mm) nozzle
	•	289642	•				100	•	•	•	289110	AirPro HVLP Gun .040 in (1.0 mm) nozzle
•		289646	•				60	•	•	•	289111	AirPro Compliant Gun .040 in (1.0 mm) nozzle
	•	289643	•				100	•	•	•	289111	AirPro Compliant Gun .040 in (1.0 mm) nozzle
•		289647	•					•	•	•	289109	AirPro Conventional Gun .040 in (1.0 mm) nozzle
	•	289644	•					•	•	•	289109	AirPro Conventional Gun .040 in (1.0 mm) nozzle
•		289638			•		60	•	•	•	289110	AirPro HVLP Gun .040 in (1.0 mm) nozzle
	•	289635			•		100	•	•	•	289110	AirPro HVLP Gun .040 in (1.0 mm) nozzle
•		289639			•		60	•	•	•	289111	AirPro Compliant Gun .040 in (1.0 mm) nozzle
	•	289636			•		100	•	•	•	289111	AirPro Compliant Gun .040 in (1.0 mm) nozzle
•		289640			•			•	•	•	289109	AirPro Conventional Gun .040 in (1.0 mm) nozzle
	•	289637			•			•	•	•	289109	AirPro Conventional Gun .040 in (1.0 mm) nozzle
•		289628				•	60		•	•	289110	AirPro HVLP Gun .040 in (1.0 mm) nozzle
	•	289625				•	100		•	•	289110	AirPro HVLP Gun .040 in (1.0 mm) nozzle
•		289629				•	60		•	•	289111	AirPro Compliant Gun .040 in (1.0 mm) nozzle
	•	289626				•	100		•	•	289111	AirPro Compliant Gun .040 in (1.0 mm) nozzle
•		289630				•			•	•	289109	AirPro Conventional Gun .040 in (1.0 mm) nozzle
	•	289627				•			•	•	289109	AirPro Conventional Gun .040 in (1.0 mm) nozzle
AirPro Ge	neral Meta	l Application	on Pack	ages								
•		233468	•					•	•	•	288931	AirPro Conventional Gun .055 in (1.4 mm) nozzle
	•	233469	•					•	•	•	288931	AirPro Conventional Gun .055 in (1.4 mm) nozzle
•		233470	•				60	•	•	•	288938	AirPro HVLP Gun .055 in (1.4 mm) nozzle
	•	233471	•				100	•	•	•	288938	AirPro HVLP Gun .055 in (1.4 mm) nozzle
•		234911	•				60	•	•	•	288945	AirPro Compliant Gun .055 in (1.4 mm) nozzle
	•	234912	•				100	•	•	•	288945	AirPro Compliant Gun .055 in (1.4 mm) nozzle
•		233475		•				•	•	•	288931	AirPro Conventional Gun .055 in (1.4 mm) nozzle
	•	233476		•				•	•	•	288931	AirPro Conventional Gun .055 in (1.4 mm) nozzle
•		233477		•			60	•	•	•	288938	AirPro HVLP Gun .055 in (1.4 mm) nozzle
	•	233478		•			100	•	•	•	288938	AirPro HVLP Gun .055 in (1.4 mm) nozzle
•		234913		•			60	•	•	•	288945	AirPro Compliant Gun .055 in (1.4 mm) nozzle
	•	234914		•			100	•	•	•	288945	AirPro Compliant Gun .055 in (1.4 mm) nozzle
•		233482			•			•	•	•	288931	AirPro Conventional Gun .055 in (1.4 mm) nozzle
	•	233483			•			•	•	•	288931	AirPro Conventional Gun .055 in (1.4 mm) nozzle
•		233484			•		60	•	•	•	288938	AirPro HVLP Gun .055 in (1.4 mm) nozzle
	•	233485			•		100	•	•	•	288938	AirPro HVLP Gun .055 in (1.4 mm) nozzle
•		234915			•		60	•	•	•	288945	AirPro Compliant Gun .055 in (1.4 mm) nozzle
	•	234916			•		100	•	•	•	288945	AirPro Compliant Gun .055 in (1.4 mm) nozzle
•		233489				•			•	•	288931	AirPro Conventional Gun .055 in (1.4 mm) nozzle
	•	233490				•			•	•	288931	AirPro Conventional Gun .055 in (1.4 mm) nozzle
•		233491				•	60		•	•	288938	AirPro HVLP Gun .055 in (1.4 mm) nozzle
	•	233492				•	100		•	•	288938	AirPro HVLP Gun .055 in (1.4 mm) nozzle
•		234917				•	60		•	•	288945	AirPro Compliant Gun .055 in (1.4 mm) nozzle
	•	234918				•	100		•	•	288945	AirPro Compliant Gun .055 in (1.4 mm) nozzle

 <sup>\*</sup>HVLP, Compliant, Pro Xp packages include fluid regulator:
 Aluminum packages use 60 psi (4 bar, 0.4 MPa) acetal fluid regulator.
 Stainless steel packages use 100 psi (7 bar, 0.7 MPa) stainless steel fluid regulator.

## **Ordering Information**



Aluminum	Stainless Steel	Triton Package Part No.	Pail Mount	Stand Mount	Cart Mount	Wall Mount	Fluid Regulator*	Suction Hose	Air Hose 25 ft (7.6 m)	Fluid Hose 25 ft (7.6 m)	Applicator Part No.	Applicator Description	
AirPro Waterbourne Application Packages													
	•	289632			•		100	•	•	•	288969	AirPro HVLP Gun .055 in (1.4 mm) nozzle	
	•	289633			•		100	•	•	•	288972	AirPro Compliant Gun .055 in (1.4 mm) nozzle	
	•	289634			•			•	•	•	288966	AirPro Conventional Gun .055 in (1.4 mm) nozzle	
	•	289622				•	100		•	•	288969	AirPro HVLP Gun .055 in (1.4 mm) nozzle	
	•	289623				•	100		•	•	288972	AirPro Compliant Gun .055 in (1.4 mm) nozzle	
	•	289624				•			•	•	288966	AirPro Conventional Gun .055 in (1.4 mm) nozzle	
Pro Xp Ele	ectrostatic	Gun Packa	iges	-									
•		233741	•				60	•	•	•	L40T10	Pro Xp40 Electrostatic Gun .055 in (1.4 mm) nozzle	
•		233742	•				60	•	•	•	L60T10	Pro Xp60 Standard Electrostatic Gun .055 in (1.4 mm) nozzle	
•		289648	•				60	•	•	•	L85T10	Pro Xp85 Standard Electrostatic Gun .055 in (1.4 mm) nozzle	
•		233743		•			60	•	•	•	L40T10	Pro Xp40 Electrostatic Gun .055 in (1.4 mm) nozzle	
•		233744		•			60	•	•	•	L60T10	Pro Xp60 Standard Electrostatic Gun .055 in (1.4 mm) nozzle	
•		289649		•			60	•	•	•	L85T10	Pro Xp85 Standard Electrostatic Gun .055 in (1.4 mm) nozzle	
•		233746			•		60	•	•	•	L40T10	Pro Xp40 Electrostatic Gun .055 in (1.4 mm) nozzle	
•		233747			•		60	•	•	•	L60T10	Pro Xp60 Standard Electrostatic Gun .055 in (1.4 mm) nozzle	
•		289641			•		60	•	•	•	L85T10	Pro Xp85 Standard Electrostatic Gun .055 in (1.4 mm) nozzle	
•		233748				•	60		•	•	L40T10	Pro Xp40 Electrostatic Gun .055 in (1.4 mm) nozzle	
•		233749				•	60		•	•	L60T10	Pro Xp60 Standard Electrostatic Gun .055 in (1.4 mm) nozzle	
•		289631				•	60		•	•	L85T10	Pro Xp85 Standard Electrostatic Gun .055 in (1.4 mm) nozzle	
Bare Pack	cages**									`			
•		233466	•					•				None	
	•	233467	•					•				None	
•		233473		•				•				None	
	•	233474		•				•				None	
•		233480			•			•				None	
	•	233481			•			•				None	
•		233487				•						None	
	•	233488				•						None	

HVLP, Compliant, Pro Xp packages include fluid regulator:
 Aluminum packages use 60 psi (4 bar, 0.4 MPa) acetal fluid regulator.
 Stainless steel packages use 100 psi (7 bar, 0.7 MPa) stainless steel fluid regulator.

<sup>\*\*</sup>Bare packages do not include hose and gun.

## **Ordering Information**

### **Ordering Information and Accessories**

#### **Bare Triton Pumps**

233500 Triton Pump, Aluminum 233501 Triton Pump, Stainless Steel

#### Spray Guns

Refer to the following gun brochures for additional part numbers:

AirPro Air Spray brochure, form #339377

Pro Xp Electrostatic Gun brochure, form #345131

#### **Accessory Air Bundled Hoses**

For hose extensions or replacement (includes air and fluid hoses, bundled together). 233498 Air/Fluid Hose, 25 ft (7.6 m) Nickel Plated Steel Couplings, fits AirPro Spray guns 233499 Air/Fluid Hose, 25 ft (7.6 m) Stainless Steel Couplings, fits AirPro Spray guns

240425 Air/Fluid Hose, 25 ft (7.6 m), fits Pro Xp guns

#### Air and Fluid Hoses

For hose extensions or replacement (separate air and fluid hoses)

244448 Air Hose, 25 ft (7.6 m), fits AirPro Spray guns 210868 Air Hose, 50 ft (15.2 m), fits AirPro Spray guns 223070 Air Hose, 25 ft (7.6 m) Grounded, fits Pro Xp guns

244447 Fluid Hose, 25 ft (7.6 m) Nickel Plated Steel Couplings, fits AirPro Spray guns

235339 Fluid Hose, 25 ft (7.6 m) Stainless Steel Couplings, fits AirPro Spray guns

215637 Fluid Hose, 25 ft (7.6 m), fits Pro Xp guns 215638 Fluid Hose, 50 ft (15.2 m), fits Pro Xp guns

#### **Suction Hoses**

Order a suction hose (5 gal/18.9 I or 55 gal/200 I) for wall-mount applications.

245082 Aluminum, 4 ft (1.2 m), for 5 gal (18.9 l) pail 245083 Stainless Steel, 4 ft (1.2 m), for 5 gal (18.9 l) pail

Aluminum, 6 ft (1.8 m), with acetal bung adapter for 55 gal (200 l) drum 245085 Stainless Steel, 6 ft (1.8 m), with acetal bung adapter for 55 gal (200 l) drum

Use in HVLP applications and where required fluid pressure to spray gun

is less than 20 psi (1.4 bar, 0.14 MPa).

241976 Fluid Regulator, Acetal, 0-60 psi (0-4 bar, 0-0.4 MPa) 236450 Fluid Regulator, Acetal, 20-100 psi (1.4-7 bar, 0.14-0.7 MPa) 214706 Fluid Regulator, Stainless Steel, 5-100 psi (0.3-7 bar, 0.03-0.7 MPa)

#### **Pump Outlet Fluid Filters**

Filters attach to the outlet of the Triton pump.

114361 Fluid Filter, Nylon, 80 mesh, 3/8 npt(fbe), 150 psi (10 bar, 1 MPa)

Fluid Filter, Stainless Steel, 60 mesh (250 micron), 3/8 npt(f) inlet x 1/4 npt(m)

outlet, 5000 psi (350 bar, 35 MPa)

#### **Agitators**

Electrostatic

SST Pail Agitator for Triton Packages 245081 243340 SST Pail Cover with Agitator

### **Technical Specifications**

Maximum fluid working pressure	
Pump displacement	5 oz/cycle (160 cc/cycle)
Air inlet fitting	1/4 npt(f)
Acetal fluid regulator outlet fitting	3/8 npt(m)
Stainless steel fluid regulator outlet fitting	3/8 npsm(m)
Pump inlet	3/4 npt(f)
Pump outlet	3/8 npt(f)
Fluid outlet fitting	3/8 npt(m)

#### **Average Air Consumption** Conventional

	Gun:	14.0 sctm	Gun:	12.0 sctm	Gun:	15.0 sctm	Gun:	20.0 sctm	
	Pump:	1.5 scfm							
	Total:	15.5 scfm	Total:	13.5 scfm	Total:	16.5 scfm	Total:	21.5 scfm	
Sound data*									
Sound pressure level at 40 psi (0.28 MPa, 2.8 bar)									
Sound power level at 40 psi (0.28 MPa, 2.8 bar)									
*Sound pressure measured one meter from unit. Sound power measured per ISO standard 3744. Sound data is for Triton pump only, without spray gun. Refer to the spray gun instruction manual for gun sound data.									

HVLP

Compliant

Weight	
5 gal (18.9 l) pail package (Alum/SST)	22 lb (10 kg)/28 lb (12.7 kg)
Stand package (Alum/SST)	20 lb (9.1 kg)/27 lb (12.3 kg)
Cart package (Alum/SST)	30 lb (13.6 kg)/36 lb (16.4 kg)
Wall mount package (Alum/SST)	19 lb (8.6 kg)/24 lb (10.9 kg)
Pump instruction and part manual	309303
Spray package instruction and parts manual	309304
Spray package operation manual	
Agitator kit instruction manual	309306



#### **ABOUT GRACO**

#### PROVEN QUALITY, LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

#### **GRACO LOCATIONS**

#### MAILING ADDRESS

Fax: 612-623-6777

P.O. Box 1441 Minneapolis, MN 55440-1441 Tel: 612-623-6000

### **AMERICAS**

### MINNESOTA

Worldwide Headquarters Graco Inc. 88-11th Avenue N.E. Minneapolis, MN 55413

#### **EUROPE**

#### **BELGIUM**

European Headquarters
Graco N.V.
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium

Tel: 32 89 770 700 Fax: 32 89 770 777

#### **ASIA PACIFIC**

#### **AUSTRALIA**

Graco Australia Pty Ltd Suite 17, 2 Enterprise Drive Bundoora Victoria 3083 Australia Tel: 61 3 9468 8500 Fax: 61 3 9468 8599

#### **CHINA**

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7
1029 Zhongshan Road South
Huangpu District
Shanghai, 200011
The People's Republic of China
Tel: 86 21 649 50088

Fax: 86 21 649 50077

#### INDIA

Graco Hong Kong Ltd. India Liaison Office Room 443, Augusta Point Regus Business Centre 53 Golf Course Road Gurgaon, Haryana India 122001 Tel: 91 124 435 4208 Fax: 91 124 435 4001

#### JAPAN

Graco K.K. 1-27-12 Hayabuchi Tsuzuki-ku Yokohama City, Japan 2240025 Tel: 81 45 593 7300 Fax: 81 45 593 7301

#### **KOREA**

Graco Korea Inc.
Shinhan Bank Building
4th Floor #1599
Gwanyang-Dong, Dongan-Ku,
Anyang-Si, Korea 431-060
Tel: 82 31 476 9400
Fax: 82 31 476 9801

### SALES/ DISTRIBUTION/ SERVICE

Call today for product information or to request a demonstration.

877.84GRACO (1-877-844-7226) or visit us at www.graco.com.

Graco Inc. is registered to I.S. EN ISO 9001

North America Industrial Customer Service 800.328.0211 Fax 877.340.6427