

Storage/Start-Up Tool for All Hand-Held Airless Sprayers

3A2154B

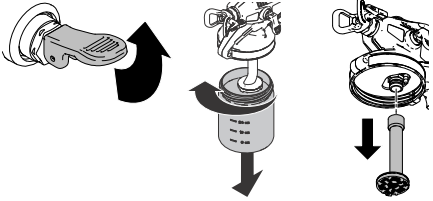
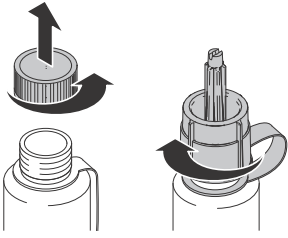
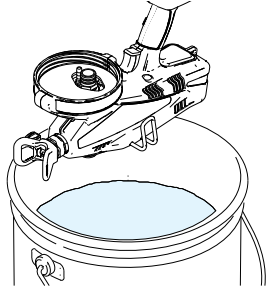
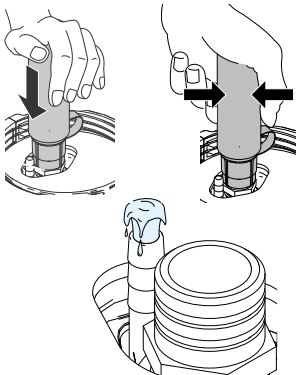
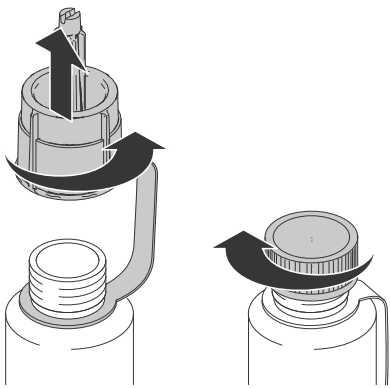
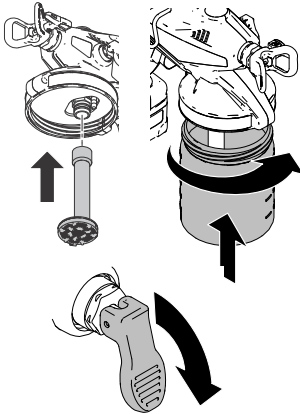
EN



NOTE: Follow the **Shutdown and Cleaning** procedure described in your sprayer manual before performing the steps below.

NOTE: The Pump Armor bottle can be filled with flushing fluid for cleaning.

Perform the steps below before storing the sprayer or starting a new job.

<p>1. Lift valve UP to the prime position. Remove material cup and suction tube.</p> 	<p>2. Remove child-proof cap. Thread nozzle onto Pump Armor bottle. NOTE: For best results, make sure bottle is full.</p> 	<p>3. Hold sprayer upside-down over a waste container.</p> 
<p>4. Insert Pump Armor nozzle over material inlet and push firmly until it stops. Squeeze cleaning bottle until Pump Armor flows out drain tube.</p> 	<p>5. Remove Pump Armor nozzle and replace child-proof cap for storage.</p> 	<p>6. Attach suction tube and material cup. Push valve DOWN to spray position.</p> 

If sprayer fails to start after performing steps 1-6, perform the steps below.

<p>7. Repeat Step 4 by squeezing a full Pump Armor bottle quickly and firmly to flush fluid (approximately half of the bottle) through drain tube.</p>	<p>8. If Step 7 fails, perform Alternate Priming Method (see sprayer manual).</p>	<p>9. If Steps 7 and 8 fail, see Troubleshooting section of sprayer manual or call Graco Technical Support.</p>
--	--	--

WARNING

Always disconnect power from sprayer and perform **Pressure Relief Procedure** as described in your sprayer manual before performing any maintenance. See sprayer manual for complete Warnings and other safety procedures.



*All written and visual data contained in this document reflects the latest product information available at the time of publication.
Graco reserves the right to make changes at any time without notice.*

For patent information, see www.graco.com/patents.

Original instructions. This manual contains English. MM 3A2154

Graco Headquarters: Minneapolis

International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA

Copyright 2011, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com

Revision B - July 2013

Storage/Start-Up Tool for All Hand-Held Airless Sprayers

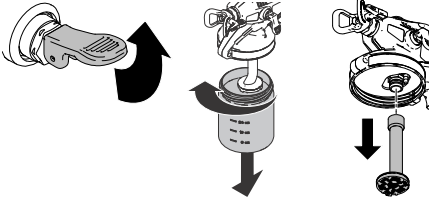
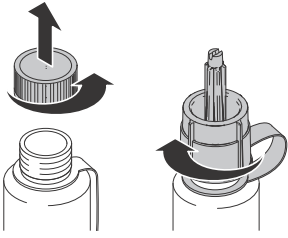
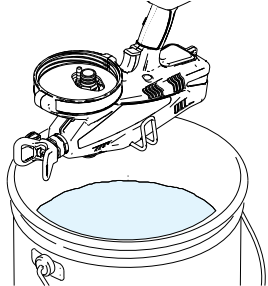
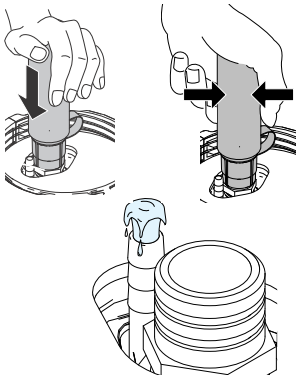
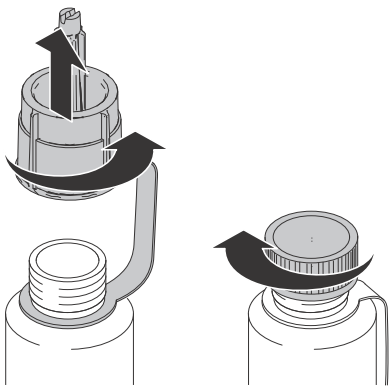
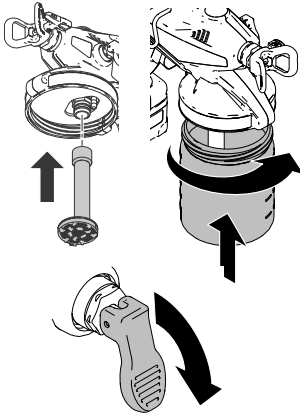
3A2154B
EN



NOTE: Follow the **Shutdown and Cleaning** procedure described in your sprayer manual before performing the steps below.

NOTE: The Pump Armor bottle can be filled with flushing fluid for cleaning.

Perform the steps below before storing the sprayer or starting a new job.

<p>1. Lift valve UP to the prime position. Remove material cup and suction tube.</p> 	<p>2. Remove child-proof cap. Thread nozzle onto Pump Armor bottle. NOTE: For best results, make sure bottle is full.</p> 	<p>3. Hold sprayer upside-down over a waste container.</p> 
<p>4. Insert Pump Armor nozzle over material inlet and push firmly until it stops. Squeeze cleaning bottle until Pump Armor flows out drain tube.</p> 	<p>5. Remove Pump Armor nozzle and replace child-proof cap for storage.</p> 	<p>6. Attach suction tube and material cup. Push valve DOWN to spray position.</p> 

If sprayer fails to start after performing steps 1-6, perform the steps below.

<p>7. Repeat Step 4 by squeezing a full Pump Armor bottle quickly and firmly to flush fluid (approximately half of the bottle) through drain tube.</p>	<p>8. If Step 7 fails, perform Alternate Priming Method (see sprayer manual).</p>	<p>9. If Steps 7 and 8 fail, see Troubleshooting section of sprayer manual or call Graco Technical Support.</p>
--	--	--

⚠️ WARNING

Always disconnect power from sprayer and perform **Pressure Relief Procedure** as described in your sprayer manual before performing any maintenance. See sprayer manual for complete Warnings and other safety procedures.



*All written and visual data contained in this document reflects the latest product information available at the time of publication.
Graco reserves the right to make changes at any time without notice.*

For patent information, see www.graco.com/patents.

Original instructions. This manual contains English. MM 3A2154

Graco Headquarters: Minneapolis

International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA

Copyright 2011, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com

Revision B - July 2013