




SOLUTIONS FOR EV BATTERY ASSEMBLY

Bonding | Sealing | Coating | Thermal Management

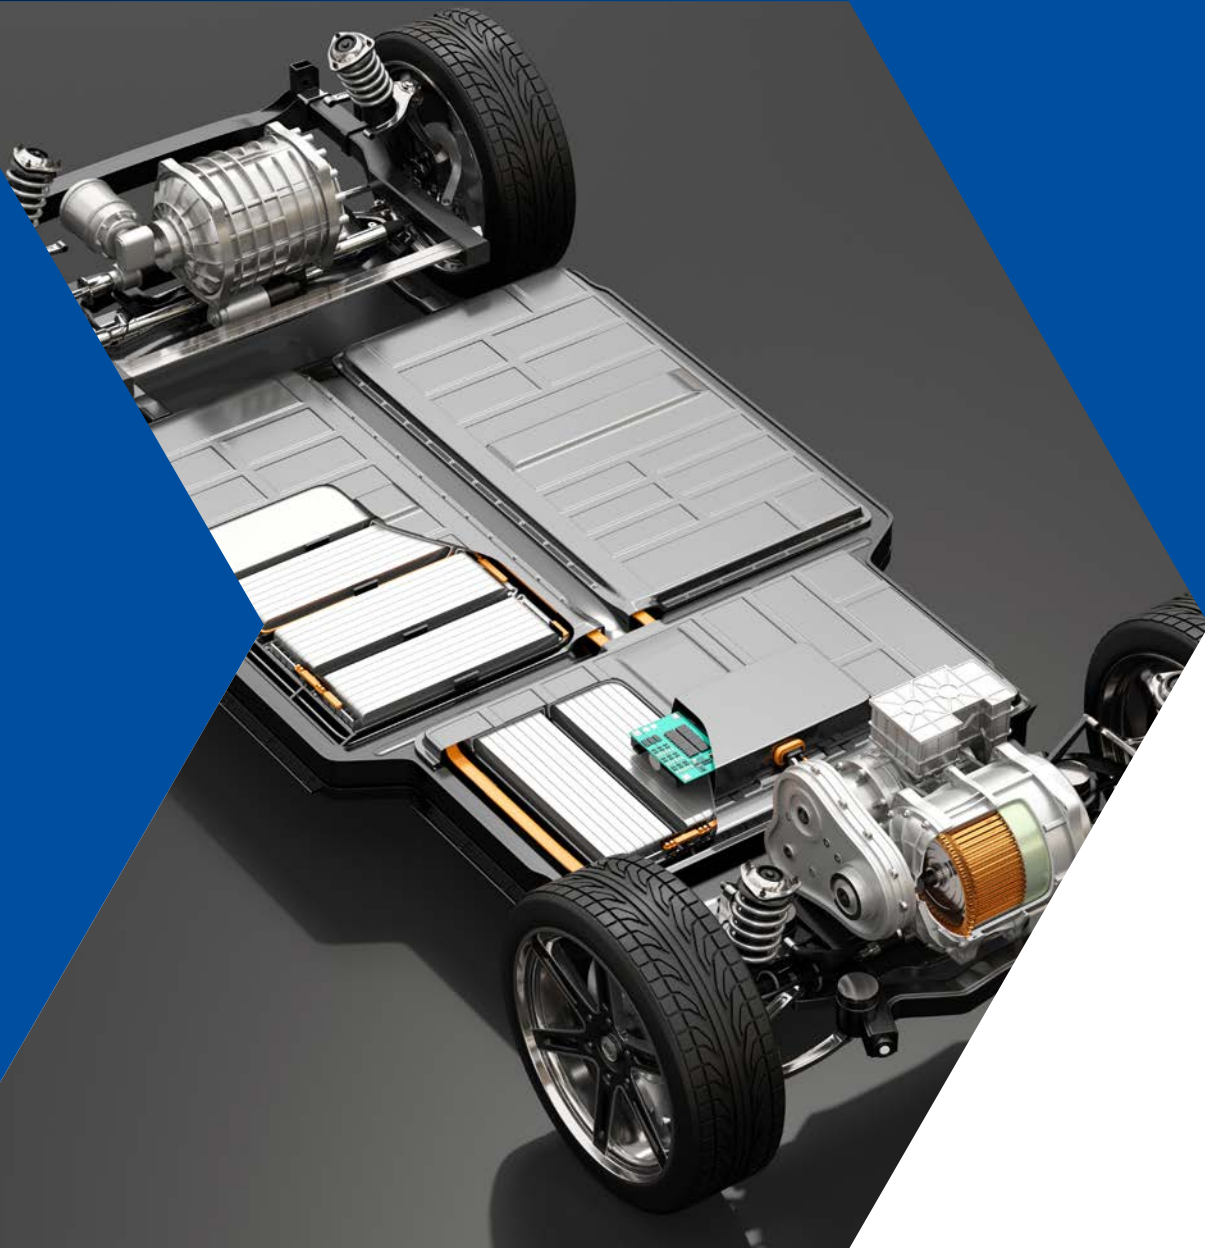


PROVEN QUALITY. LEADING TECHNOLOGY.

A Strong Bond with eMobility

The world of transportation is changing rapidly. Electrification represents the largest change in transportation since the invention of the internal combustion engine.

At the heart of electrification is the lithium-ion battery. Ongoing advancements in energy density, safety, and cost to produce are driving mass electrification of transportation. Adhesives, sealants, coatings and thermal interface materials (TIMs) are all important components of electrification and are enabling exciting design breakthroughs. These applications require robust dispensing solutions.

As you scale from prototype to mass manufacturing you need a partner you can count on. Graco is a leader in automotive and battery dispensing equipment. Our experts have vast experience in some of the most challenging applications. Count on us to get it right the first time.

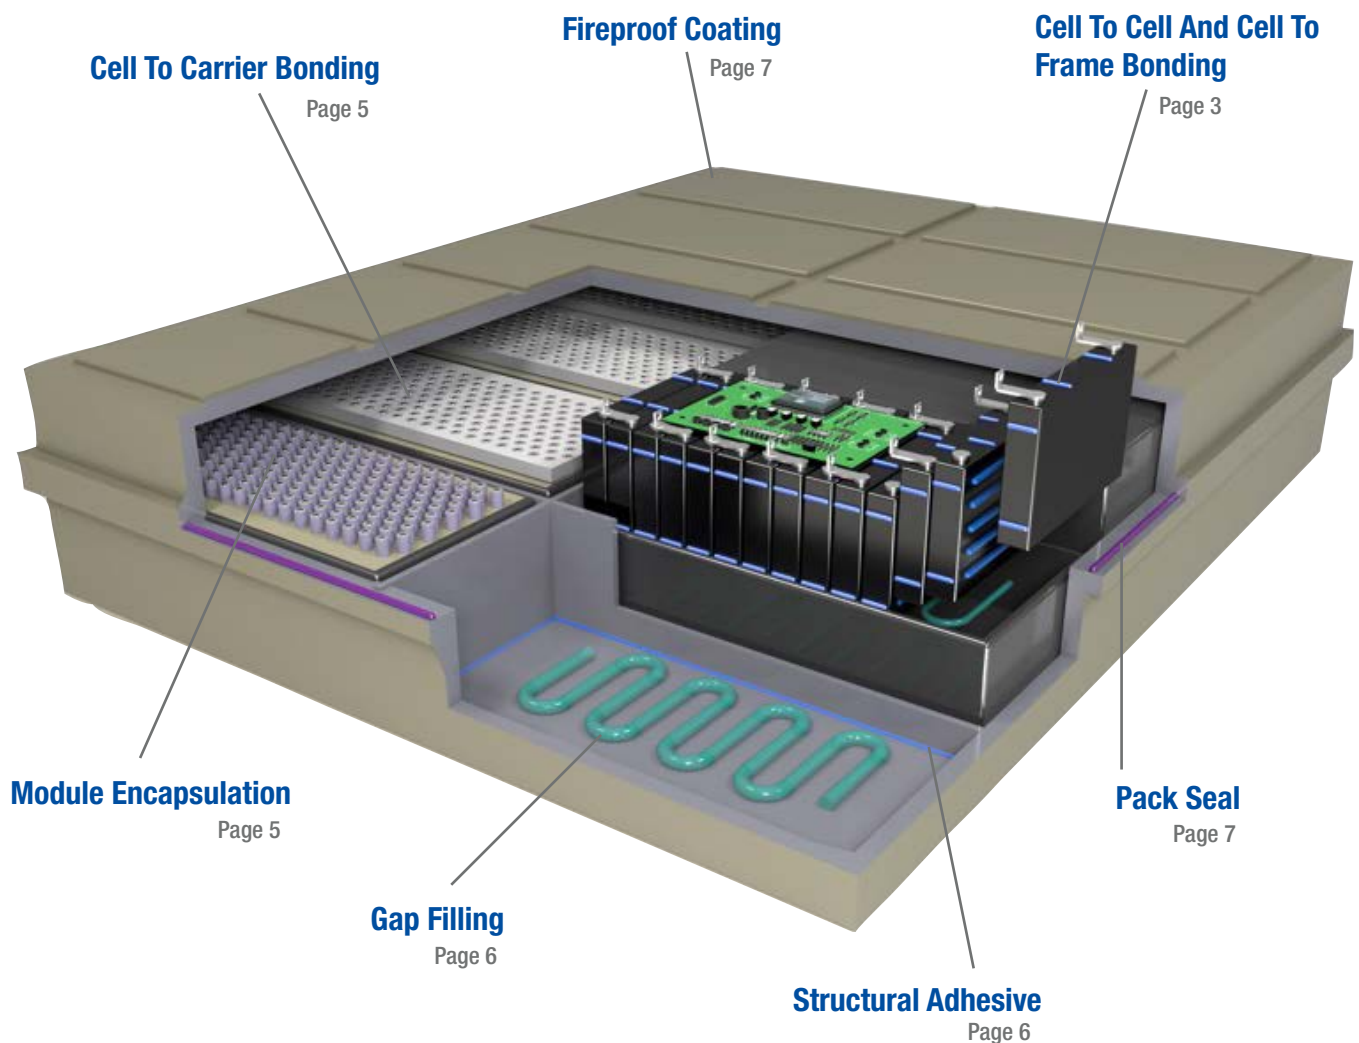


Module Assembly Applications

The module assembly process depends on the cell format and the individual manufacturer designs. While pouch, prismatic, and cylindrical cell modules all have their unique design challenges, different sealing, bonding or TIMs applications are used to provide strength, protection and efficient heat dissipation.

CELL TO CELL BONDING

Inside prismatic or pouch module designs, cells are firmly bonded to each other to create cells stacks and to provide insulation and protection against vibration or movement.

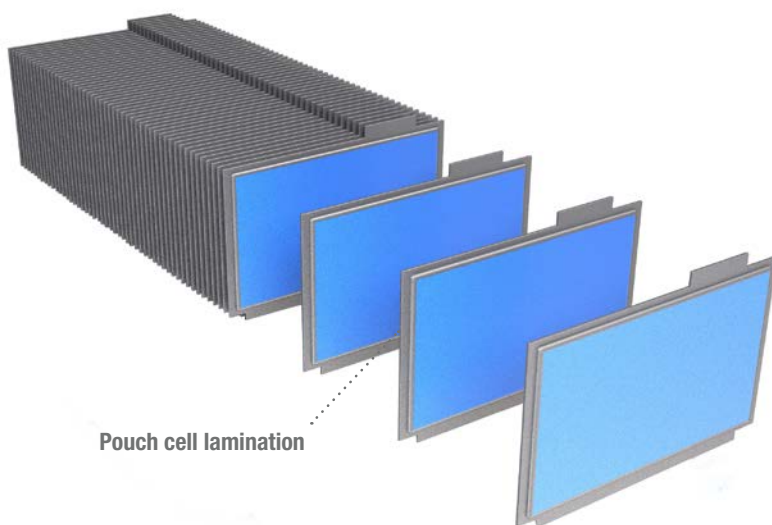

Pouch Cell Lamination

Hot melt pressure sensitive adhesives are commonly used in pouch cell lamination to bond layers together. In cases where thermal conductivity is required, a silicone or polyurethane material may be used. These applications often require a precise spray or swirl pattern.


GRACO SOLUTIONS

Supply Pump: Therm-O-Flow (heated)

One-Component Metering: PCF

Two-Component Systems: PR70, EFR, HFR

Valves: PrecisionSwirl

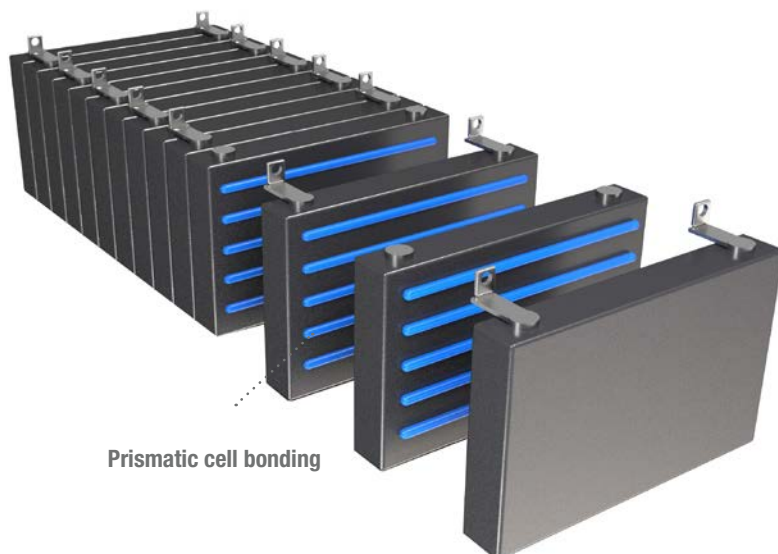

Prismatic Cell Bonding

Prismatic cells are bonded with two-component urethanes or silicones which need to be light and flexible to allow the cells to expand during charging and discharging. To provide complete insulation and avoid short circuits, the application needs to be precise to avoid air gaps during the dispense.

GRACO SOLUTIONS


Supply Pump: Check-Mate, E-Flo SP

Two-Component Systems: PR70, PR-X, PD44

Valves: MD2

CELL TO FRAME BONDING

In many cases, modules are enclosed in a lightweight polycarbonate or acrylonitrile butadiene styrene (ABS) enclosure that is sealed closed.

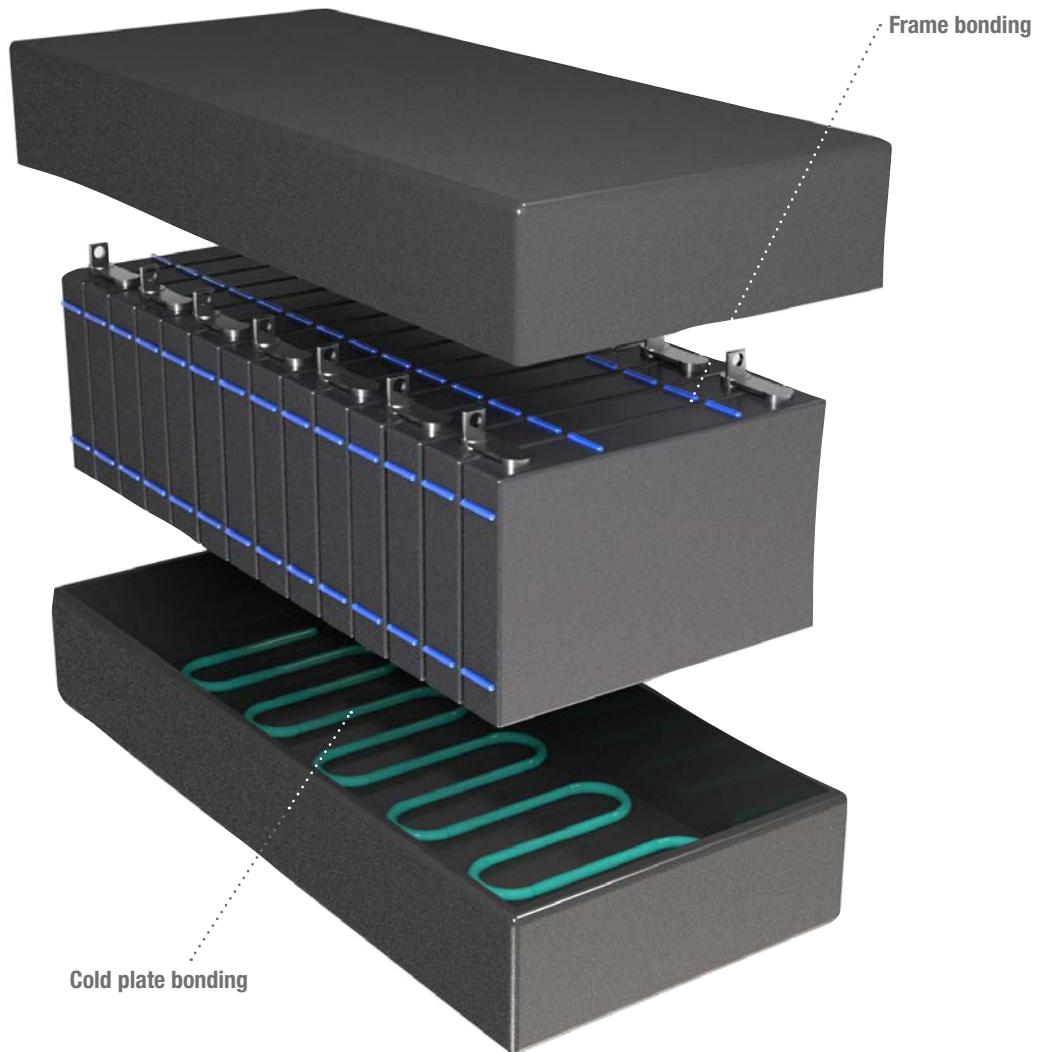

Frame Bonding

Cells are bonded with the frames around them to protect against outside contaminants. The sealing surfaces are generally very small and require precise bead dispensing.

GRACO SOLUTIONS

Supply Pump: Check-Mate, E-Flo SP

One-Component Metering: PCF, Dispensit

Two-Component Systems: PR70, EFR, HFR

Valves: MD2, iQ Dispense Valve

Cold Plate Bonding


Cold plate bonding involves bonding cells or other electronic devices to a cooling plate. This generally involves a structural bond that provides good thermal conductivity and dielectric strength. These materials are often abrasive and require the right dispensing solution. Two-component meter mix with precision control is of critical importance in these applications.

GRACO SOLUTIONS

Supply Pump: Check-Mate, E-Flo SP

Two-Component Systems: PR70, EFR, HFR

Valves: MD2, MDX

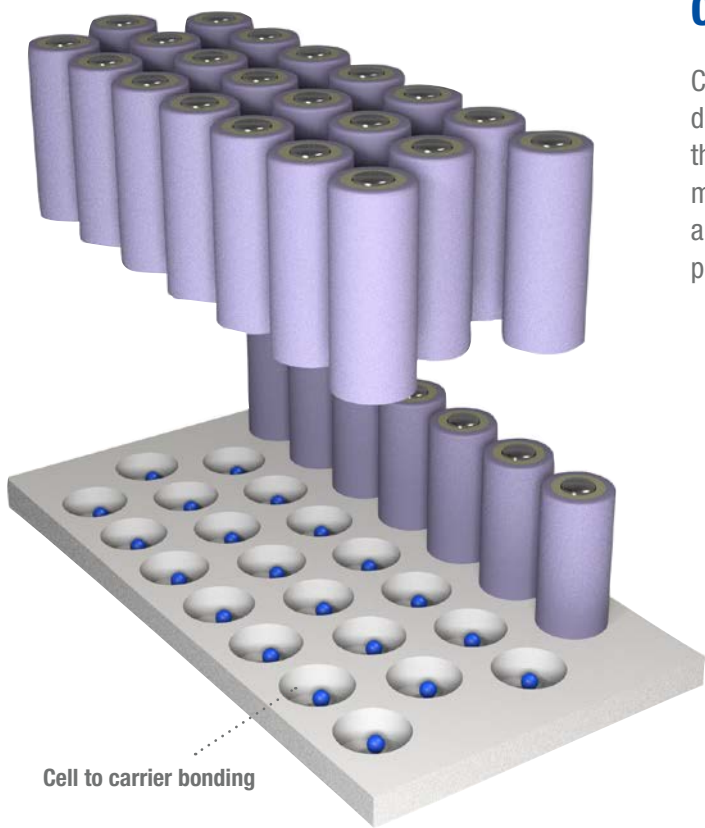

CELL TO CARRIER BONDING

Cylindrical cells are often bonded to a polycarbonate carrier during module assembly. This holds the cells stationary through the tab welding process and provides structural integrity to the module. A variety of adhesive chemistries can be used in this application including UV and two-component acrylics. Rapid precision dispensing is critical to this application.

GRACO SOLUTIONS

Supply Pump: Check-Mate, E-Flo SP


One-Component Metering: Dispensit

Two-Component Systems: PD44, PR-X, EFR, PR70

Valves: Advanjet

MODULE ENCAPSULATION

Module encapsulation, often used in cylindrical cell modules, provides for increased shock and vibration performance and is used to help prevent thermal runaway or propagation events within the modules. These materials are generally two-component polyurethanes, silicones or epoxies that have a foaming reaction to create a lightweight buffer between the cells. This challenging application requires the right equipment and expertise as ratio, flow and mixing energy are all critical variables.

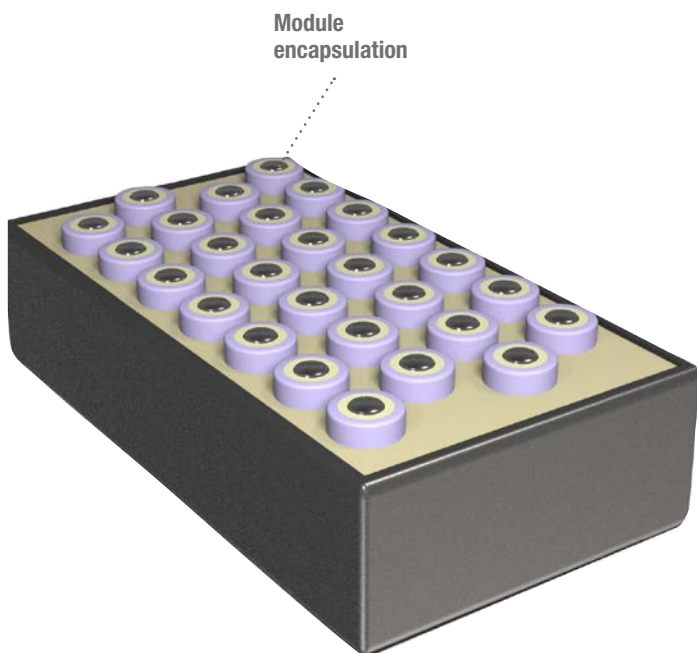

GRACO SOLUTIONS


Supply Pump: Check-Mate, E-Flo SP

Two-Component Systems: PR70, EFR

Valves: Voltex, MD2

Pack Assembly Applications

The assembly of battery packs includes applications to bond, fill, seal and coat. All of these applications contribute to guarantee strength, lightweight, proper heat management and protection against vibrations, shocks, water intrusion and outside contaminants.

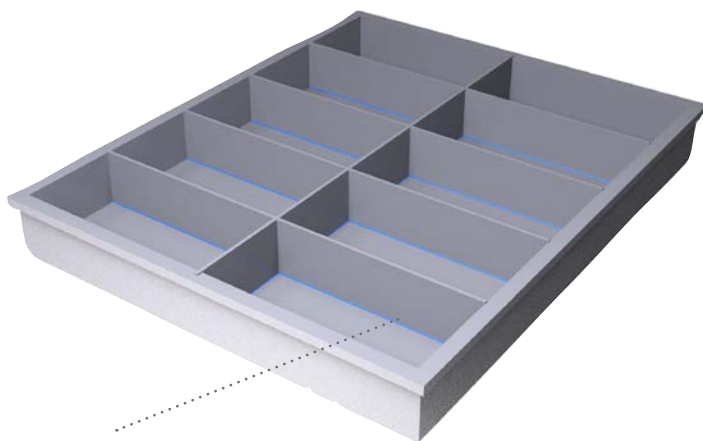

Structural bonding

STRUCTURAL BONDING

Structural bonding with one-component or two-component epoxies is done to bond aluminum or other materials within a battery pack. This not only contributes to the lightweight design but also offers extra strength and rigidity to the battery pack, which helps its crash-durability over the lifetime of the battery. Given the important nature of this application, the right equipment is a must.


GRACO SOLUTIONS

Supply Pump: Check-Mate, E-Flo SP

One-Component Metering: PCF, E-Flo iQ

Two-Component Systems: PR70, EFR, HFR

Valves: MD2, MDX, iQ Dispense Valve

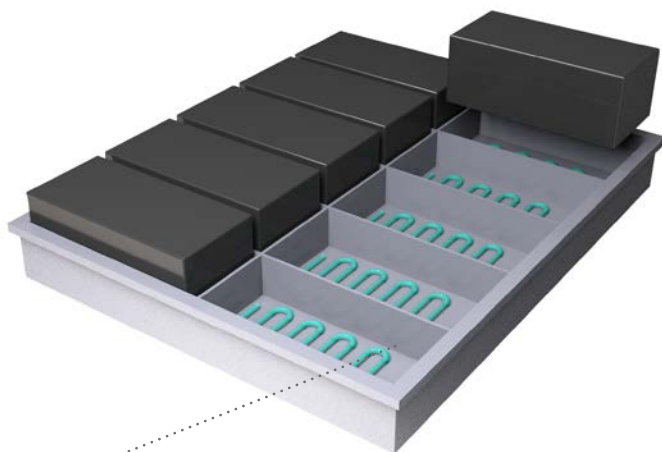

Gap filling

GAP FILLING


The performance of the battery is highly dependent on good thermal management. Thermal interface materials or gap fillers provide perfect thermal dissipation from the heated modules to the cooling circuits on the battery pack. These one and two-component gap fillers are generally non-structural but are very viscous with highly abrasive fillers which contain ideal heat conducting characteristics. The application often requires high flow dispensing with robust pumping, precise metering and dispensing, where air gaps must be avoided for an optimal heat transfer. This application has many challenges and requires the right equipment that is made of abrasive resistant components to correctly handle these gap filler materials.

GRACO SOLUTIONS

Supply Pump: Check-Mate, E-Flo SP

Two-Component Systems: PR-X, EFR, HFR

Valves: MD2, MDX

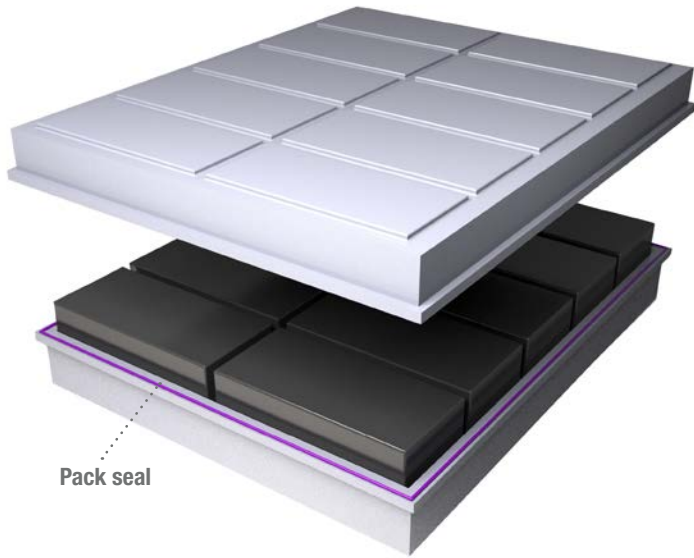

Pack seal

PACK SEAL

The pack seal is critical to the longevity and safety of a battery pack. The seals are often designed to an IP68 standard, which means that the seal will protect against water intrusions as well as outside contaminants. A variety of sealants can be used and fall into two categories – cure in place gaskets (CIPG) and form in place gaskets (FIPG). CIPG gaskets are dispensed and allowed to cure before assembly, creating a compression gasket in the pack seal joint. Alternatively, an FIPG gasket is dispensed, assembled immediately, and allowed to cure over time. In either case, precise and repeatable dispensing equipment is required for this critical seal.


GRACO SOLUTIONS

Supply Pump: Check-Mate, E-Flo SP

One-Component Metering: PCF, E-Flo iQ, PCP, Therm-O-Flow

Two-Component Systems: EFR

Valves: Voltex, EnDure, iQ Dispense Valve

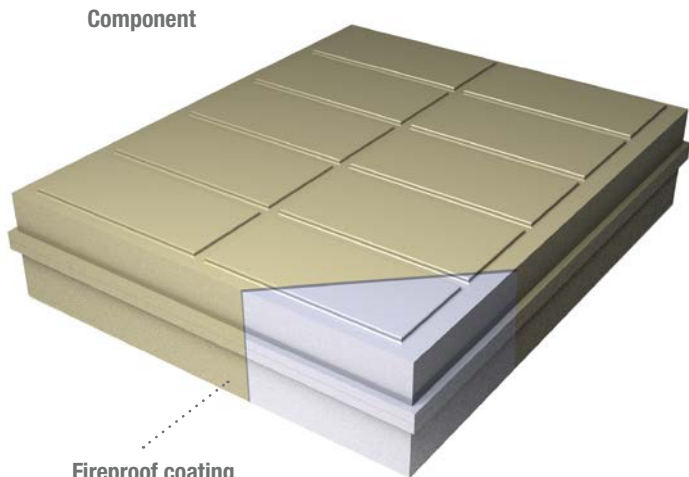

Component

Fireproof coating

FIREPROOF COATING

The cover of the battery pack can be sprayed with a fireproof coating that not only protects against fire but also protects against corrosion. As the coating is applied, its thickness must be consistent over the complete cover with as little overspray as possible. It is therefore important to use equipment that can keep a constant and accurate spray pattern without overspray.

GRACO SOLUTIONS

Two-Component Systems: Protector

Our Equipment and Expertise

A global leader in fluid handling equipment, Graco brings high quality solutions to many industries, including automotive and battery. With years of experience, we offer tailor made solutions that help you pump, meter, mix or dispense a wide range of adhesives, even highly abrasive thermal interface materials (TIMs).

Whether your process requires miniscule drop dispensing or large volume continuous flows, Graco has got you covered.

ONE-COMPONENT SUPPLY PUMPS

Pneumatic Driven

Ambient



Dynamite

For 300 cc cartridges – 1 gallon pails



Check-Mate

For 20 liter to 200 liter pails

Heated up to 400°F



Therm-O-Flow

For 20 liter to 200 liter pails

Electric Driven



E-Flo SP

For 20 liter to 200 liter pails

Graco pumps and valves with Elite construction withstand the most abrasive epoxies, silicones, thermal interface materials (TIMs), and urethanes. With wear-resistant seals and surfaces, Elite can dispense at least 10 times more abrasive material than comparable equipment.



ONE-COMPONENT METERING SYSTEMS



Dispensit

Shot sizes from 0.001 cc to 52 cc



E-Flo iQ*

Continuous flow 10cc/
min-4500 cc/min



Precision Continuous Flow (PCF)

Shot sizes down to 1cc or continuous flow from 6 cc to 22500 cc/min



Progressive Cavity Pump*

Continuous flow up to 87 cc/min

TWO-COMPONENT METER, MIX & DISPENSE SYSTEMS*



PD44*

Shot sizes from 0.005 cc to 5 cc



PR-X*

For beads or dots from 0.03 cc to 50 cc



PR70

Shot sizes from 0.005 cc to 5 cc



EFR* (electric driven)

Shots from 0.3 cc to any size or continuous flow up to 3200 cc/min at 207 bar



HFR*

Shot sizes above 30 cc or continuous flow up to 19000 cc/min

*Systems are available in different constructions to handle a wide range of adhesives, including high filled, high abrasive adhesives

DISPENSE VALVES

ONE-COMPONENT VALVES



Advanjet Jet Valve

Multitude of beads and dots for micro-dispense applications requiring 10nl drops and up.

For low to high viscosities



PrecisionSwirl

Continuous flow valve for open or closed, wide or narrow pattern beads

For low to medium viscosities



iQ Dispense Valve

Continuous flow valve for bead and dot dispense applications

For medium to high viscosities



EnDure

Continuous flow valve for bead and dot dispense applications

For low to high viscosities

TWO-COMPONENT VALVES



Voltex

Dynamic mix valve for bead and potting applications of foams

For low viscosities



MD2

Dispense valve for a multitude of bead, dot and potting applications of 2.0 cc's and up

For low to high viscosities



MDX

Continuous flow valve for bead, dot and potting applications

For low to high viscosities

Graco Has Got You Covered

WORLDWIDE RESEARCH, DEVELOPMENT, AND CUSTOMER SUPPORT

For years Graco has been an expert in fluid handling equipment. With customer and innovation centres worldwide, we have been at the forefront of the research & development of various application solutions in industries like eMobility.

SOLUTIONS & APPLICATION TIPS

Our expertise in core dispense technologies, including supply pumps, metering systems, and dispense valves, helping improve operational efficiency, product quality, and material application for our customers.

As we develop new products, we pay close attention to the quality and longevity of components, focusing on material application and compatibility and its impact on the product life cycle. Our commitment is to meet today's challenges and develop new solutions that will keep our customers at the forefront.

Whether you are looking to tackle application challenges or need help optimising your battery assembly processes, our team of engineers and application specialists will work together with you and material suppliers to find the right solution for your application.

INNOVATION CENTER LOCATIONS



GRACO - NORTH CANTON
8400 Port Jackson Avenue NW
North Canton, OH 44720
U.S.A.



GRACO GERMANY - AACHEN
Nerscheider Weg 170
52076 Aachen,
Germany



GRACO CHINA - DONGGUAN
Building 4
No.14 Industrial South Road
Songshan Lake High-tech Industrial
Development Zone
Dongguan, Guangdong 523808



www.graco.com/evbattery



OUR PROMISE TO YOU

Since 1926, **innovation**, **quality** and **A+ service** have been at the centre of Graco.

Experience innovation

Our focus on innovation results in products and equipment that lead the industry with technologically-advanced features, pioneering design, high performance and unparalleled reliability. In short, innovation is how you get better products!

Building quality

You are investing in high-quality products built to last for years of reliable service. Moreover, we partner with our customers to better understand how you're deploying our products in the field, then use your experiences to improve performance and durability.



A+ service, every time

You'll see A+ Service in action when you contact any of our support services options no matter where you are in the world. We'll listen to your situation and work methodically to resolve it as quickly as we can. We are guided by a mindset of integrity and a customer service view centred on collaboration and relationships, not transactions.



We are here to answer questions and help address your needs.

www.graco.com/contact

Graco is ISO 9001 certified.

©2022 Graco Distribution BV 350407ENEU-C 10/23 Printed in Europe.

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

All other brand names or marks are used for identification purposes and are trademarks of their respective owners. For more information on Graco's intellectual property, see www.graco.com/patent or www.graco.com/trademarks.