



AutoPlus™ Valve

Airless Sealant and Adhesive Valve for Streaming, Spray and Extrusion



Less maintenance and more system uptime!

- Durable stainless steel construction, longer life needle and seat construction specifically designed to handle the toughest sealant and adhesive materials
- Lightweight and compact rounded gun design
- Capable of handling high production speeds
- Fewer parts mean an overall low cost of repair
- Wide range of tips for a variety of applications
- Capable of handling multiple nozzle sizes for any application

PROVEN QUALITY. LEADING TECHNOLOGY.



Simply a Workhorse

Ordering Information

Airless Spray Gun

288554 Auto Plus Gun

Manifolds (required for gun installation)

241161 Standard 1/4 in npsm inlets

244930 High flow ambient or temperature conditioned manifold

Accessories

288171 Air Seal Repair Kit

239896 Fluid Seal Repair Kit

210500 In-Line Fluid Filter


288553 Upgrade Kit, *upgrades existing AP guns to the new design!*

Sealer Application Tip Selection Charts

For Model 288554 with Tip Nut 198391

Streaming Tips		
Part No.	Orifice Size inches (mm)	No. of Orifices
C08224	0.021 (0.533)	6
Shower Tip		
Part No.	Orifice Size inches (mm)	
270025	0.025 (0.635)	
270027	0.027 (0.686)	
270029	0.029 (0.737)	
270031	0.031 (0.787)	
270035	0.035 (0.889)	
270037	0.037 (0.940)	
270039	0.039 (0.991)	
270041	0.041 (1.041)	
270043	0.043 (1.092)	
270059	0.059 (1.500)	
Single Orifice Fan Pattern Spray Tips		
Part No.	Orifice Size inches (mm)	Fan Width at 12in (300mm) inches (mm)
182421	0.021 (0.533)	8-10 (200-250)
182521		10-12 (250-300)
182621		12-14 (300-350)
182721		14-16 (350-400)
182821		16-18 (400-450)
182423	0.023 (0.584)	8-10 (200-250)
182523		10-12 (250-300)
182623		12-14 (300-350)
182723		14-16 (350-400)
182823		16-18 (400-450)
182425	0.025 (0.635)	8-10 (200-250)
182525		10-12 (250-300)
182625		12-14 (300-350)
182725		14-16 (350-400)
182825		16-18 (400-450)
182427	0.027 (0.686)	8-10 (200-250)
182627		12-14 (300-350)
182429	0.029 (0.737)	8-10 (200-250)
182629		12-14 (300-350)
182729		16-18 (400-450)
182431	0.031 (0.787)	8-10 (200-250)
182631		12-14 (300-350)
182831		16-18 (400-450)
182435	0.035 (0.889)	8-10 (200-250)
182535		10-12 (250-300)
182635		12-14 (300-350)
182439	0.039 (0.991)	8-10 (200-250)
182539		10-12 (250-300)
182639		12-14 (300-350)
182443	0.043 (1.092)	8-10 (200-250)
182543		10-12 (250-300)
182643		12-14 (300-350)
182943		18-20 (450-500)
182947	0.047 (1.194)	18-20 (450-500)

Manifold Mounting Hole Layout

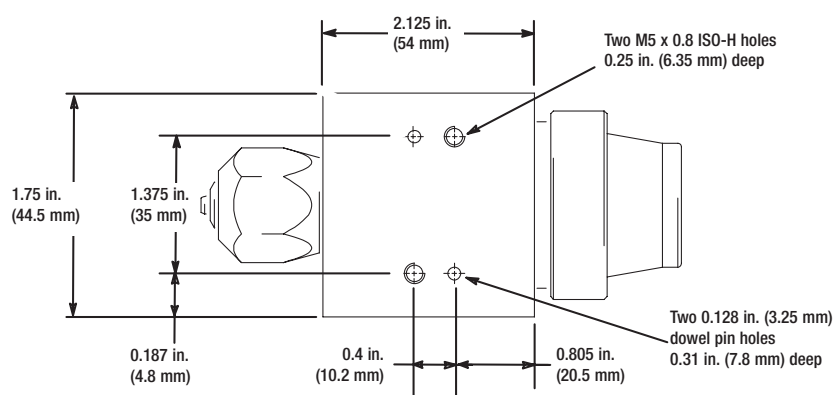

Technical Specifications

	AUTOPLUS GUN
Maximum fluid pressure	4000 psi (276 bar, 27.6 MPa)
Maximum working air pressure	100 psi (7 bar, 0.7 MPa)
Maximum cylinder air pressure	100 psi (7 bar, 0.7 MPa)
Minimum air cylinder actuating pressure	70 psi (4.9 bar, 0.49 MPa)
Maximum working fluid temperature	140°F (60°C)
Triggering speed	50-70 msec (fully open or closed)
Wetted parts	stainless steel, carbide, UHMWPE, acetal, PEEK, Chemically Resistant Fluoroelastomer, PTFE
Gun weight	1.2 lb (895 g)
Dimensions	5.2 in L x 3.0 in H x 2.0 in W (135 mm L x 76 mm H x 51 mm W)
Instruction manual	311053

Contact us today!

To receive product information or to request a hands-on demonstration, call +32(89)770 700 or visit us online at www.graco.be

GRACO N.V. Industrieterrein Oude Bunders • Slakweidestraat 31 • B-3630 Maasmechelen
Tel: +32 (89) 770 700 • Fax: +32 (89) 770 777 • E-mail: info@graco.be • <http://www.graco.be>

©2007 Graco Inc. 338721E Rev. B 7/07 Printed in Europe. All information is subject to change without notice. All other brand names or marks are used for identification purposes and are trademarks of their respective owners.