




Expanding Blade Agitator

Air Driven Expanding Blade Bung-Mounted Agitator

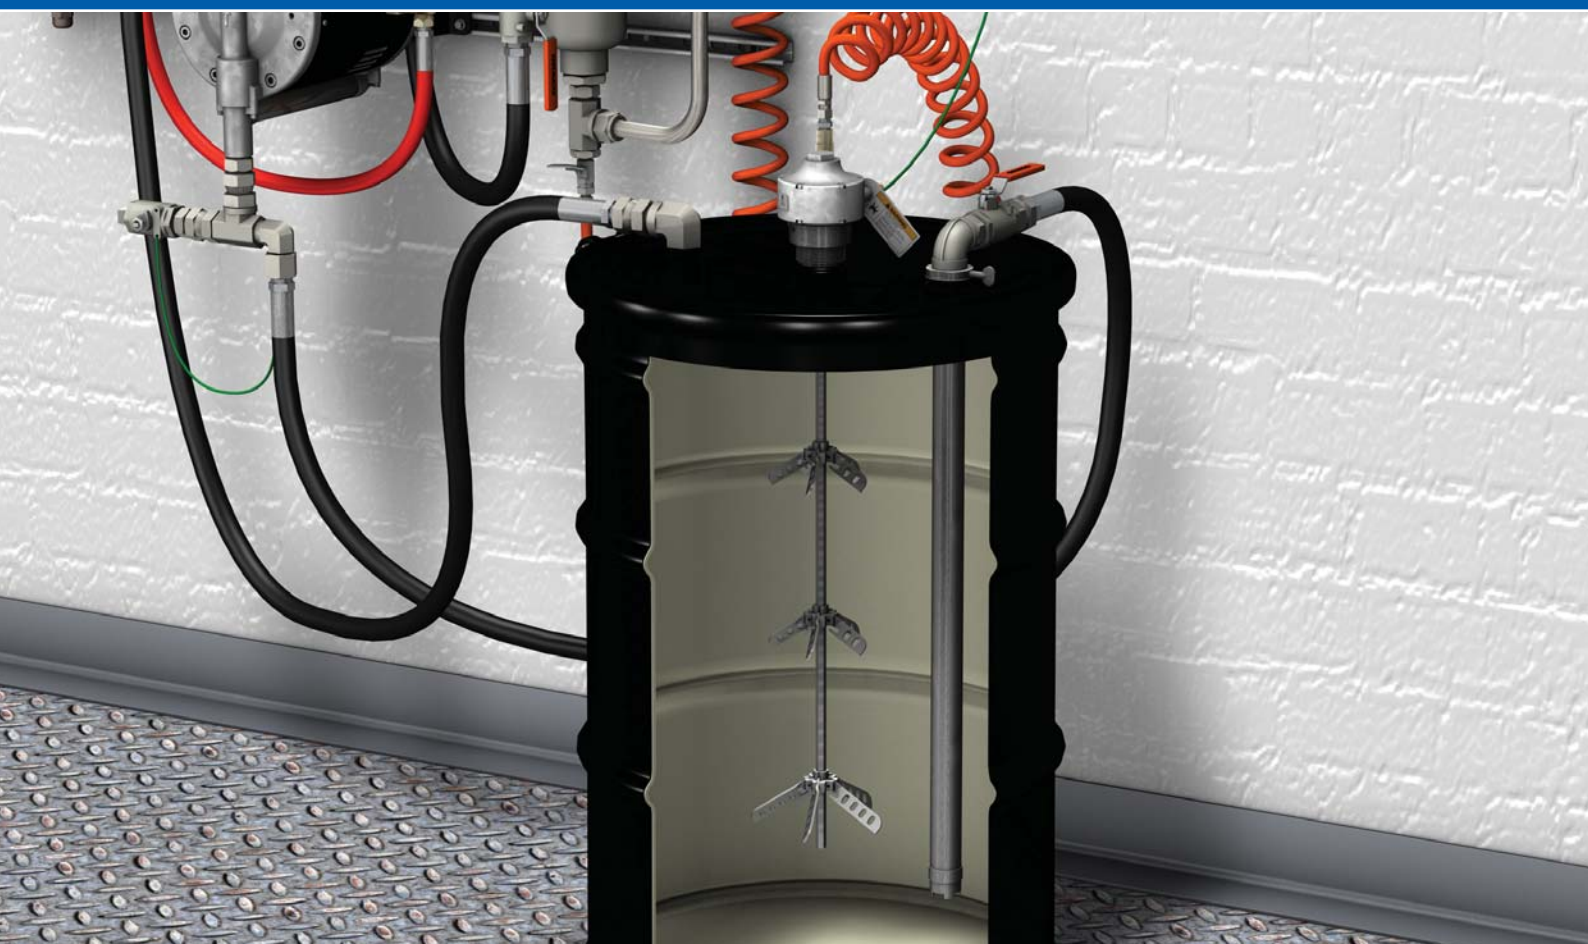

Quick install, expanding blade mixer for sealed drums or tanks

- SST construction
- Standard 1-1/2 and 2 inch bung connections
- Adjustable blade design for positioning within the tank
- Simple screw-in installation

PROVEN QUALITY. LEADING TECHNOLOGY.



Technical Specifications

EXPANDING BLADE AGITATOR

Maximum air input pressure 7 bar (0.7 MPa, 100 psi)

Maximum recommended agitator speed 500 rpm

Air consumption at 400 rpm with 7 bar (0.7 MPa, 100 psi)
air inlet pressure

Model 24C728 (low viscosity) 12 scfm (0.34 m³/min)

Model 24C729 (high viscosity) 22 scfm (0.62 m³/min)

Noise Level at 7 bar (0.7 MPa, 100 psi), maximum load*

Model 24C728 (low viscosity)

Pressure 72.32 dB

Power 80 dB

Model 24C729 (high viscosity)

Pressure 75.74 dB

Power 82.32 dB

Wetted Parts 303, 18-8, and 304 stainless steel

Bung adapter thread sizes 1 1/2-11.5 npsm and 2-11.5 npsm

Weight

Model 24C728 (low viscosity) 4.4 kg (9.6 lb)

Model 24C729 (high viscosity) 5.9 kg (13.1 lb)

Instruction Manual Part No 313643

**Tested in water to ISO 9614-2.*



Target Applications

- Foam
- Polyurea
- General Finishing
- For any sealed container with 1-1/2 inch or 2 inch bung access

Ordering Information

24C728 Low Viscosity, 1 HP up to 1000 cps

24C729 High Viscosity, 1.75 HP up to 2000 cps

GRACO N.V. Industrieterrein Oude Bunders
Slakweidestraat 31 • B-3630 Maasmechelen
Tel: +32 (89) 770 700 • Fax: +32 (89) 770 777
E-mail: info@graco.be • http://www.graco.com

©2010 Graco Inc. Form No. 344830E (rev. A) 08/10 Printed in Europe.
All other brand names or marks are used for identification purposes and are trademarks of their respective owners. All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.