

Replacing the EM5™ Meter Battery

311213A

Follow these steps when the battery icon on the LCD screen blinks continuously or the LCD screen does not activate or displays nonsense characters, indicating a low or dead battery.



These instructions are provided as a quick maintenance guide. They are not meant to replace the EM5 Meter Instruction Manual. See Graco manual 309142 for Warnings and information on the safe and proper operation of this equipment. It is important that you read and understand all instructions and hazards before operating this equipment.



WARNING



FIRE AND EXPLOSION HAZARD

Only replace the battery in a non-hazardous location, away from flammable fluids or fumes.

Before you start

Be sure that you have a small, flat-blade screwdriver and a new 9-volt alkaline battery before you start to replace the battery.



PROVEN QUALITY. LEADING TECHNOLOGY.



- 1.** Pull down enough hose so that the meter can be supported on the floor or other flat work surface.



- 2.** Remove the boot from the meter.



- 3.** Remove the battery cover.




- 4.** Using a small flat-blade screwdriver, carefully pry out the battery. **Do not pull on the wires.**



- 5.** Hold the battery terminal strip and unsnap the battery from the strip. **Do not pull on the wires.**



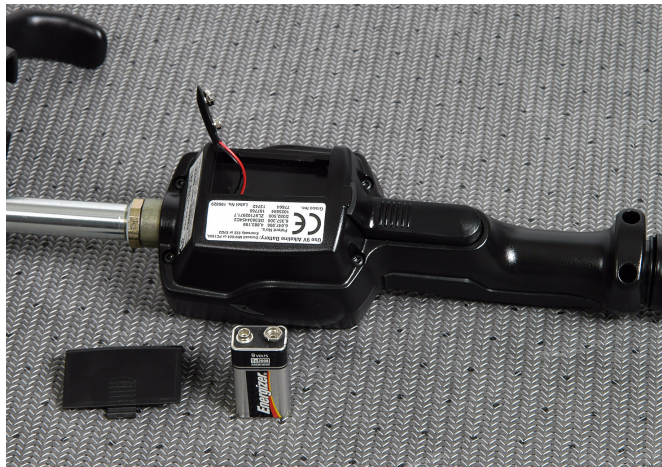

6. Snap a new 9-volt alkaline battery onto the terminal strip.



7. Replace the battery in the meter cover.



8. Replace the battery cover.



9. Replace the boot.



10. Test the meter