

E-Flo[®] SP Supply Systems

3A6331N

EN

For transferring or dispensing sealants, adhesives, or other medium to high viscosity fluids. For professional use only.

Not approved for use in explosive atmospheres or hazardous locations.

D60 3 inch dual post

20 liter (5 gallon), 30 liter (8 gallon),
60 liter (16 gallon) sizes
150 psi (1.0 MPa, 10 bar) Maximum Air Inlet Pressure

D200 3 inch dual post

200 liter (55 gallon) size
150 psi (1.0 MPa, 10 bar) Maximum Air Inlet Pressure

D200S 6.5 inch dual post

200 liter (55 gallon) size
125 psi (0.9 MPa, 9 bar) Maximum Air Inlet Pressure


See page 4 for model information, including maximum working pressure and approvals.

The Graco Control Architecture Electric Components are Listed in Intertek's Directory of Listed Products.



Important Safety Instructions

Read all warnings and instructions in this manual and in related manuals before using the equipment. Save all instructions.

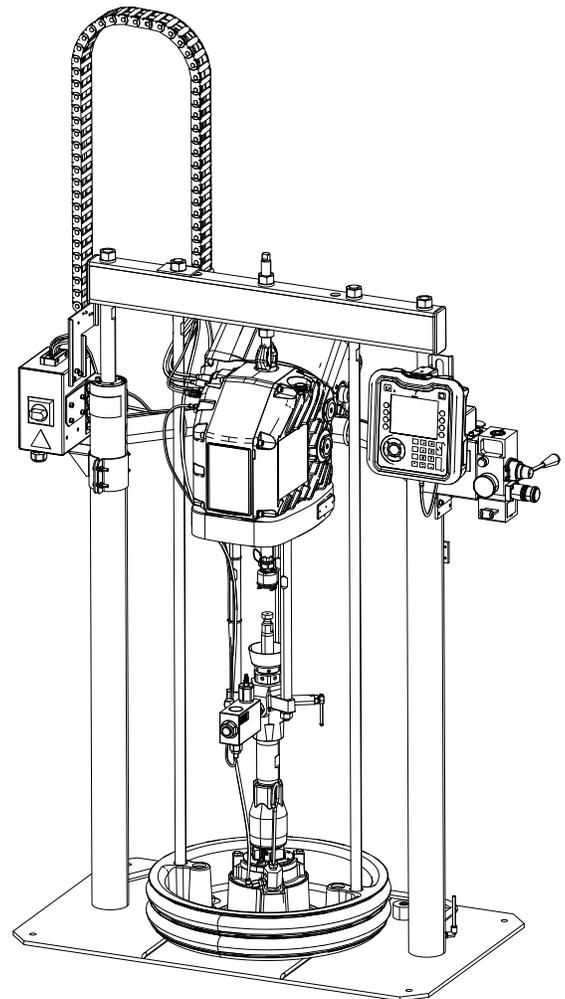

Contents

| | |
|---|-----------|
| Related Manuals | 3 |
| Models | 4 |
| System Pressure | 6 |
| Tandem Ram | 7 |
| Warnings | 8 |
| Component Identification | 11 |
| Typical Installation | 11 |
| Integrated Air Control Module | 12 |
| Integrated Air Line Accessories | 12 |
| Advanced Display Module (ADM) | 13 |
| Platen Component Identification | 14 |
| Junction Box Connections | 15 |
| Installation | 16 |
| Location | 16 |
| Grounding | 16 |
| Power Requirements | 17 |
| Connect Power | 17 |
| Attach Drum Stops | 18 |
| Fluid Hose and Air Line Connections | 18 |
| Install Vented Oil Cap Before Using Equipment | 18 |
| Setup | 19 |
| Wet Cup | 19 |
| Startup | 20 |
| Flush the Pump | 20 |
| Start and Adjust the Ram | 21 |
| Start and Adjust the Pump | 21 |
| Pressure Relief Procedure | 22 |
| Shutdown and Care of the Pump | 23 |
| Change Drums | 23 |
| Maintenance | 24 |
| Driver Maintenance | 24 |
| Platen Maintenance | 25 |
| Troubleshooting | 29 |
| Repair | 30 |
| Disconnect Pump from Platen | 30 |
| Connect Platen | 31 |
| Remove Wipers | 31 |
| Install Wipers | 31 |
| Remove Displacement Pump | 31 |
| Install Displacement Pump | 32 |
| Remove Driver | 33 |
| Install Driver | 34 |
| Supply Unit Repair | 34 |

| | |
|---|-----------|
| Parts | 35 |
| D200s 6.5 in. Supply Units | 35 |
| D200 3 in. Supply Units | 37 |
| D60 3 in. Supply Units | 39 |
| D200s and D200 Pump Mounts for 55 Gallon (200 Liter) Platen | 41 |
| D60 Pump Mount 257624 for 5 Gallon (20 Liter) Platen | 42 |
| Transformer | 43 |
| Cable Track | 45 |
| 55 Gallon Platen | 46 |
| 200 Liter (55 Gallon) Platen With EPDM Hose Wipers. Specifically for drums used in Japan (GKK) 26D176 | 47 |
| 200 Liter (55 Gallon) Platen Specifically for Drums Used in Japan (GKK), 26D173, 26D174, and 26D175 | 48 |
| 20 Liter (5 Gallon), 30 Liter (8 Gallon), and 60 Liter (16 Gallon) Platens | 49 |
| Common Parts | 51 |
| Kits and Accessories | 54 |
| Drum Roller Kits for D200 and D200S Supply Units, 255627 | 54 |
| Drum Position Clamp Set for D200 Supply Units, 206537 | 54 |
| Drum Position Clamp for D200S Supply Units | 54 |
| Enclosed Wet Cup Recirculation Kit | 54 |
| 200 Liter (55 Gallon) Platen Cover Kits, 255691 | 54 |
| Light Tower Kit, 255468 | 54 |
| ADM Kit, 25E437 | 54 |
| CAN Cables | 54 |
| I/O Cable, 122029 | 54 |
| Communication Gateway Module (CGM) Kits | 55 |
| Low Level Sensor Kit, 25E447 | 57 |
| Tandem Connection Kit, 25E595 | 58 |
| Tandem Depressurization/Recirculation Kit, 25E618 (carbon steel), 25E619 (stainless steel) | 59 |
| Tandem Fluid Filter Kit, 25E620 | 63 |
| Dimensions | 65 |
| Dimensions | 66 |
| Technical Specifications | 68 |
| California Proposition 65 | 69 |
| Graco Standard Warranty | 70 |
| Graco Information | 70 |

Related Manuals

| Manual | Description |
|--------|--|
| 3A6586 | E-Flo SP Electric Pump Instructions - Parts |
| 3A6724 | E-Flo SP Software Instructions |
| 313526 | Supply Systems Operation |
| 312375 | Check-Mate® Displacement Pumps Instructions-Parts |
| 334198 | 55 Gal, 16 Gal, and 5 Gal Ram Module Repair-Parts |
| 311827 | Dura-Flo™ Displacement Pumps (145cc, 180cc, 220cc, 290cc) Instructions-Parts |
| 311825 | Dura-Flo™ Displacement Pumps (430cc, 580cc) Instructions-Parts |
| 311717 | Carbon Steel Displacement Pump (1000cc) Instructions-Parts |
| 312889 | 60 cc Check-Mate Displacement Pump Repair Parts |
| 312467 | 100 cc Check-Mate Displacement Pump Repair Parts |
| 312468 | 200 cc Check-Mate Displacement Pump Repair Parts |
| 312469 | 250 cc Check-Mate Displacement Pump Repair Parts |
| 312470 | 500 cc Check-Mate Displacement Pump Repair Parts |
| 312374 | Air Controls Instructions-Parts |
| 312491 | Pump Fluid Purge Kit Instructions - Parts |
| 312492 | Drum Roller Kit Instructions |
| 312493 | Light Tower Kit Instructions |
| 312494 | Enclosed Wetcup Recirculation Kit Instructions - Parts |
| 406681 | Platen Cover Kit |
| 334048 | EPDM Hose Wiper Kit Instructions - Parts |
| 3A6321 | ADM Token In-System Programming Instructions |
| 3A6482 | APD20 Advanced Precision Driver Instructions |

Models

Check the identification plate (ID) for the 7-digit part number of the supply system. Use the following matrix to define the construction of the supply system, based on the seven digits. For example, Part No. **EMC1121** represents an electric supply system (**EM**), a carbon steel Check-Mate 100 Severe Duty displacement pump with an electric driver (**C1**), a 3 in. dual post ram with integrated air controls (**1**), a 5-gallon platen with a nitrile seal (**2**), and 240 VAC power (**1**).

NOTE: Systems with the **EMD** as the first and second digits are Dura-Flo supply systems. See page 5 for the list of **Preconfigured Systems Using the 55G/200L Platen Size Specifically For Drums Used In Japan (GKK)**. These drums are slightly smaller in diameter than standard drums.

The digits in the matrix do not correspond to the Ref. Nos. in the Parts drawings and lists.

| EM | C1 | 1 | | | | 2 | | | | | 1 | | | | | |
|--------------------------------|---|-------------|------|---------|-----------|-------------------------|-------------|--------------|-----------------|---------------|-----------------------------|--------------|-------------|---|------|---------|
| | | Fifth Digit | | | | Sixth Digit | | | | | Seventh Digit | | | | | |
| | | Ram Options | | | | Platen and Seal Options | | | | | Interface and Power Options | | | | | |
| First and Second Digit | Third and Fourth Digit | Pump Code | Size | Style | Drum Size | Air Controls | Platen Size | Platen Style | Platen Material | Seal Material | Ram Compatibility | Interface | Power | | | |
| EM (Electric Supply System) | (See Table 1: for 2-digit Check-Mate Pump Code) | 1 | 1 | 3 in. | D60 | 20 L (5 Gal) | INT | 1 | No Platen | | | | | 1 | None | 240 VAC |
| | | | 2 | 3 in. | D200 | 200 L (55 Gal) | INT | 2 | 20 L (5 Gal) | F, SW | CS | Nitrile | D60 | 2 | None | 480 VAC |
| | | | 3 | 6.5 in. | D200s | 200 L (55 Gal) | INT | 3 | 20 L (5 Gal) | F, SW | CS | Polyurethane | D60 | 3 | ADM | 240 VAC |
| | | | | | | | | 4 | 20 L (5 Gal) | F, DW | CS | Nitrile | D60 | 4 | ADM | 480 VAC |
| | | | | | | | | 5 | 20 L (5 Gal) | F, DW | CS | Polyurethane | D60 | | | |
| | | | | | | | | 6 | 20 L (5 Gal) | F, SW | SS | PTFE coated | D60 | | | |
| | | | | | | | | 7 | 200 L (55 Gal) | DR | PTFE Coated AL | EPDM | D200, D200s | | | |
| | | | | | | | | 8 | 200 L (55 Gal) | DR | AL | EPDM | D200, D200s | | | |
| | | | | | | | | 9 | 200 L (55 Gal) | DR | AL | Neoprene | D200, D200s | | | |
| | | | | | | | | A | 200 L (55 Gal) | DR | AL | EPDM Hose | D200, D200s | | | |

NOTE: See page 5 for the list of **Preconfigured Systems Using the 55G/200L Platen Size Specifically For Drums Used In Japan (GKK)**. :

INT = Integrated air controls SW = Single wiper CS = Carbon Steel Severe Duty CM = Carbon Steel MaxLife®
 F = Flat DW = Double wiper SS = Stainless Steel Severe Duty SM = Stainless Steel MaxLife
 DR = Dual o-ring AL = Aluminum

Table 1: Pump Code Index

| Pump Code | Part No. | Pump Type | Pump Size | Pump Material |
|-----------|----------|------------------|-----------|---------------|
| C1 | EC100CS1 | Check-Mate | 100cc | CS |
| C2 | EC100CM1 | Check-Mate | 100cc | CM |
| C3 | EC100SS1 | Check-Mate | 100cc | SS |
| C4 | EC100SM1 | Check-Mate | 100cc | SM |
| C5 | EC200CS1 | Check-Mate | 200cc | CS |
| C6 | EC200CM1 | Check-Mate | 200cc | CM |
| C7 | EC200SS1 | Check-Mate | 200cc | SS |
| C8 | EC200SM1 | Check-Mate | 200cc | SM |
| C9 | EC250CS1 | Check-Mate | 250cc | CS |
| CA | EC250CM1 | Check-Mate | 250cc | CM |
| CB | EC250SS1 | Check-Mate | 250cc | SS |
| CC | EC250SM1 | Check-Mate | 250cc | SM |
| CD | EC500CS1 | Check-Mate | 500cc | CS |
| CE | EC500CM1 | Check-Mate | 500cc | CM |
| CF | EC500SS1 | Check-Mate | 500cc | SS |
| CG | EC500SM1 | Check-Mate | 500cc | SM |
| CH | EC100CE1 | Check-Mate Elite | 100cc | CS |

| Pump Code | Part No. | Pump Type | Pump Size | Pump Material |
|-----------|----------|------------------|-----------|---------------|
| CJ | EC200CE2 | Check-Mate Elite | 200cc | CS |
| D1 | ED115CS1 | Dura-Flo | 115cc | CS |
| D2 | ED145CS1 | Dura-Flo | 145cc | CS |
| D3 | ED145SS1 | Dura-Flo | 145cc | SS |
| D4 | ED180CS1 | Dura-Flo | 180cc | CS |
| D5 | ED180SS1 | Dura-Flo | 180cc | SS |
| D6 | ED220CS1 | Dura-Flo | 220cc | CS |
| D7 | ED220SS1 | Dura-Flo | 220cc | SS |
| D8 | ED290CS1 | Dura-Flo | 290cc | CS |
| D9 | ED290SS1 | Dura-Flo | 290cc | SS |
| DA | ED430CS1 | Dura-Flo | 430cc | CS |
| DB | ED430SS1 | Dura-Flo | 430cc | SS |
| DC | ED430SM1 | Dura-Flo | 430cc | SM |

NOTE: See the E-Flo SP Electric Pump Instructions-Parts manual for a complete parts list.

Preconfigured Systems Using the 55G/200L Platen Size Specifically For Drums Used In Japan (GKK)

Supply Units for Japan Sized Platens

| Preconfigured Number | Similar Configured Number | Description - Unit with Japan Platen Size (GKK) | Platen Number |
|----------------------|---------------------------|---|---------------|
| 26D168 | EMC5281 | SUPPLY UNIT, D200, CM200CS, EP, 240V GKK | 26D174 |
| 26D169 | EMC5283 | SUPPLY UNIT, D200, CN200CS, EP, 240V, ADM, GKK | 26D174 |
| 26D170 | EMCD281 | SUPPLY UNIT, D200, CM500CS, EP, 240, GKK | 26D174 |
| 26D171 | EMCD283 | SUPPLY UNIT, D200, CM500CS, EP, 240V, ADM, GKK | 26D174 |

Kits for Japan Sized Platens

| Platen Kit Number | Similar Kit Number | Description - Unit with Japan Platen Size (GKK) | Platen Style | Platen Material | Seal Material |
|-------------------|--------------------|---|--------------|-----------------|---------------|
| 26D173 | EMC5281 | KIT, platen, 55G, Neoprene, GKK | 26D174 | AL | Neoprene |
| 26D174 | EMC5283 | KIT, platen, 55G, EPDM, GKK | 26D174 | AL | EPDM |
| 26D175 | EMCD281 | KIT, platen, 55G, EPDM, PTFE, GKK | 26D174 | PTFE coated AL | EPDM |
| 26D176 | EMCD283 | KIT, platenm 55G, EPDM, hose, GKK | 26D174 | AL | EPDM hose |

System Pressure

Due to factors such as the dispensing system design, the material being pumped, and the flow rate, the dynamic pressure will not reach the rated working (stall) pressure of the system.

Pressure Table

| Pressure Table | | | | | |
|----------------|-------------------|--|------|-----------------------|-----|
| | Lower Size | Max Working /Run Pressure (ADM Setpoint) * | | Max Deadhead Pressure | |
| | | psi | bar | psi | bar |
| Check-Mate | 100CS/CM/SS/SM | 6,000 | 414 | 6,000 | 414 |
| | 100CE | 4,200 | 290 | 5,500 | 380 |
| | 200CS/CM/SS/SM/CE | 3,220 | 222 | 4,200 | 290 |
| | 250CS/CM/SS/SM | 2,580 | 178 | 3,400 | 234 |
| | 500CS/CM/SS/SM | 1,290 | 88.9 | 1,600 | 110 |
| Dura-Flow | 145SS | 4,440 | 306 | 5,600 | 386 |
| | 180SS | 3,580 | 247 | 4,500 | 310 |
| | 220SS | 2,930 | 202 | 3,700 | 255 |
| | 290SS | 2,200 | 153 | 2,800 | 193 |
| | 430CS/SS/SM | 1,500 | 103 | 1,900 | 131 |
| | 115CS | 5,600 | 386 | 6,000 | 414 |
| | 145CS | 4,440 | 306 | 5,600 | 386 |
| | 180CS | 3,580 | 247 | 4,500 | 310 |
| | 220CS | 2,930 | 202 | 3,700 | 255 |
| | 290CS | 2,220 | 153 | 2,800 | 193 |

* Use this pressure for sizing the system.

Flow Rate Table

| | Lower Size | Flow Rate (cc/min) | Flow Rate (gpm) | Outlet Fitting Size |
|------------|-------------------|--------------------|-----------------|----------------------|
| Check-Mate | 100CS/CM/SS/SM/CE | 2,500 | 0.66 | 1 in. NPT female |
| | 200CS/CM/SS/SM/CE | 5,000 | 1.32 | 1 in. NPT female |
| | 250CS/CM/SS/SM | 6,250 | 1.65 | 1 in. NPT female |
| | 500CS/CM/SS/SM | 12,500 | 3.30 | 1-1/2 in. NPT female |
| Dura-Flow | 145SS | 3,625 | 0.96 | 1 in. NPT female |
| | 180SS | 4,500 | 1.19 | 1 in. NPT female |
| | 220SS | 5,500 | 1.45 | 1 in. NPT female |
| | 290SS | 7,250 | 1.92 | 1 in. NPT female |
| | 430CS/SS/SM | 10,750 | 2.84 | 1-1/2 in. NPT female |
| | 115CS | 2,875 | 0.76 | 1 in. NPT female |
| | 145CS | 3,625 | 0.96 | 1 in. NPT female |
| | 180CS | 4,500 | 1.19 | 1 in. NPT female |
| | 220CS | 5,500 | 1.45 | 1 in. NPT female |
| | 290CS | 7,250 | 1.92 | 1 in. NPT female |

Tandem Ram

How to Buy

1. Configure Tandem Ram “A” - E-Flo SP Ram with an ADM (Quantity 1 per Tandem System).
 - Example: **EMC1283** – D200 Ram, Electric Pump with Check-Mate 100 CS Lower, 200L EPDM Platen, 240V, with ADM.
2. Configure Tandem Ram “B” - E-Flo SP Ram without an ADM (Quantity 1 per Tandem System).
 - Example: **EMC1281** – D200 Ram, Electric Pump with Check-Mate 100 CS Lower, 200L EPDM Platen, 240V, without ADM.
3. Purchase Tandem Connection Kit, **25E595** (Quantity 1 per Tandem System).
4. Purchase Accessories.
 - Depressurization/Recirculation Kit (Quantity 1 per Ram)
 - 25E618**: for Carbon Steel Pump Lowers
 - 25E619**: for Stainless Steel Pump Lowers
 - Fluid Filter Kit, **25E620** (Quantity 1 per Tandem System)
 - Extension Cables for Fluid Filter Monitoring Pressure Transducers (Quantity 1 per Ram)
 - 124943**: 1 meter
 - 122497**: 2 meters
 - 124409**: 3 meters
 - 17H363**: 7.5 meters
 - 17H364**: 16 meters
 - Low Level Sensor Kit, **25E447** (Quantity 1 per Ram)

NOTE: Rams come with Empty Level Sensors already installed.

5. Purchase hoses for the system.

- For Check-Mate Pumps:

| Pump Lower Size | Max. Pressure Rating |
|-----------------|----------------------|
| 100cc | 6000 psi |
| 200cc | 4200 psi |
| 250cc | 3400 psi |
| 500cc | 1600 psi |

- For Dura-Flo Pumps:

| Pump Lower Size | Max. Pressure Rating |
|-----------------|----------------------|
| 115cc | 6000 psi |
| 145cc | 5600 psi |
| 180cc | 4500 psi |
| 220cc | 3700 psi |
| 290cc | 2800 psi |
| 430cc | 1900 psi |

Warnings

The following warnings are for the setup, use, grounding, maintenance, and repair of this equipment. The exclamation point symbol alerts you to a general warning and the hazard symbols refer to procedure-specific risks. When these symbols appear in the body of this manual or on warning labels, refer back to these Warnings. Product-specific hazard symbols and warnings not covered in this section may appear throughout the body of this manual where applicable.

| | |
|--|---|
|  <h2 style="margin: 0;">DANGER</h2> | |
|  | <p>SEVERE ELECTRIC SHOCK HAZARD</p> <p>This equipment can be powered by more than 240 V. Contact with this voltage will cause death or serious injury.</p> <ul style="list-style-type: none"> • Turn off and disconnect power at main switch before disconnecting any cables and before servicing equipment. • This equipment must be grounded. Connect only to grounded power source. • All electrical wiring must be done by a qualified electrician and comply with all local codes and regulations. |

| | |
|---|---|
|  <h2 style="margin: 0;">WARNING</h2> | |
|      | <p>SKIN INJECTION HAZARD</p> <p>High-pressure fluid from dispensing device, hose leaks, or ruptured components will pierce skin. This may look like just a cut, but it is a serious injury that can result in amputation. Get immediate surgical treatment.</p> <ul style="list-style-type: none"> • Do not point dispensing device at anyone or at any part of the body. • Do not put your hand over the fluid outlet. • Do not stop or deflect leaks with your hand, body, glove, or rag. • Follow the Pressure Relief Procedure when you stop dispensing and before cleaning, checking, or servicing equipment. • Tighten all fluid connections before operating the equipment. • Check hoses and couplings daily. Replace worn or damaged parts immediately. |
|   | <p>MOVING PARTS HAZARD</p> <p>Moving parts can pinch, cut or amputate fingers and other body parts.</p> <ul style="list-style-type: none"> • Keep clear of moving parts. • Do not operate equipment with protective guards or covers removed. • Equipment can start without warning. Before checking, moving, or servicing equipment, follow the Pressure Relief Procedure and disconnect all power sources. |

WARNING



FIRE AND EXPLOSION HAZARD

Flammable fumes, such as solvent and paint fumes, in **work area** can ignite or explode. Paint or solvent flowing through the equipment can cause static sparking. To help prevent fire and explosion:



- Use equipment only in well-ventilated area.
- Eliminate all ignition sources; such as pilot lights, cigarettes, portable electric lamps, and plastic drop cloths (potential static sparking).
- Ground all equipment in the work area. See **Grounding** instructions.
- Never spray or flush solvent at high pressure.
- Keep work area free of debris, including solvent, rags and gasoline.
- Do not plug or unplug power cords, or turn power or light switches on or off when flammable fumes are present.
- Use only grounded hoses.
- Hold gun firmly to side of grounded pail when triggering into pail. Do not use pail liners unless they are anti-static or conductive.
- **Stop operation immediately** if static sparking occurs or you feel a shock. Do not use equipment until you identify and correct the problem.
- Keep a working fire extinguisher in the work area.



EQUIPMENT MISUSE HAZARD

Misuse can cause death or serious injury.



- Do not operate the unit when fatigued or under the influence of drugs or alcohol.
- Do not exceed the maximum working pressure or temperature rating of the lowest rated system component. See **Technical Specifications** in all equipment manuals.
- Use fluids and solvents that are compatible with equipment wetted parts. See **Technical Specifications** in all equipment manuals. Read fluid and solvent manufacturer's warnings. For complete information about your material, request Safety Data Sheets (SDSs) from distributor or retailer.
- Turn off all equipment and follow the **Pressure Relief Procedure** when equipment is not in use.
- Check equipment daily. Repair or replace worn or damaged parts immediately with genuine manufacturer's replacement parts only.
- Do not alter or modify equipment. Alterations or modifications may void agency approvals and create safety hazards.
- Make sure all equipment is rated and approved for the environment in which you are using it.
- Use equipment only for its intended purpose. Call your distributor for information.
- Route hoses and cables away from traffic areas, sharp edges, moving parts, and hot surfaces.
- Do not kink or over bend hoses or use hoses to pull equipment.
- Keep children and animals away from work area.
- Comply with all applicable safety regulations.



SPLATTER HAZARD

Hot or toxic fluid can cause serious injury if splashed in the eyes or on skin. During blow off of platen, splatter may occur.

- Use minimum air pressure when removing platen from drum.

WARNING



TOXIC FLUID OR FUMES HAZARD

Toxic fluids or fumes can cause serious injury or death if splashed in the eyes or on skin, inhaled, or swallowed.

- Read Safety Data Sheets (SDSs) to know the specific hazards of the fluids you are using.
- Store hazardous fluid in approved containers, and dispose of it according to applicable guidelines.



PERSONAL PROTECTIVE EQUIPMENT

Wear appropriate protective equipment when in the work area to help prevent serious injury, including eye injury, hearing loss, inhalation of toxic fumes, and burns. Protective equipment includes but is not limited to:

- Protective eyewear, and hearing protection.
- Respirators, protective clothing, and gloves as recommended by the fluid and solvent manufacturer.

Component Identification


Typical Installation

D200 3 in. and D200s 6.5 in. Dual Post

NOTICE

Always lift the supply system at the proper lift locations (see FIG. 1). Do **not** lift in any other way. Failure to lift at the proper lift locations can result in damage to the supply system.

EMC1223 Model Shown

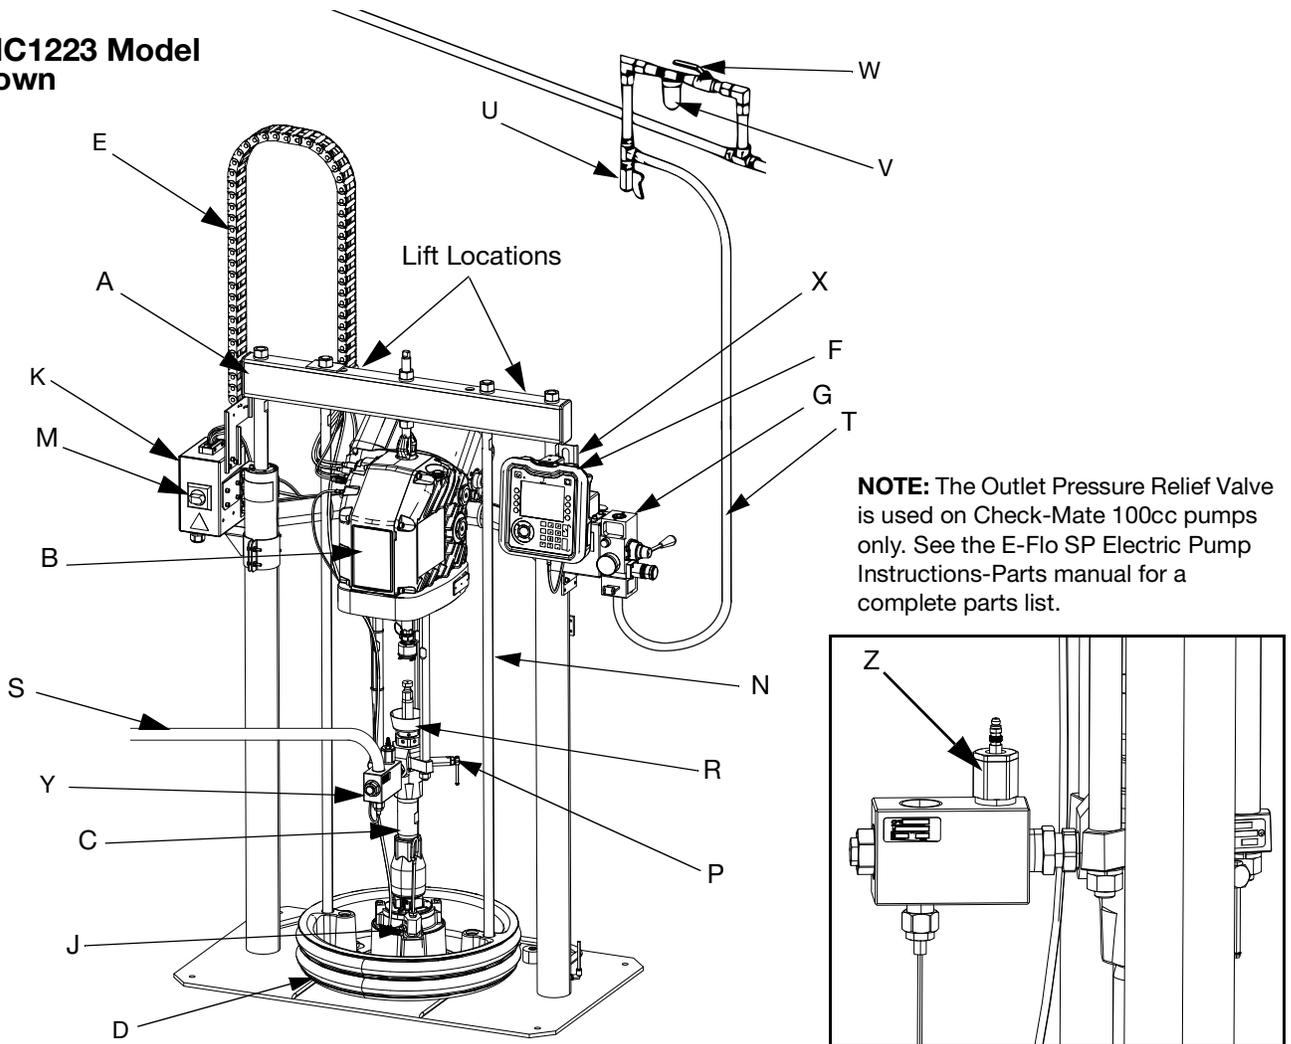

NOTE: The Outlet Pressure Relief Valve is used on Check-Mate 100cc pumps only. See the E-Flo SP Electric Pump Instructions-Parts manual for a complete parts list.

FIG. 1: Typical Installation

Key:

- | | | | |
|---|--------------------------------------|---|--|
| A | Ram Assembly | N | Platen Lift Rod |
| B | Electric Driver | P | Pump Bleed Valve |
| C | Displacement Pump | R | Enclosed Wet Cup |
| D | Platen | S | Fluid Line (not supplied) |
| E | Cable Track | T | Air Line (not supplied) |
| F | Advanced Display Module (ADM) | U | Air Line Drain Valve (not supplied) |
| G | Integrated Air Controls (see FIG. 2) | V | Air Filter (not supplied) |
| J | Platen Bleed Port | W | Bleed Type Air Shutoff Valve (required) (not supplied) |
| K | Power Junction Box | X | Level Sensors |
| M | Disconnect Switch | Y | Outlet Pressure Transducer |
| | | Z | Outlet Pressure Relief Valve (Check-Mate 100 only) |

Integrated Air Control Module

D200, D200s, and D60 Models

The integrated air controls include:

- **Main air slider valve (AA):** turns air on and off to the system. When closed, the valve relieves pressure downstream.
- **Ram air regulator (AB):** controls ram up and down pressure and blowoff pressure.
- **Ram director valve (AC):** controls ram direction.
- **Exhaust port with muffler (AD)**
- **Blowoff button (AE):** turns air on and off to push the platen out of an empty drum.

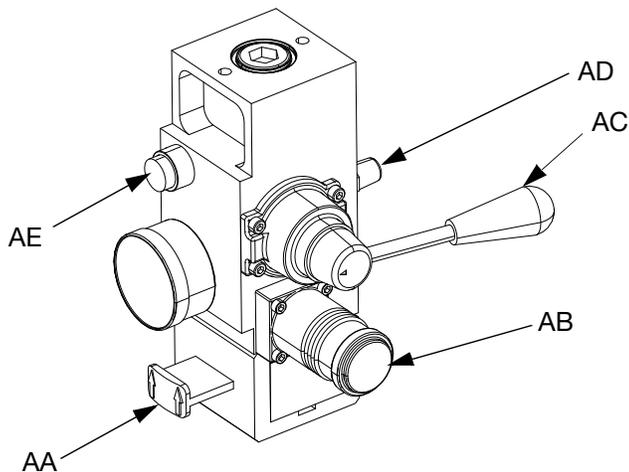


FIG. 2. Integrated Air Control Module

Integrated Air Line Accessories

See FIG. 1.

- **Air line drain valve (U).**
- **Air line filter (V):** removes harmful dirt and moisture from compressed air supply.
- **Second bleed-type air valve (W) (required):** isolates air line accessories for servicing. Locate upstream from all other air line accessories.
- **Air relief valve (required) (not visible):** automatically relieves excessive pressure.

Advanced Display Module (ADM)

Front and Rear Views

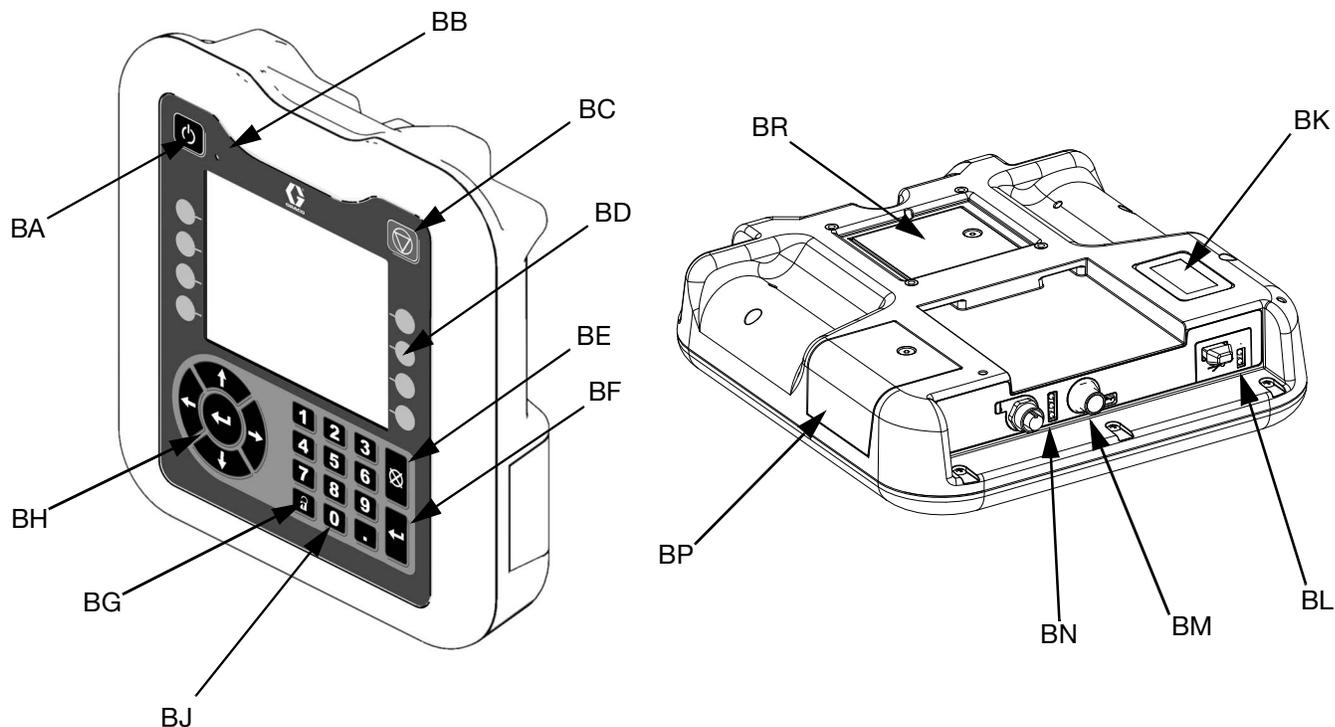


FIG. 3: ADM Component Identification

Key:

BA Pump Enable

Enables the pump. Toggles between Active and System Off.

BB Pump Status Indicator Light

BC Pump Soft Stop

Stops all pump processes and disables the pump.

BD Soft Keys

Defined by the icon on the screen next to the soft key.

BE Cancel

Cancel a selection or number entry while in the process of entering a number or making a selection. Cancels the pump processes.

BF Enter

Accept change, acknowledge error, select item, and toggle selected item.

BG Lock/Setup

Toggle between run and setup screens.

BH Directional Keypad

Navigate within a screen or to a new screen.

BJ Numeric Keypad

BK Part Number Identification Label

BL USB Interface

BM CAN Cable Connection

Power and communication.

BN Module Status LEDs

Visual indicators to show the status of the ADM.


BP Token Access Cover

Access cover for software token.

BR Battery Access Cover

Platen Component Identification

Model 255319, 200 liter (55 gallon)

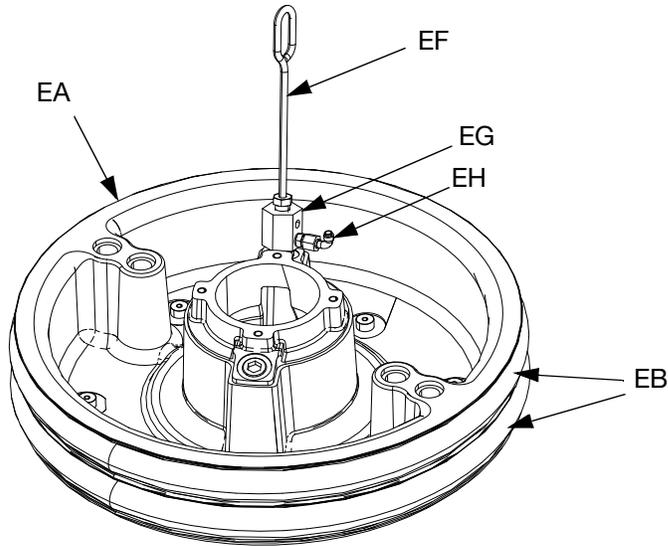

Model 256742 and 256745,
20 liter (5 gallon)

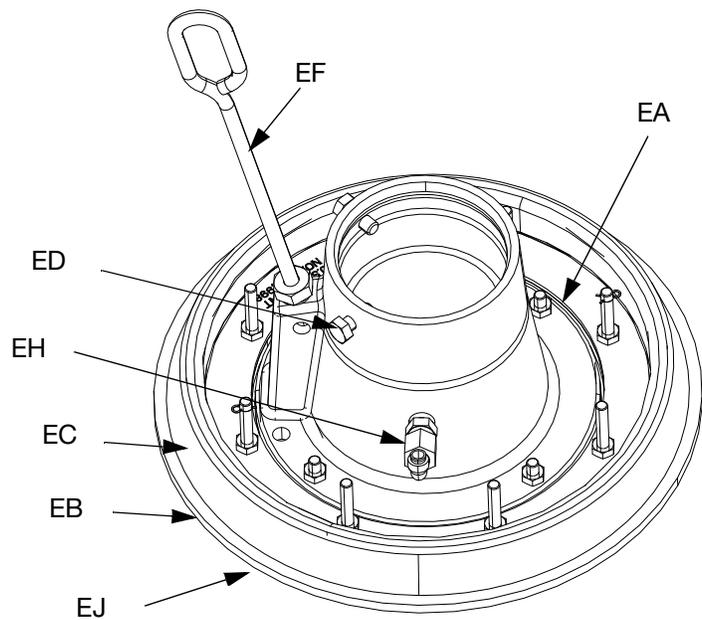


FIG. 4

Key:

- EA Plate
- EB Wipers
- EC Spacer
- ED Cap Screws
- EE Clamps (not shown)
- EF Bleed Stick
- EG Bleed Port
- EH Air Assist Body Check Valve
- EJ Wiper Plate (under wiper)
- EK O-ring Seal (not shown)

Junction Box Connections

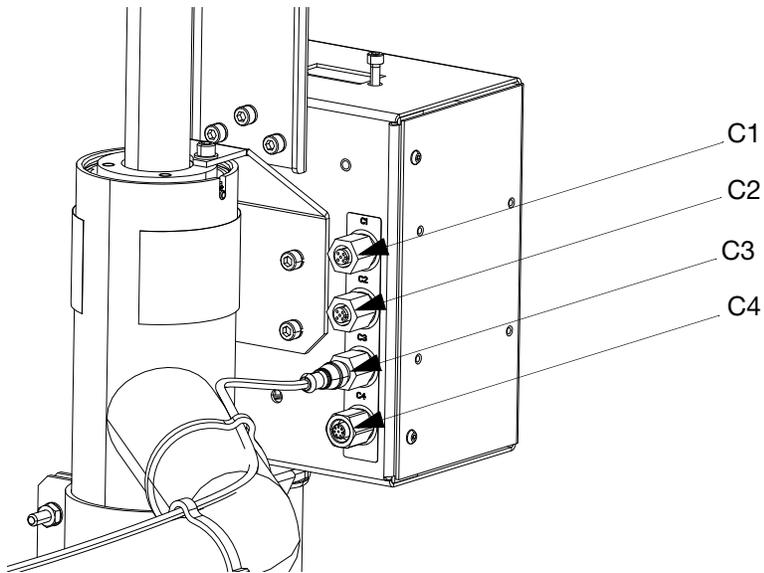


FIG. 5

Key:

- C1 CGA CAN Port
- C2 GCA CAN Port
- C3 Low and Empty Level Sensor Input
- C4 Fluid Filter Solenoid Input

NOTE: See the E-Flo SP Software Instructions manual for all I/O descriptions.

Installation

| | | | | |
|--|---|--|--|--|
|  |  | | | |
| All electrical wiring must be done by a qualified electrician and comply with all local codes and regulations. | | | | |

Location

To properly locate and anchor the supply system, refer to **Dimensions** on page 65.

| NOTICE |
|---|
| Always lift the supply system at the proper lift locations (see FIG. 1). Do not lift in any other way. Failure to lift at the proper lift locations can result in damage to the supply system. |

Attach a lifting sling at the proper lift locations. Lift off the pallet using a crane or a forklift.

NOTE: The lift ring on the driver is only to be used for replacing the driver. Do not use it to lift the entire system.

Position the ram so the driver, disconnect switch, air controls, and ADM are easily accessible. Ensure that there is enough space overhead for the ram to raise fully.

Using the holes in the ram base as a guide, drill holes for 1/2 in. (13 mm) anchors.

Ensure that the ram base is level in all directions. If necessary, level the base using metal shims. Secure the base to the floor using 1/2 in. (13 mm) anchors that are long enough to prevent the ram from tipping.

Grounding

| | | | | |
|---|--|---|---|--|
|  |  |  |  | |
| The equipment must be grounded to reduce the risk of static sparking and electric shock. Electric or static sparking can cause fumes to ignite or explode. Improper grounding can cause electric shock. Grounding provides an escape wire for the electric current. | | | | |

Electric pump: the pump is grounded through the power cord.

Ram: the ram is grounded through the power cord.

Air and fluid hoses: use only electrically conductive hoses with a maximum of 500 ft. (150 m) combined hose length to ensure grounding continuity. Check the electrical resistance of the hoses. If the total resistance to ground exceeds 29 megaohms, replace the hose immediately.

Air compressor: follow manufacturer's recommendations.

Dispense valve: ground through connection to a properly grounded fluid hose and pump.

Fluid supply container: follow local code.

Solvent pails used when flushing: follow local code. Use only conductive metal pails, placed on a grounded surface. Do not place the pail on a non-conductive surface, such as paper or cardboard, which interrupts the grounding continuity.

To maintain grounding continuity when flushing or relieving pressure: hold a metal part of the dispense valve firmly to the side of a grounded metal pail, then trigger the valve.

Power Requirements

The system requires a dedicated circuit protected with a circuit breaker.

Driver Line Voltage Rating, 1 Phase

| Voltage | Phase | Hz | Current |
|-------------|-----------|-------|---------|
| 200-240 VAC | Line-Line | 50/60 | 20 A |

Driver Line Voltage Rating With Graco 3 Phase Transformer

| Voltage | Hz | Current | Transformer Type |
|---------|-------|---------|------------------|
| 400 VAC | 50/60 | 35 A | △ |
| 480 VAC | 50/60 | 10 A | △ |

NOTE: Connecting 400 VAC through Graco △ will provide 200 VAC.

Connect Power

NOTICE

To avoid equipment damage, route and secure a power cord that is long enough to allow the full range of movement for the ram.

- Cut power cord wires to the following lengths:
 - Ground wire - 6.5 inches (16.5 cm)
 - Power wires - 3.0 inches (7.6 cm)
 - Add ferrules as necessary. See FIG. 6.

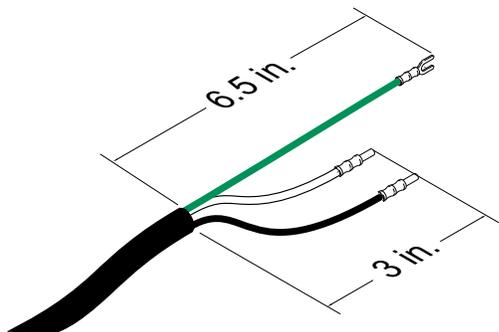


FIG. 6: Power Cord

- Remove the six screws holding the cover of the junction box (K), then remove the junction box cover.

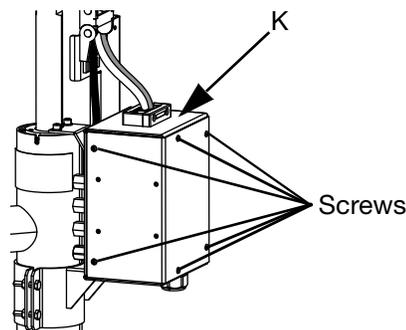


FIG. 7: Remove the Junction Box Cover

- Insert the power cord through the cord grip and into the junction box (K).

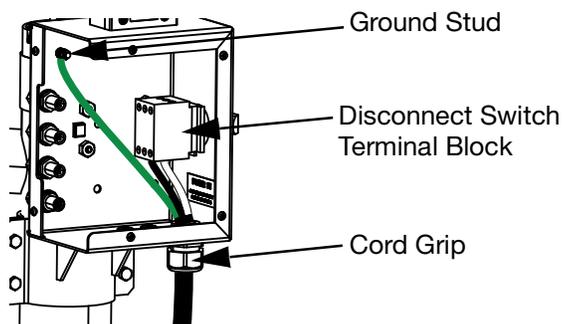


FIG. 8: Power Connection

- Attach the ground wire to the ground stud inside the junction box (K).
- Refer to FIG. 9 and connect the wires from the power cord into terminals 4T2 and 6T3 on the disconnect switch terminal block.

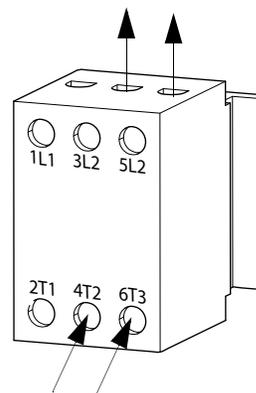


FIG. 9: Disconnect Switch Terminal Block

11. Tighten the cord grip to securely hold the power cord to the junction box (K).
12. Replace the junction box cover and secure it with the six screws that were removed in step 2.

Attach Drum Stops

The electric supply systems are shipped with drum stops in place to help position the drum on the ram. For replacement parts, order Kit 255477. The kit includes 2 each of capscrews, lock washers (not shown), and drum stops.

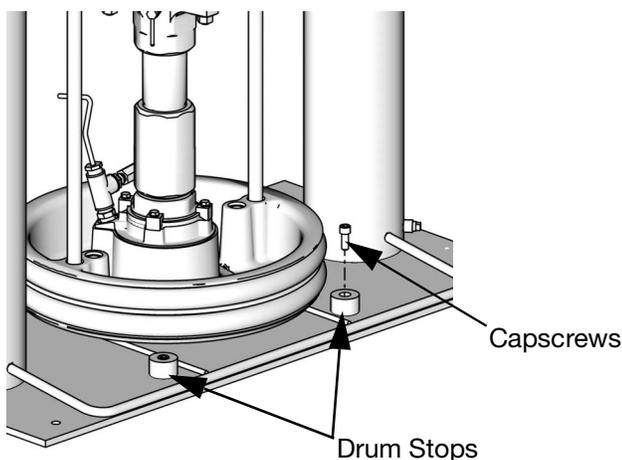


FIG. 10: Drum Stop Installation

1. Locate the correct set of mounting holes on the ram base.
2. Using the capscrews and lock washers, attach the drum stops to the ram base.

Fluid Hose and Air Line Connections

Refer to FIG. 1 on page 11 for a typical installation.

Attach the fluid hose (not supplied) to the Outlet Check Valve (E) connection.

Attach the air line (not supplied) to the bottom of the Integrated Air Control (G) at the 3/4 in. NPT connection.

NOTE: Be sure all components are adequately sized and pressure rated to meet the system's requirements.

Install Vented Oil Cap Before Using Equipment.

The driver gear-box is shipped from the factory pre-filled with oil. The temporary unvented cap prevents oil leaks during shipment. This temporary cap must be replaced with the vented oil cap supplied with the equipment, before use.

NOTE: Prior to use, check oil level. Oil level should be half way up the sight glass.

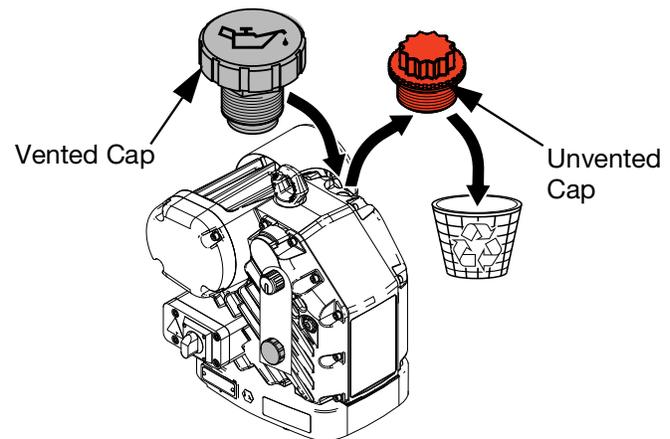


FIG. 11: Unvented and Vented Oil Caps

Setup

Wet Cup



Before starting, fill the wet cup (L) 1/3 full with Graco Throat Seal Liquid (TSL) or a compatible solvent.

Torque the Wet Cup

The wet cup is torqued at the factory; however, throat packing seals on Severe Duty pumps may relax over time. Check wet cup torque frequently after initial start-up and periodically after the first week of production. Maintaining proper wet cup torque is important to extending seal life.

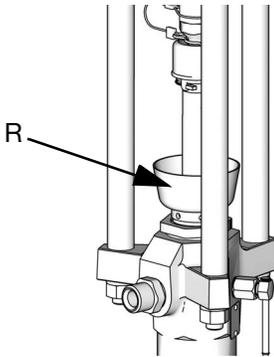


FIG. 12: Wet Cup


NOTE: MaxLife pumps use a special u-cup throat seal that is non-adjustable and does not require periodic torquing.

1. Follow the **Pressure Relief Procedure** on page 22.
2. Torque the wet cup (R) 95-115 ft-lbs (128-155 N•m) using the packing nut wrench (supplied) whenever necessary. Do not overtighten the wet cup. See the table below for torque values.

Startup

Letters in parenthesis are used in this section for reference to callouts in the **Component Identification** section starting on page 11.

Flush the Pump

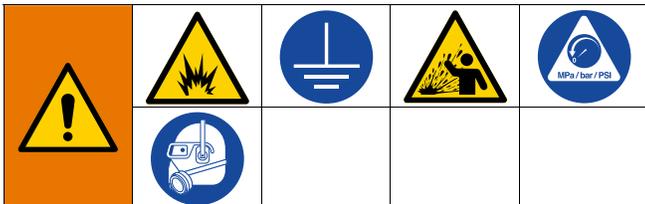

To avoid fire and explosion, always ground the equipment and the waste container. To avoid static sparking and injury from splashing, always flush at the lowest possible pressure.

NOTE: The pump is tested with lightweight oil, which is left in to protect the pump parts. If the fluid you are using may be contaminated by the oil, flush it out with a compatible solvent before using the pump.

Always flush at the lowest pressure possible. Check connectors for leaks and tighten as necessary. Flush with a fluid that is compatible with the fluid being dispensed and the equipment wetted parts.

NOTE: Check with your fluid manufacturer or supplier for recommended flushing fluids and flushing frequency.

NOTICE

To prevent damage to the pump from rust, never leave water or water-based fluid in a carbon steel pump overnight. If you are pumping a water-based fluid, flush with water first. Then flush with a rust inhibitor, such as mineral spirits. Relieve pressure, but leave the rust inhibitor in the pump to protect parts from corrosion.

NOTE: Refer to the E-Flo SP Software Instructions manual for additional information about using the software features of the ADM. See **Related Manuals** on page 3.

1. Follow the **Pressure Relief Procedure** on page 22.
2. Place a pail of compatible solvent in the ram. See **Grounding** instructions for solvent pails on page 16.

3. Turn the disconnect switch (M) ON.
4. At the ADM (F), use the ADM's arrow keys to select the pump you want to flush from the Menu Bar.



NOTE: If multiple pumps are connected together, there can be up to six pumps listed in the Menu Bar.

5. Enter the Edit screen for that pump by pressing the soft key next to the  icon.
6. Press the soft key next to the Pressure Mode  icon.
7. Enter 100 psi (0.69 MPa, 6.9 bar) as the pressure.
8. Press the soft key next to the Pump On/Off  icon to turn on the pump.
9. Adjust pressure as necessary.
10. Hold a metal part of the dispense valve firmly to the side of a grounded metal pail.
11. Open the dispense valve and flush the system until clear solvent flows from the gun/valve.
12. Exit the Edit screen by pressing the soft key next to the  icon.
13. Repeat steps 3 through 11 for each pump you want to flush.
14. Follow the **Pressure Relief Procedure** on page 22.
15. Remove the solvent pail from the ram.

Start and Adjust the Ram



1. Turn the disconnect switch (M) OFF.
2. Raise the Ram by opening the main air slider valve (AA) and setting the ram air regulator (AB) to 40 psi (0.28 MPa, 2.8 bar).
3. Set the ram director valve handle (AC) to UP and let the ram rise to its full height.
4. Set the ram director valve handle (AC) to neutral.
5. Lubricate the platen wiper (EB) with grease or other lubricant compatible with the fluid you will pump.
6. Put a full drum/pail on the ram base and center it under the platen (D).
7. Remove the drum/pail cover and smooth the surface of the fluid with a straightedge. To prevent air from being trapped under the platen, scoop fluid from the center of the pail to the sides, to make the surface concave.
8. Adjust the drum/pail to be sure it is aligned with the platen, and remove the platen bleed stick to open the platen bleed port.

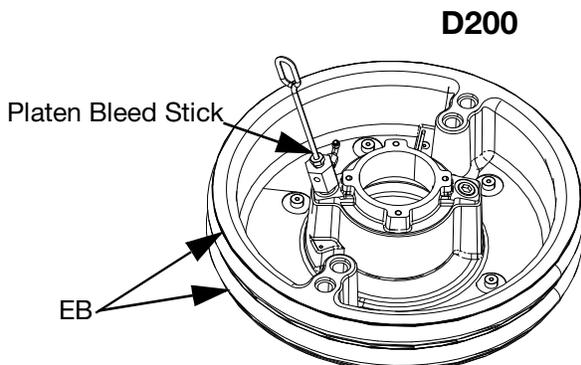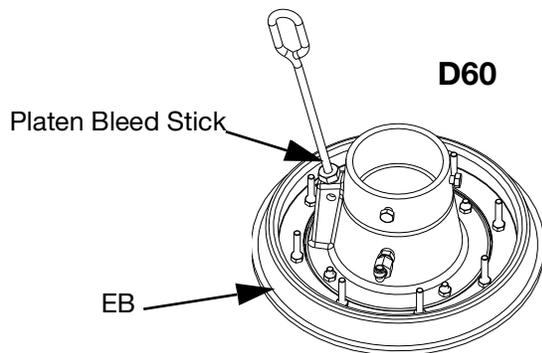

9. With hands away from the drum/pail and the platen, push down on the ram director valve (AC) handle, and lower the ram until the platen rests on the lip of the drum/pail. Move the ram director valve handle to the horizontal position (neutral).
10. Lower the ram:
 - a. Set the ram director valve (AC) to DOWN and continue to lower the ram until fluid appears at the platen bleed port.
 - b. Set the ram director valve to neutral, replace the platen bleed stick, and tighten it securely.

Start and Adjust the Pump




1. With the disconnect switch (M) OFF, set the ram air regulator (AB) to about 50 psi (0.35 MPa, 3.5 bar). Set the ram director valve (AC) to DOWN.
2. Turn the driver disconnect switch (M) ON.
3. Start the pump. See the E-Flo SP Software Instructions manual for instructions on operating the system.
4. Keep the ram director valve (AC) set to DOWN while the pump is operating.

NOTE: Increase air pressure to the ram if the pump does not prime properly with more viscous fluids. Decrease air pressure if fluid is forced out around the top seal or platen.

Pressure Relief Procedure

 Follow the Pressure Relief Procedure whenever you see this symbol.

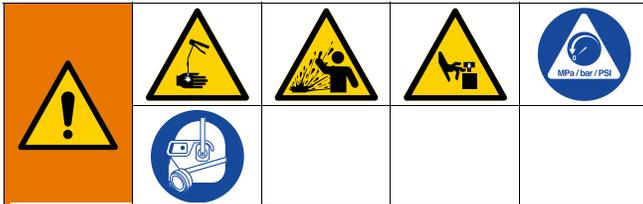

This equipment stays pressurized until pressure is manually relieved. To help prevent serious injury from pressurized fluid, such as skin injection, splashing fluid and moving parts, follow the Pressure Relief Procedure when you stop spraying and before cleaning, checking, or servicing the equipment.

7. Hold a metal part of the dispense valve firmly to the side of a grounded metal pail, and open the dispense valve to relieve pressure.
8. Open your system's fluid line drain valve and open the pump bleed valve (P). Have a container ready to catch the drainage.
9. Leave the pump bleed valve (P) open until ready to dispense again.

1. At the ADM, enter manual mode by pressing the soft key next to the  icon.
2. Press the soft key next to the  icon to stop the pump.
3. Turn the disconnect switch (M) OFF.

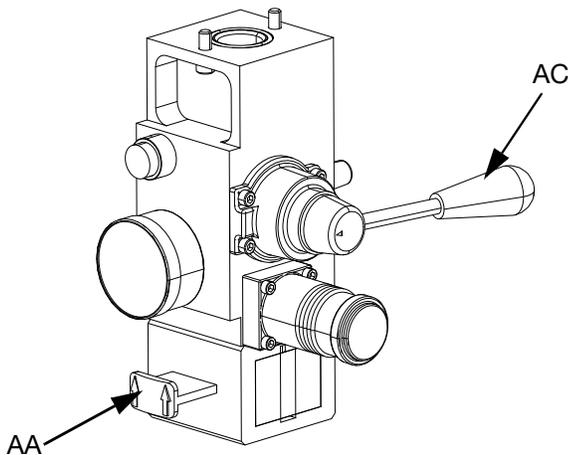


FIG. 13: Air Control for Pressure Relief

4. Close the main air slider valve (AA).
5. Set the ram director valve (AC) to DOWN. The ram will slowly drop.
6. Once the ram is completely down, jog the ram director valve up and down to bleed air from the ram cylinders.

Shutdown and Care of the Pump




NOTICE

To prevent damage to the pump from rust, never leave water or water-based fluid in a carbon steel pump overnight. If you are pumping a water-based fluid, flush with water first. Then flush with a rust inhibitor, such as mineral spirits. Relieve pressure, but leave the rust inhibitor in the pump to protect parts from corrosion.

1. Set the ram director valve (AC) to DOWN, and lower the ram to the desired position for shutdown.
2. Set the ram director valve (AC) to neutral.
3. Stop the pump at the bottom of the stroke to prevent fluid from drying on the exposed displacement rod and damaging the throat packings. See the E-Flo SP Software Instructions manual for information about jogging the pump. See **Related Manuals** on page 3.
4. Always flush the pump before the fluid dries on the displacement rod. Follow steps to **Flush the Pump** on page 20.

Change Drums

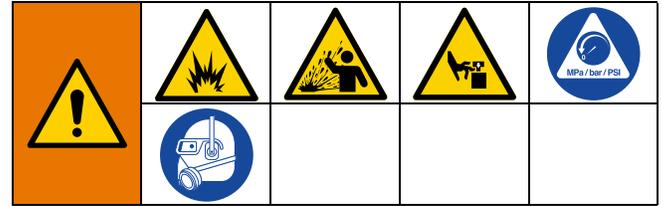

1. Stop the pump.
2. Set the ram director valve (AC) to UP to raise the platen, and immediately press and hold the blowoff air button (AE) until the platen is completely out of the drum. Use the minimum amount of air pressure necessary to push the platen out of the drum.



Excessive air pressure in the material drum could cause the drum to rupture, causing serious injury. The platen must be free to move out of the drum. Never use drum blowoff air with a damaged drum.

3. Release the blowoff air button (AE) and allow the ram to rise to its full height.
4. Remove the empty drum.
5. Inspect the platen and, if necessary, remove any remaining material or material build-up.

Maintenance

Driver Maintenance



NOTICE

Do not open/remove the gear cover. The gear side is not intended to be serviced. Opening the gear cover may alter the factory set bearing pre-load and may reduce the product life.

Preventative Maintenance Schedule

The operating conditions of your particular system determine how often maintenance is required. Establish a preventative maintenance schedule by recording when and what kind of maintenance is needed, and then determine a regular schedule for checking your system.

Change the Oil

NOTE: Change the oil after a break-in period of 200,000 to 300,000 cycles. After the break-in period, change the oil once per year.

1. Follow the **Pressure Relief Procedure** on page 22.
2. Place a minimum 2 quart (1.9 liter) container under the oil drain port.
3. Remove the oil drain plug. See FIG. 14 for the location of the drain plug. Allow all oil to drain from the driver.
4. Reinstall the oil drain plug. Torque to 18-23 ft-lb (25-30 N•m).
5. Open the fill cap and add Graco Part 16W645 ISO 220 silicone-free synthetic EP gear oil. Check the oil level in the sight glass. Fill until the oil level is near the halfway point of the sight glass. The oil capacity is approximately 1.0 - 1.2 quarts (0.9 - 1.1 liters). **Do not overfill.**
6. Reinstall the fill cap.

Check Oil Level

Refer to FIG. 14 below. Check the oil level in the sight glass on a regular basis. The oil level should be near the halfway point of the sight glass when the driver is not running. If the oil is low, open the fill cap and add Graco Part No. 16W645 ISO 220 silicone-free synthetic EP gear oil.

The oil capacity is approximately 1.0 - 1.2 quarts (0.9 - 1.1 liters). **Do not overfill.**

NOTICE

Only use oil with Graco part number 16W645. Any other oil may not lubricate properly and can cause damage to the drive train.

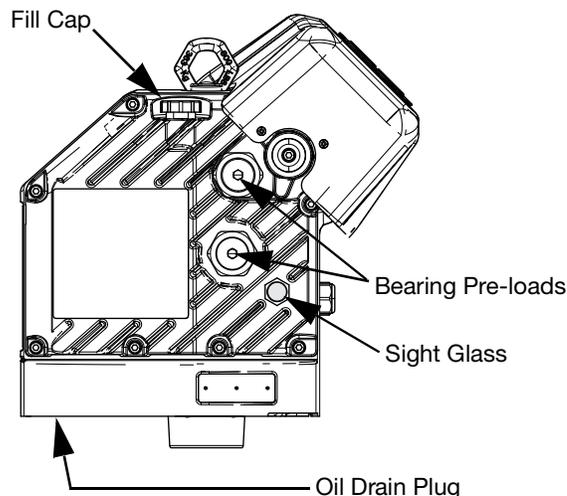


FIG. 14: Sight Glass and Oil Fill Cap

Bearing Pre-Load

The bearing pre-loads are factory set and are not user adjustable. Do not adjust the bearing pre-loads. See APD20 Advanced Precision Driver Instructions-Parts manual for maintenance information.

Platen Maintenance



See FIG. 15. If the platen does not come out of the pail easily when the pump is being raised, the air assist tube (F) or check valve may be plugged. A plugged valve prevents air from reaching the underside of the plate to assist in raising it from the pail.

1. Follow the **Pressure Relief Procedure** on page 22.
2. Refer to parts illustration on page 49 and disassemble air assist valve as shown.
3. Clear air assist tube (AT) in platen. Clean all parts of valve and reassemble.
4. Remove bleed stick (EF) from platen. Push bleed stick through bleed relieve ports to remove material residue.

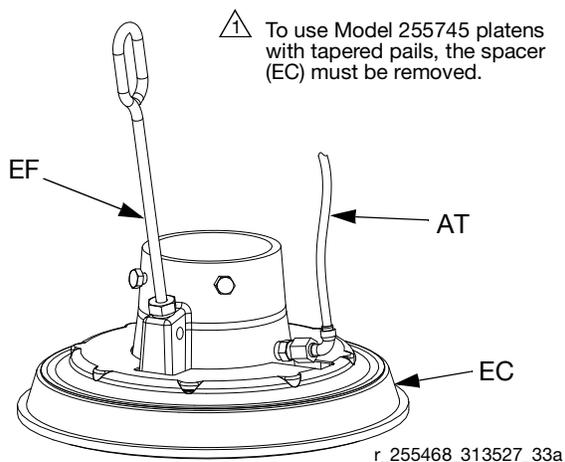


FIG. 15

Adjust Spacers

Tapered and Straight Sided Pails

The platen is supplied for use with 20 liter (5 gallon), 30 liter (8 gallon), and 60 liter (16 gallon) straight sided pails, but only single wiper platens can be easily modified for use with tapered pails.

Platen with Tapered Pails

1. Follow the **Pressure Relief Procedure** on page 22.
2. *Working from the bottom*, use screwdriver to pry spacer (EC) loose. Work spacer upward completely above the flange of the platen. See FIG. 16.
3. By hand, angle spacer (EC) and work it off the plate, pulling it down over the flange and bottom wipers (EB). See FIG. 17.
4. Save spacer (EC), as it is required for other applications.

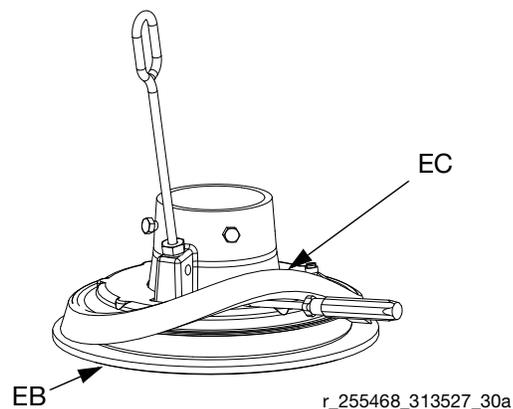


FIG. 16

Platen with straight sided pail

1. Follow the **Pressure Relief Procedure** on page 22.
2. Ensure large diameter of spacer (EC) is facing **down**. Work spacer (EC) up over the platen by hand completely above the flange of the platen. See FIG. 17.
3. *Working from the top*, use screwdriver to position spacer (EC) between flange and wipers (EB). See FIG. 18.

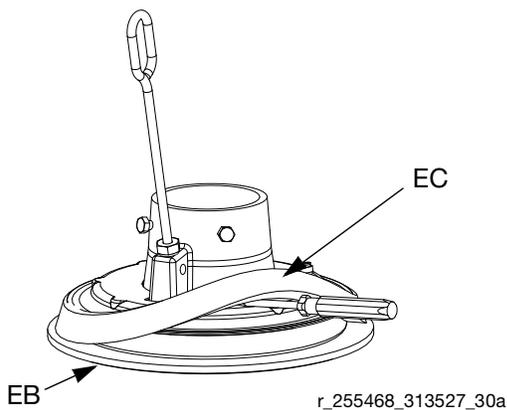


FIG. 17: Sliding spacer

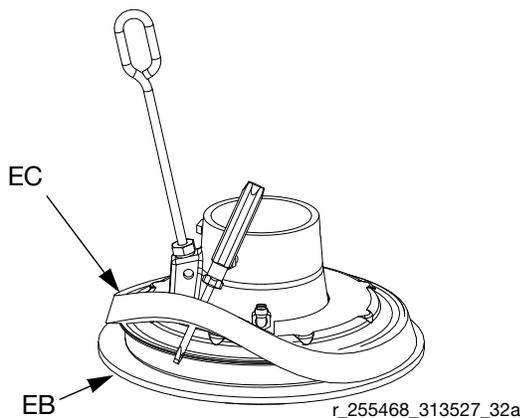


FIG. 18: Installing Spacer

Remove and Reinstall Wipers

Disassemble 20, 30, and 60 Liter Wiper Assemblies

1. Follow the **Pressure Relief Procedure** on page 22.
2. Remove wiper assembly; see FIG. 31 on page 49:
 - a. *For all single wiper platens:* Remove two clips (470) with needle nose pliers and remove platen cover (469).
 - b. Remove eight nuts (459) that hold wiper assembly to platen casting (451) and remove wiper assembly.
 - c. See **Reassemble 20, 30, and 60 Liter Wiper Assemblies** to change wiper sizes, styles, or a complete wiper assembly.
3. Remove eight nuts (459) on wiper assembly.
4. Separate top plate (457), spacer (452), wiper(s) (453), wiper support (454), and bottom plate (455).
5. Clean, inspect, and replace worn components.

Reassemble 20, 30, and 60 Liter Wiper Assemblies

1. Assemble wiper assembly; see FIG. 31 on page 49:
 - a. *For single wiper assemblies with carbon steel platens:* Place bottom plate (455) on flat surface. Place wiper support (454), wiper (453), spacer (452), and top plate (457) on bottom plate (455).
 - b. *For single wiper assemblies with SST platens:* Place bottom plate (455) on flat surface. Place wiper support (454), wiper (453), flowered wiper support (460), PTFE spacer (452), and top plate (457) on bottom plate (455).
 - c. *For double wiper assemblies:* Place bottom plate (455) on flat surface. Place wiper support (454), wiper (453), spacer (452), wiper (453) and top plate (457) on bottom plate (455).
2. Install eight nuts (459) on outer ring. Torque to 45 in-lbs (61 N•m).
3. Replace o-ring (456), or install new o-ring under platen casting (451). Use lubricant to hold in place.

4. Install platen casting (451). Tighten with four nuts (459).

Remove 55 Gallon Platen Wipers

1. Follow the **Pressure Relief Procedure** on page 22.
2. Turn the disconnect switch (M) to OFF.
3. To replace worn or damaged wipers (EB), raise platen up out of drum. Remove drum from base. Wipe fluid off of platen.
4. Cut top and bottom wipers with knife and remove from platen. See FIG. 19.

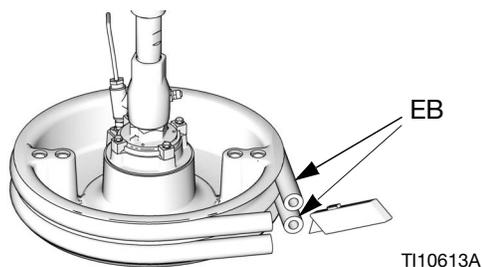


FIG. 19

Reinstall 55 Gallon Platen Wipers

1. Using a wooden or plastic tool to prevent damage to the wiper (EB), clean all material from seal grooves.
2. *Working from the bottom*, angle one wiper (EB) over back of platen. See FIG. 20.
3. Insert wiper (EB) in top groove and run front of wiper into groove.
4. Insert second wiper (EB) in lower groove and run front of wiper into groove.
5. Lubricate outside of wiper with lubricant compatible with material being pumped. Check with material supplier.

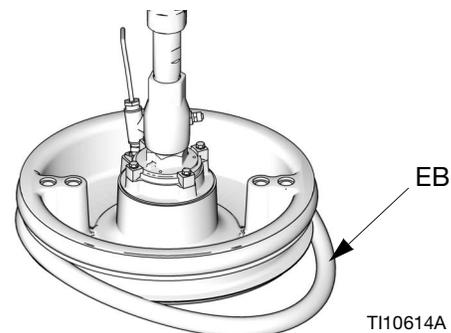


FIG. 20

Remove 55 Gallon Platen Hose Wipers

1. Follow the **Pressure Relief Procedure** on page 22.
2. Turn the disconnect switch (M) to OFF.
3. To replace worn or damaged wipers (EB), raise platen up out of drum. Remove drum from base. Wipe fluid off of platen.
4. Loosen ends of banding (410) with jack screw. See FIG. 21.


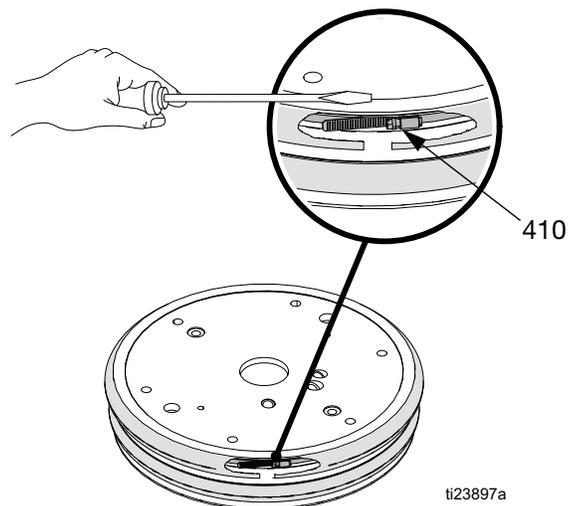



FIG. 21

Reinstall 55 Gallon Plate Hose Wipers




1. Clean all material from the seal grooves. Lubricate ram plate grooves before assembly.
2. Assemble two bands (410) together. Align one end of band about 9 in. from jack screw and tape attached band. Install screw jack in slot.

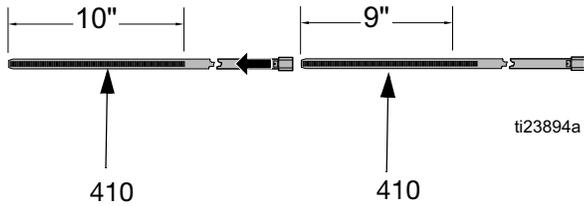

3. Insert jack screw end of band (410) into hose (408 or 409) and push completely through hose.

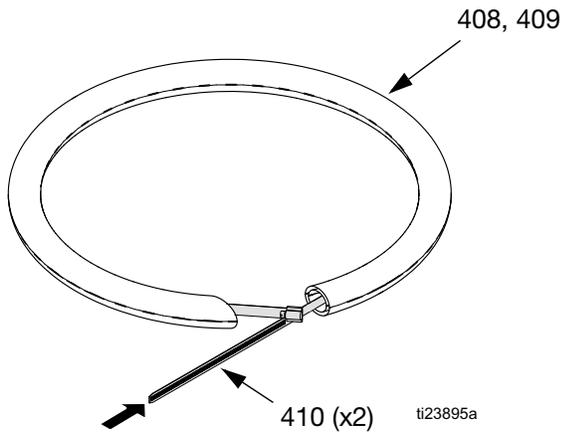


NOTE: To prevent material from potentially leaking past both hoses, ensure hose (408,409) seams are 90°-180° apart, and not on top of each other.

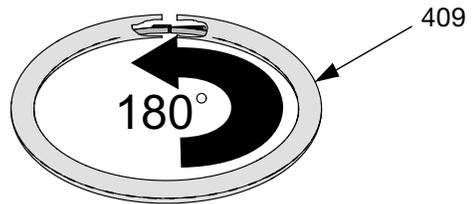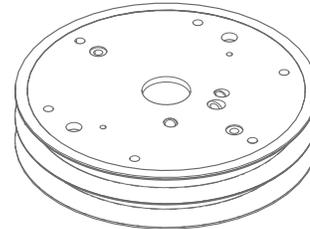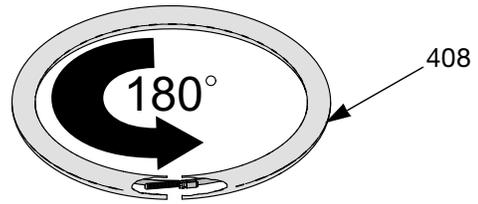


ti23896a

4. Lubricate outside of hoses (408,409) and place on upper or lower groove on plate. Adjust hose and band so that the angled ends of hose press against each other. Tighten two ends of banding (410) together with jack screw.

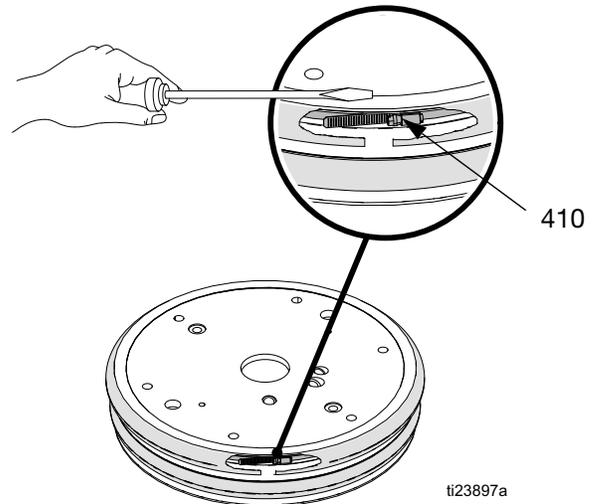

5. Work hose to completely close gap at the ends.

Troubleshooting

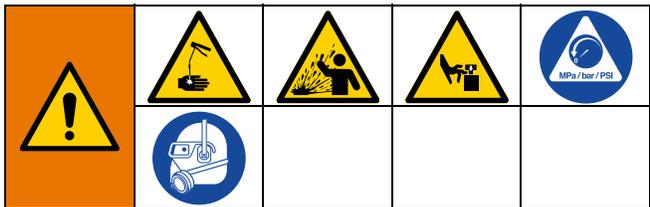

1. Follow **Pressure Relief Procedure**, page 22, before checking or repairing the ram, pump, or platen.

2. Check all possible problems and causes before disassembling the ram, pump, or platen.

NOTE: Refer to Supply Unit Operation manual for descriptions of DataTrak diagnostic codes.

NOTE: Refer to your pump package manual for pump troubleshooting.

| Problem | Cause | Solution |
|--|--|---|
| Ram will not raise or lower. | Closed air valve or clogged air line. | Open, clear. |
| | Not enough air pressure. | Increase. |
| | Worn or damaged piston. | Replace. See Supply Unit Repair on page 34. |
| | Hand valve closed or clogged. | Open, clear. |
| Ram raises and lowers too fast. | Air pressure is too high. | Decrease. |
| Air leaks around cylinder rod. | Worn rod seal. | Replace. See Supply Unit Repair on page 34. |
| Fluid squeezes past ram plate wipers. | Air pressure too high. | Decrease. |
| | Worn or damaged wipers. | Replace. See Remove and Reinstall Wipers on page 26. |
| Pump will not prime properly or pumps air. | Not enough pressure. | Increase pressure setting. |
| | Worn or damaged piston. | Replace. See pump manual. |
| | Hand valve closed or clogged. | Open, clear. See Platen Maintenance on page 25. |
| | Hand valve is dirty, worn, or damaged. | Clean, service. |
| Air assist valve will not hold drum down or push plate up. | Closed air valve or clogged air line. | Open, clear. See Platen Maintenance on page 25. |
| | Not enough air pressure. | Increase. |
| | Valve passage clogged. | Clean. See Platen Maintenance on page 25. |

Repair




Disconnect Pump from Platen

The pump is mounted to the platens by different mounting kits. See the Repair Kits on page 54.


55 Gallon Platen

1. Follow the **Pressure Relief Procedure** on page 22.
2. Turn the disconnect switch (M) to OFF.
3. Remove four hex screws (426), four clamps (427), and washers (425).

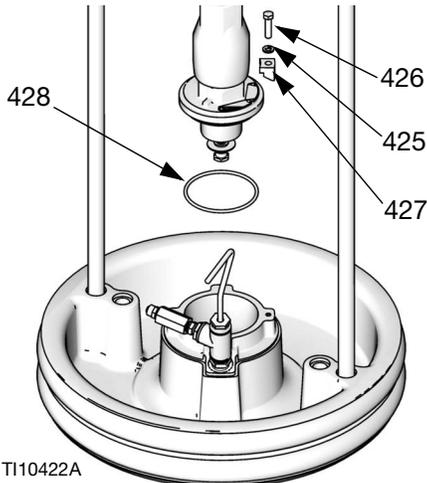


TI10422A

Check-Mate Mounting

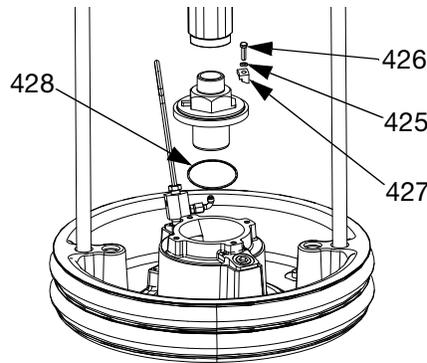

Dura-Flo SS Mounting

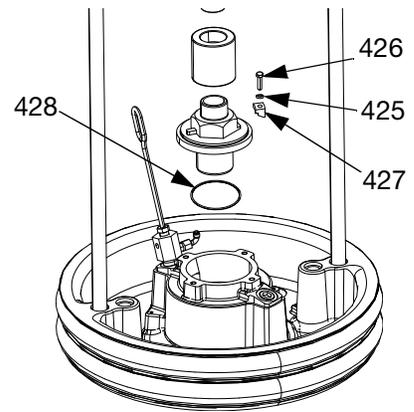


Dura-Flo CS Mounting

4. Carefully pull pump away to prevent damage to pump inlet and remove o-ring (428).


20, 30, and 60 Liter Platen

1. Follow the **Pressure Relief Procedure** on page 22.
2. Turn the disconnect switch (M) to OFF.
3. Loosen two 5/16 in. screws (462) from platen.
4. Carefully pull pump away to prevent damage to pump inlet. If using a pump with intake adapter, remove screws (472), adapter (471), and o-rings (463) from pump inlet.

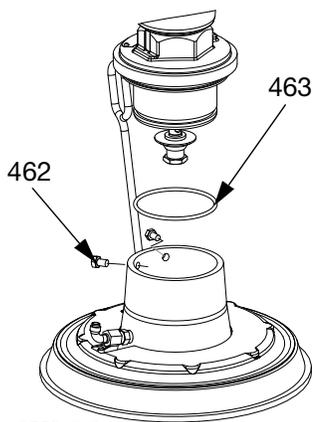


r_255648_313527_35a

Check-Mate Mounting

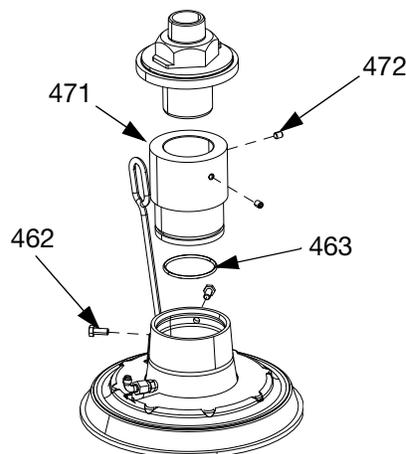

Dura-Flo SS Mounting

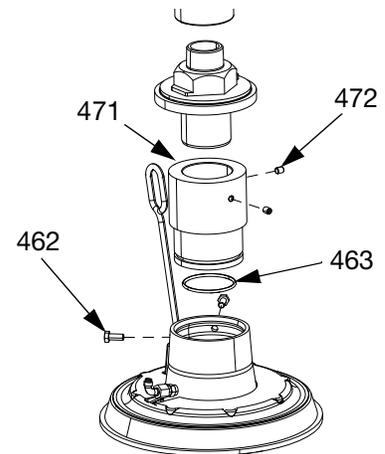

Dura-Flo CS Mounting

FIG. 23: 20, 30, and 60 liter mounting kit

Connect Platen

55 Gallon Platen

1. Place o-ring (428) from mounting kit on the platen. If attached to plate, place displacement pump onto platen. See FIG. 22.
2. Secure pump's intake flange to plate with screws (426), washers (425), and clamps (427) included in mounting kit 255392.

20, 30, and 60 Liter Platen

NOTE: Before installing the 20, 30, or 60 liter platen to a pump with an intake adapter, install adapter and o-ring from mounting kit using the two set screws. See FIG. 23.

1. Place o-ring (463) from mounting kit on pump intake. Loosen the pump intake flange screws (462) and carefully lower pump onto o-ring (463) and platen.
2. Secure pump's intake flange to plate with screws (462).

Remove Wipers

See **Remove and Reinstall Wipers** on page 26.

Install Wipers

See **Remove and Reinstall Wipers** on page 26.

Remove Displacement Pump



The procedure for removing your displacement pump depends on which driver and platen your unit uses. Find your ram unit, driver, and platen below to remove the displacement pump. Refer to your displacement pump manual to repair the displacement pump.

If the driver does not require servicing, leave it attached to its mounting. If the driver does need to be removed, see **Remove Driver** on page 33.

D200 3 in. and D200s 6.5 in. Supply Units

1. Follow the **Pressure Relief Procedure** on page 22.
2. Turn the disconnect switch (M) to OFF.
3. See **Disconnect Displacement Pump** in your pump package manual.
4. Open the main air slider valve (AA).
5. Raise the driver:
 - a. Loosen nut (105a) under ram bar and thread it down the threaded rod (106) to the lift ring adapter (107) holding the driver. Use wrench on nut (105) on top of ram bar to raise driver.

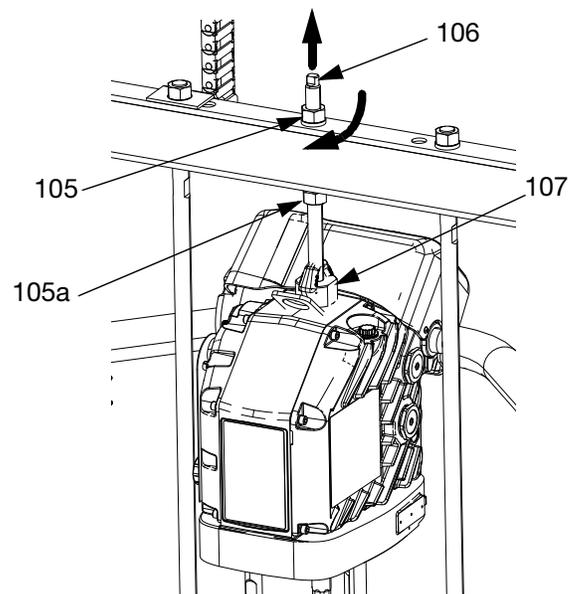


FIG. 24

- b. For driver with smaller platens and all supply units: See procedure for **D60 3 in. Dual Post Supply Units** on page 32.
6. See **Disconnect Pump from Platen** on page 30 to disconnect the platen from the displacement pump.
7. Use two people to lift out the displacement pump.

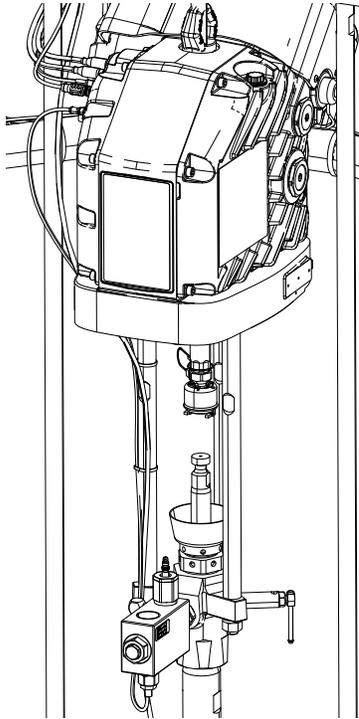


FIG. 25

D60 3 in. Dual Post Supply Units

1. Follow the **Pressure Relief Procedure** on page 22.
2. Turn the disconnect switch (M) to OFF.
3. See **Disconnect Displacement Pump** in your pump packages manual.
4. See **Disconnect Pump from Platen** on page 30 to disconnect the platen from the displacement pump.
5. Open the main air slider valve (AA).
6. Raise the ram assembly to lift the driver away from the displacement pump.
7. Remove displacement pump and service as needed.

Install Displacement Pump

D200 3 in. and D200s 6.5 in. Supply Units

1. Insert displacement pump on platen. Follow **Connect Platen** steps on page 31.
2. See **Reconnect Displacement Pump** in your pump package manual.
3. Connect driver:
 - a. Use wrench on nut (105) on top of ram bar to lower driver onto displacement pump. See FIG. 24 on page 31. Thread nut (105) up and tighten it under ram bar. Tighten nut (105) below the crossbar to 25 ft-lb (34 N•m) maximum.

D60 3 in. Dual Post Supply Units

1. Raise ram to install displacement pump to platen.
2. Insert displacement pump on platen. Follow **Connect Platen** steps on page 31.
3. See **Reconnect Displacement Pump** in your pump packages manual.

Remove Driver

| | | | | |
|---|---|---|---|---|
|  |  |  |  |  |
| <p>To avoid serious injury when installing and removing the driver, make sure the driver is supported at all times.</p> | | | | |

1. Follow the **Pressure Relief Procedure** on page 22.
2. Turn the disconnect switch (M) OFF.
3. See **Disconnect Displacement Pump** in your pump package manual.
4. Disconnect power from the driver:
 - a. Remove the driver housing cover (HC).
 - b. Disconnect the wires inside the driver housing.
 - c. Loosen the cord grip (CG).
 - d. Remove wires from driver housing by pulling them through the cord grip (CG).
 - e. Disconnect the cables connected to ports 1-6 on the side of the driver, shown in FIG. 27.

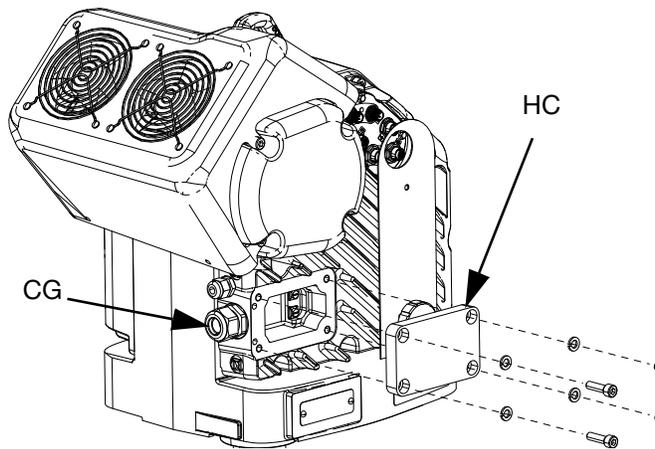


FIG. 26

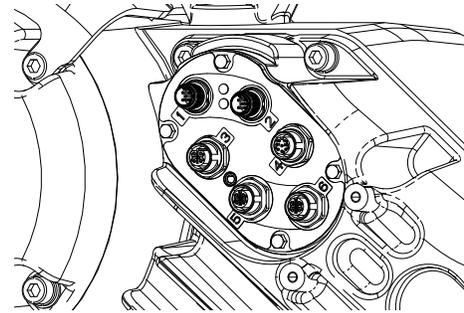


FIG. 27

5. Disconnect driver:
 - a. *D200 3 in. and D200s 6.5 in. supply units:* Loosen nut (125) below crossbar. Use wrench to hold lift ring adapter (127) in place and loosen threaded rod (126) above crossbar with another wrench. See FIG. 28.

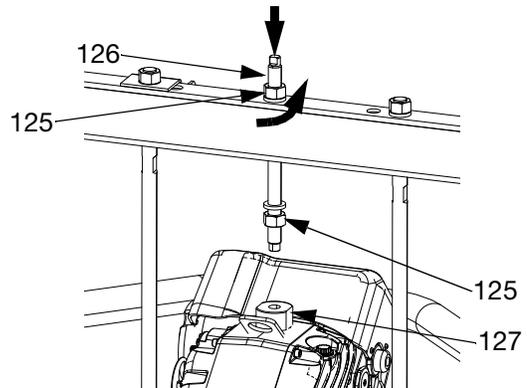


FIG. 28: 55 Gallon Platen

- b. *D60 3 in. supply units:* Remove screws (255) and washers (256) from mounting plate (259). Using a secure hoist, lift the driver from the mounting plate (259). See FIG. 29.


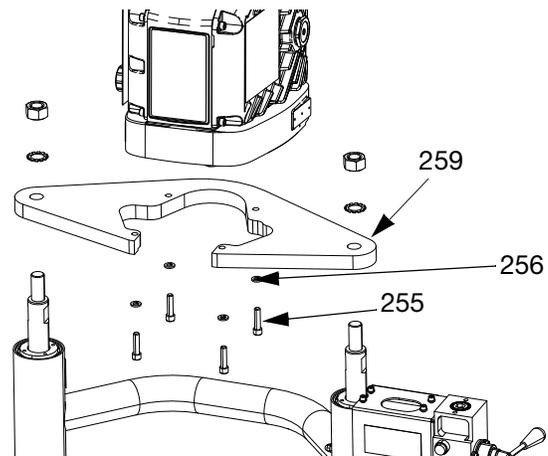


FIG. 29: D60 with Ram

Install Driver

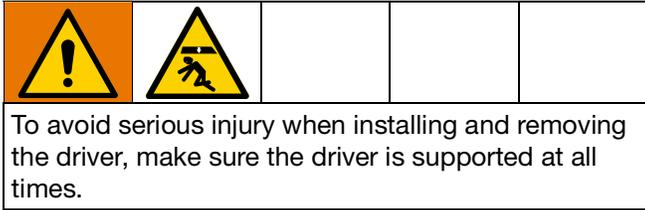

D200 3 in. and D200s 6.5 in. Supply Units

55 gallon platen:

1. Using a capable hoist, insert tie rods into displacement pump and secure driver to pump.
 - a. See **Reconnect Displacement Pump** in your pump package manual.
 - b. Install threaded rod (126) through center hole in the crossbar. Install lock washers (124) and nuts (125) onto threaded rod (126), both above and below crossbar. Use wrench to hold lift ring adapter (127) and tighten threaded rod (106) into lift ring adapter (127) using another wrench. See FIG. 30.
 - c. Tighten nut (125) below crossbar to 25 ft-lb (34 N•m) maximum.
 - d. Tighten nut (125) above crossbar to lock driver in place.

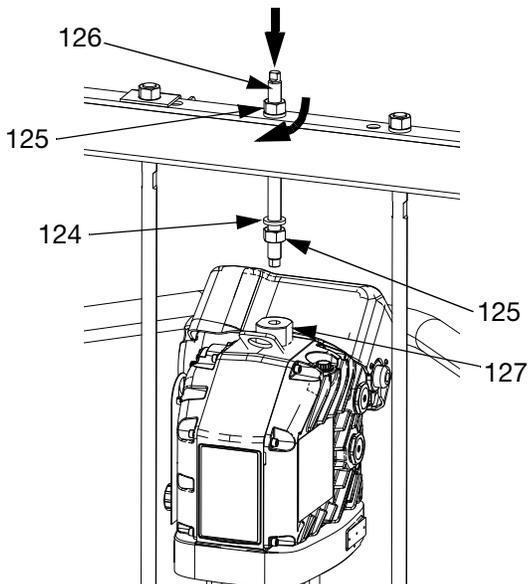


FIG. 30

2. Connect power to the driver. Follow a-e of step 4 on page 33 in reverse.
3. Turn the disconnect switch (M) ON.

D60 3 in. Dual Post Supply Unit

1. Using a secure hoist, attach driver to mounting plate (259) with screws (255) and washers (256). See FIG. 29 on page 33.
2. See **Reconnect Displacement Pump** in your pump package manual.
3. Connect power to the driver. Follow a-e of step 4 on page 33 in reverse.


Supply Unit Repair

NOTE: For repair of D60, D200, and D200s rams see manual 334198. See **Related Manuals** page 3.

Parts

D200s 6.5 in. Supply Units

Model 25E201 Shown

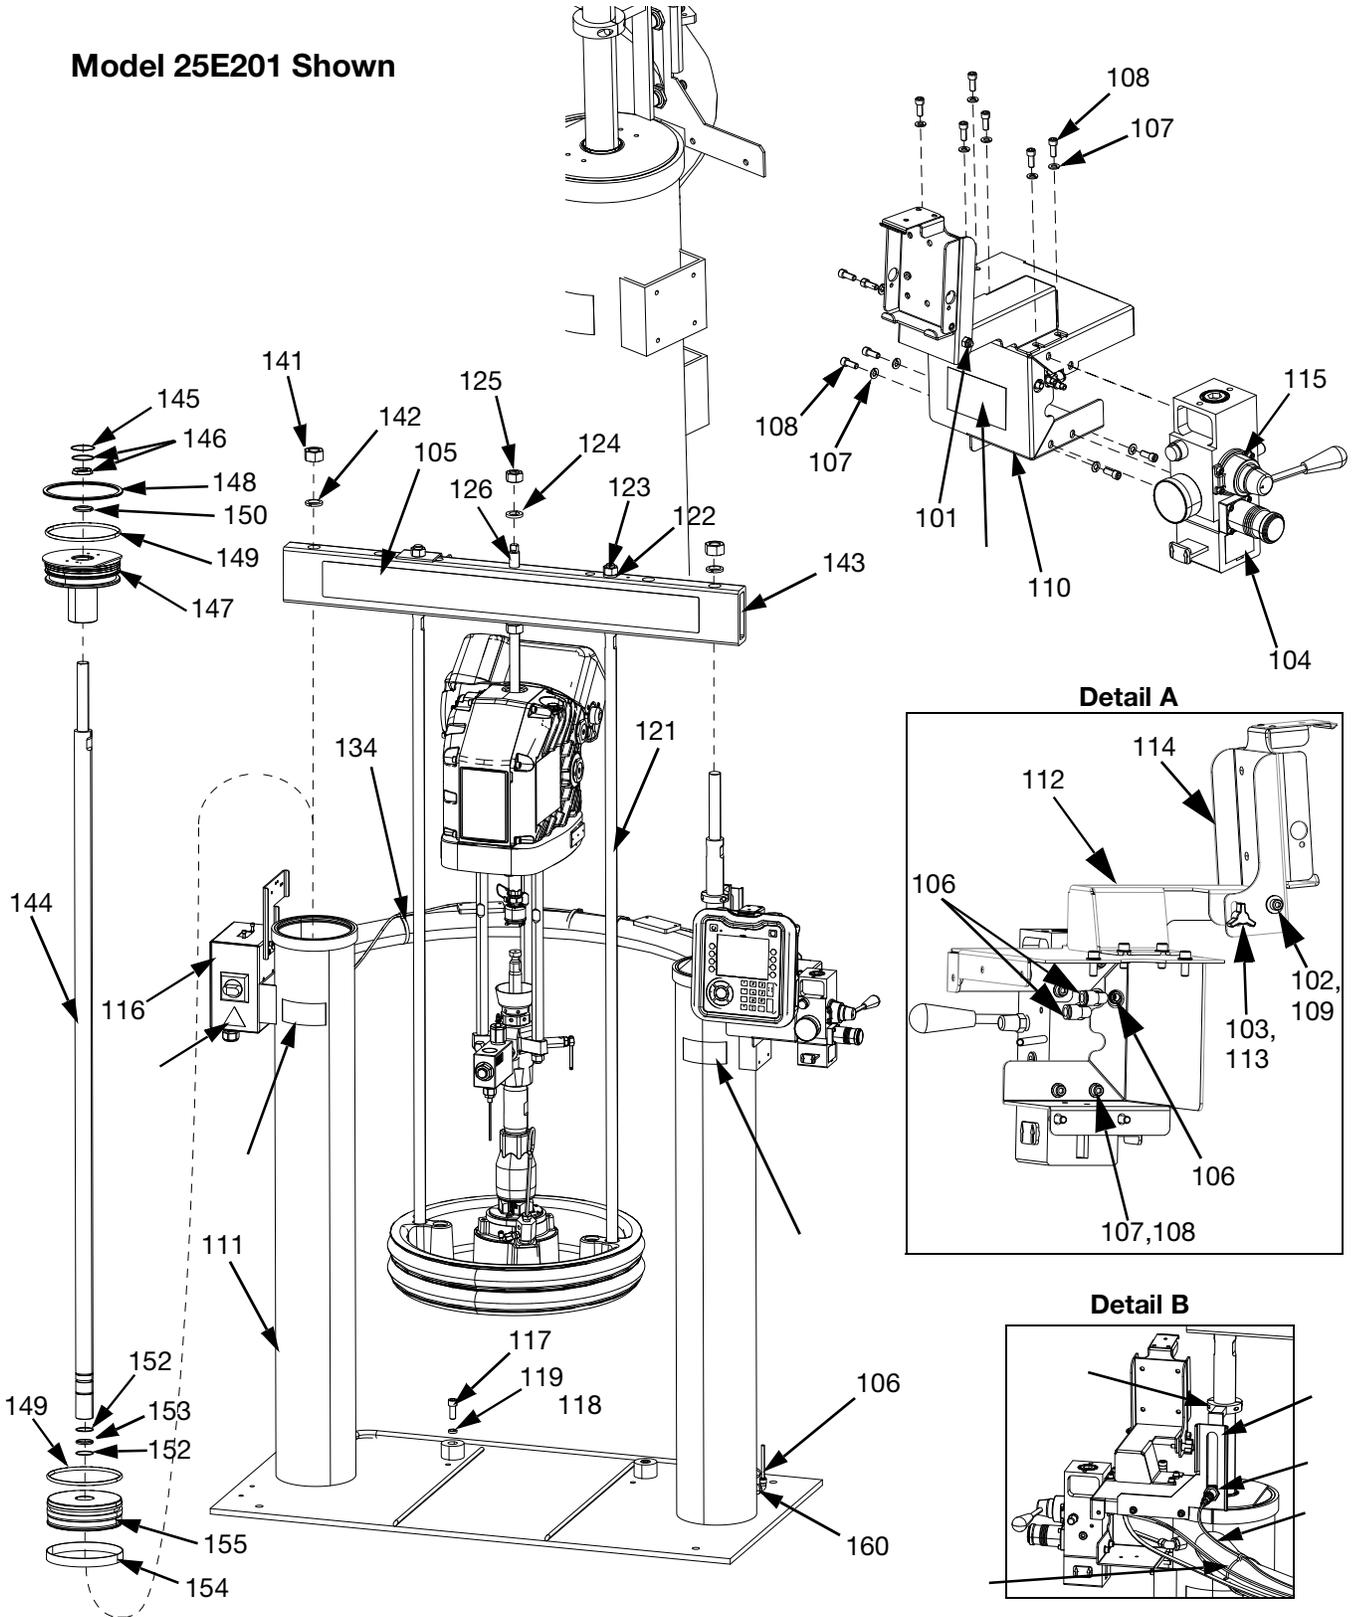

D200s 6.5 in. Supply Units, 25E201

| Ref. | Part | Description | Qty. |
|------|--------|--|------|
| 101 | 102040 | NUT, lock, hex | 1 |
| 102 | 110755 | WASHER, plain | 1 |
| 103 | 117017 | WASHER | 1 |
| 104 | 15V954 | LABEL, valve, shutoff, air control | 1 |
| 105 | 16W583 | LABEL, cross bar | 1 |
| 106 | C12509 | TUBE, nylon, rnd | 15 |
| 107 | 100016 | WASHER, lock | 15 |
| 108 | 121112 | SCREW, cap, socket head | 15 |
| 109 | 121250 | SCREW, shch | 1 |
| 110 | 15T446 | BRACKET, mounting, painted | 1 |
| 111 | 255438 | RAM, 6.5 in. | 1 |
| 112 | 255633 | BRACKET, pendant pivot, painted | 1 |
| 113 | 121253 | KNOB, display adj., ram pkgs | 1 |
| 114 | 255639 | BRACKET, mounting, assembly | 1 |
| 115 | 24C264 | CONTROL, air, ram, hyd driver | 1 |
| 116 | 25E207 | JUNCTION BOX, ram mounted, e-drive | 1 |
| 117 | C19853 | SCREW, cap, socket hd | 2 |
| 118 | C32467 | STOP, drum | 2 |
| 119 | C38185 | WASHER, lock | 2 |
| 120* | 070408 | SEALANT, pipe, sst | 1 |
| 121 | 15M531 | ROD, follower | 2 |
| 122 | 101015 | WASHER, lock | 2 |
| 123 | C19187 | NUT, nex | 2 |
| 124 | 101533 | WASHER, spring lock | 2 |
| 125 | 101535 | NUT, full hex | 2 |
| 126 | 15J992 | ROD, threaded | 1 |
| 127* | 15J991 | ADAPTER, lift ring | 1 |
| 128* | 15J993 | RING, lift, plate | 1 |
| 129* | 073028 | LUBRICANT, anti-seize | 1 |
| 130 | 130787 | SENSOR, barrel, m18 x 1, pnp, nc PKG | 1 |
| 131 | 123656 | CABLE, spin, male/female | 1 |
| 132 | 24D006 | ACTUATOR, sensor, low/empty, wmmllt, pt | 1 |
| 133 | 17Y704 | BRACKET, lvl sensor, dual, PKG | 1 |
| 134 | 114958 | STRAP, tie | 7 |
| 135▲ | 196548 | LABEL, caution (Junction Box) | 1 |
| 136▲ | 15J074 | LABEL, safety, crush & pinch | 4 |
| 141 | 113939 | NUT, jam, hex | 2 |
| 142 | 113933 | WASHER, lock, helical | 2 |
| 143 | 15M538 | BEAM, tie, 6.5 in. ram | 1 |
| 144 | C32401 | ROD | 2 |
| 145* | C03043 | RING, snap | 2 |
| 146* | C31001 | WIPER, rod | 2 |
| 147 | 25T845 | SLEEVE, guide | 2 |
| 148* | C32409 | RING, retaining | 2 |
| 149* | C38132 | PACKING, o-ring | 4 |
| 150* | C02073 | PACKING, quad ring | 2 |
| 152* | C20417 | RING, retaining | 4 |
| 153* | 158776 | PACKING, o-ring | 2 |
| 154* | C32408 | BAND, guide | 2 |
| 155 | C32405 | PISTON, elevator air | 2 |
| 157* | 100040 | PLUG, pipe | 2 |
| 160 | 114153 | FITTING, elbow, male, swivel | 2 |


▲ Replacement safety labels, tags, and cards are available at no cost.

* Parts included in Supply Units Repair Kit 918432 (purchase separately).

* Not shown.

D200 3 in. Supply Units

Model 25E200 Shown

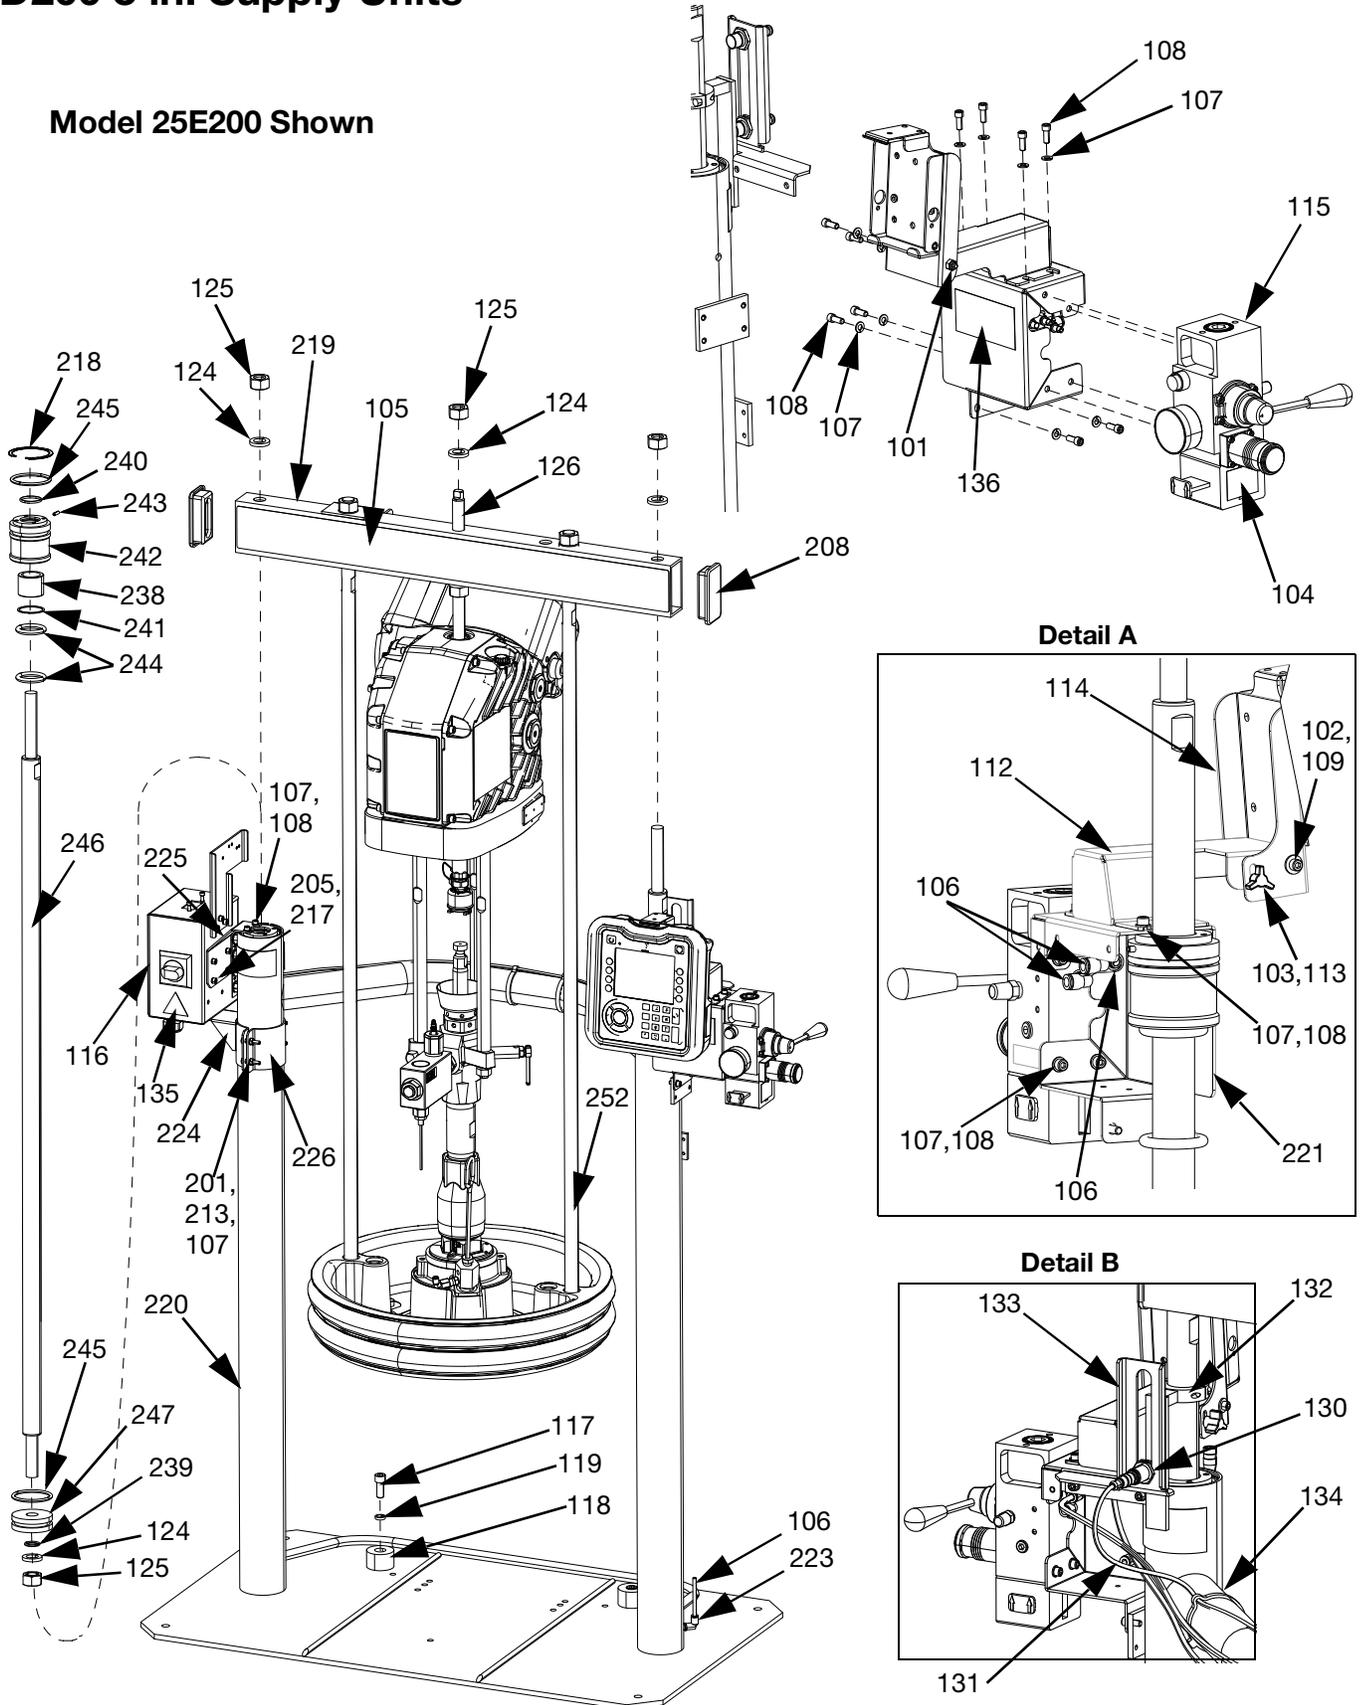

D200 3 in. Supply Units, 25E200

| Ref. | Part | Description | Qty. | Ref. | Part | Description | Qty. |
|------|--------|---|------|------|--------|-------------------------------|------|
| 101 | 102040 | NUT, lock, hex | 1 | 201 | 100014 | SCREW, cap, hex hd | 4 |
| 102 | 110755 | WASHER, plain | 1 | 205 | 108050 | WASHER, lock, spring | 6 |
| 103 | 117017 | WASHER | 1 | 208 | 189559 | CAP, end | 2 |
| 104 | 15V954 | LABEL, valve, shutoff, air control | 1 | 213 | 100015 | NUT, hex mscr | 4 |
| 105 | 16W583 | LABEL, cross bar | 1 | 217 | 121518 | SCREW, cap, shc | 6 |
| 106 | C12509 | TUBE, nylon, rnd | 15 | 218* | 127510 | RING, retaining, internal | 2 |
| 107 | 100016 | WASHER, lock | 16 | 219 | 167646 | BEAM, tie | 1 |
| 108 | 121112 | SCREW, cap, socket head | 12 | 220 | 255286 | RAM, weldment, 3" | 1 |
| 109 | 121250 | SCREW, shcs | 1 | 221 | 255296 | BRACKET, mounted, painted | 1 |
| 112 | 255633 | BRACKET, pendant pivot, painted | 1 | 223 | 128863 | FITTING, elbow | 2 |
| 113 | 121253 | KNOB, display adj., ram pkgs | 1 | 224 | 15W703 | BRACKET, mounting, btm | 1 |
| | 255639 | BRACKET, mounting, assembly | 1 | 225 | 16A314 | BRACKET, mounting, acc. box | 1 |
| 115 | 24C264 | CONTROL, air, ram, hyd driver | 1 | 226 | 16A566 | BRACKET, mounting, ram | 1 |
| 116 | 25E207 | JUNCTION BOX, ram mounted, e-drive | 1 | 234✘ | 070303 | LUBRICANT, grease | 1 |
| 117 | C19853 | SCREW, cap, socket hd | 2 | 235✘ | 073021 | LUBRICANT, oil | 1 |
| 118 | C32467 | STOP, drum | 2 | 237✘ | 070615 | SEALANT, thread, med strength | 1 |
| 119 | C38185 | WASHER, lock | 2 | 238* | 121259 | BEARING, ram end cap | 1 |
| 120✘ | 070408 | SEALANT, pipe, sst | 1 | 239* | 156401 | PACKING, o-ring | 1 |
| 124* | 101533 | WASHER, spring lock | 6 | 240* | 156698 | PACKING, o-ring | 1 |
| 125* | 101535 | NUT, full hex | 6 | 241* | 15F453 | RETAINER, retaining ring | 1 |
| 126 | 15J992 | ROD, threaded | 1 | 242 | 15M295 | BEARING, ram end cap | 1 |
| 127✘ | 15J991 | ADAPTER, lift ring | 1 | 243 | 15U979 | PIN, spring, straight | 1 |
| 128✘ | 15J993 | RING, lift, plate | 1 | 244* | 160138 | SPRING, compression | 1 |
| 129✘ | 073028 | LUBRICANT, anti-seize | 1 | 245* | 160258 | PACKING, o-ring, buna-n | 2 |
| 130 | 130787 | SENSOR, barrel, m18 x 1, pnp, nc PKG | 1 | 246 | 167651 | ROD, piston ram | 1 |
| 131 | 123656 | CABLE, spin, male/female | 1 | 247 | 183943 | PISTON | 1 |
| 132 | 255381 | ACTUATOR, sensor, low/empty, painted | 1 | 251✘ | C20987 | PACKING, o-ring | 1 |
| 133 | 17Y702 | BRACKET, lvl sensor, dual, d200, PKG | 1 | 252 | 167652 | ROD, tie ram | 2 |
| 134 | 114958 | STRAP, tie | 7 | | | | |
| 135▲ | 196548 | LABEL, caution (Junction Box) | 1 | | | | |
| 136▲ | 15J074 | LABEL, safety, crush & pinch | 4 | | | | |


▲ Replacement safety labels, tags, and cards are available at no cost.

* Parts included in Supply Units Repair Kit 255687 (purchase separately).

✘ Not shown.

D60 3 in. Supply Units

Model 25E199 Shown

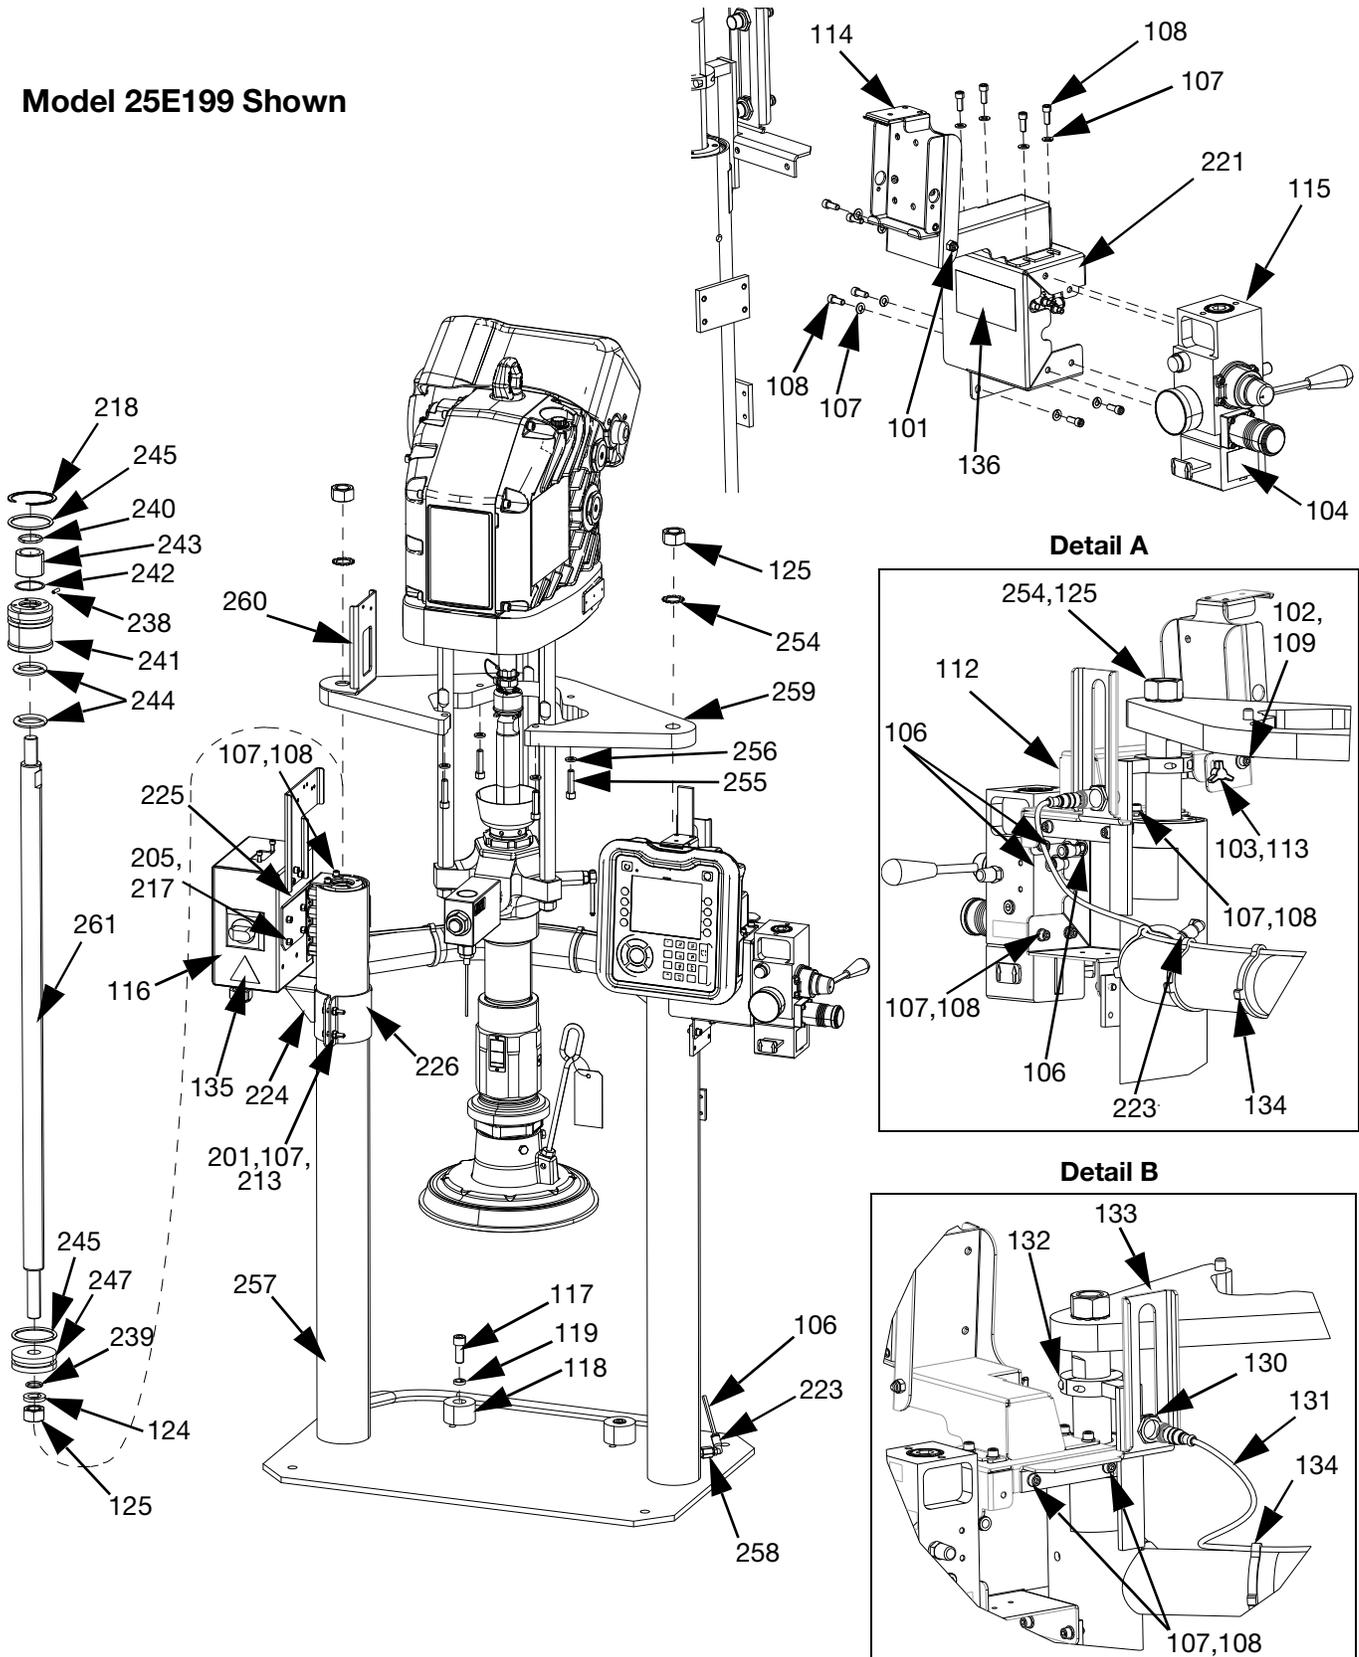

D60 3 in. Supply Units, 25E199

| Ref. | Part | Description | Qty. | Ref. | Part | Description | Qty. |
|------|----------|--|------|------|--------|--------------------------------------|------|
| 101 | 102040 | NUT, lock, hex | 1 | 218* | 127510 | RING, retaining, internal | 2 |
| 102 | 110755 | WASHER, plain | 1 | 221 | 255296 | BRACKET, mounted, painted | 1 |
| 103 | 117017 | WASHER | 1 | 223 | 128863 | FITTING, elbow | 2 |
| 104 | 15V954 | LABEL, valve, shutoff, air control | 1 | 224 | 15W703 | BRACKET, mounting, btm | 1 |
| 106 | C12509 | TUBE, nylon, rnd | 2 | 225 | 16A314 | BRACKET, mounting, acc. box | 1 |
| 107 | 100016 | WASHER, lock | 18 | 226 | 16A566 | BRACKET, mounting, ram | 1 |
| 108 | 121112 | SCREW, cap, socket head | 14 | 234✘ | 070303 | LUBRICANT, grease | 1 |
| 109 | 121250 | SCREW, shch | 1 | 235✘ | 073021 | LUBRICANT, oil | 1 |
| 112 | 255633 | BRACKET, pendant pivot, painted | 1 | 237✘ | 070615 | SEALANT, thread, med strength | 1 |
| 113 | 121253 | KNOB, display adj., ram pkgs | 1 | 238* | 121259 | BEARING, ram end cap | 1 |
| 114 | 255639 | BRACKET, mounting, assembly | 1 | 239* | 156401 | PACKING, o-ring | 1 |
| 115 | 24C264 | CONTROL, air, ram, hyd driver | 1 | 240* | 156698 | PACKING, o-ring | 1 |
| 116 | 25E207 | JUNCTION BOX, ram mounted, E-drive | 1 | 241* | 15F453 | RETAINER, retaining ring | 1 |
| 117 | C19853 | SCREW, cap, socket hd | 2 | 242 | 15M295 | BEARING, ram end cap | 1 |
| 118 | C32467 | STOP, drum | 2 | 243 | 15U979 | PIN, spring, straight | 1 |
| 119 | C38185 | WASHER, lock | 2 | 244* | 160138 | SPRING, compression | 1 |
| 120✘ | 070408 | SEALANT, pipe, sst | 1 | 245* | 160258 | PACKING, o-ring, buna-n | 2 |
| 124* | 101533 | WASHER, spring lock | 1 | 247 | 183943 | PISTON | 1 |
| 125* | 101535 | NUT, full hex | 3 | 254 | 104395 | WASHER, lock, tooth, external | 2 |
| 130 | 130787P | SENSOR, barrel, m18 x 1, pnp, nc KG | 1 | 255 | 110141 | SCREW, cap, sch | 4 |
| | 123673 | HARNESS | 1 | 256 | 100133 | WASHER, lock, 3/8 | 4 |
| | 255381 | ACTUATOR, sensor, low/empty, painted | 1 | 257 | 256734 | RAM, dp, weldment | 1 |
| 133 | 17Y702 | BRACKET, lvl sensor, dual, D200, PKG pnt | 1 | 258 | 16T421 | ADAPTER, pipe hex | 1 |
| | 114958 | STRAP, tie | 4 | 259 | 17L703 | BRACKET, shelf, D60, 3400/6500 | 1 |
| 135▲ | 196548 | LABEL, caution (Junction Box) | 1 | 260 | 17X806 | BRACKET, cable track, D60 ram PKG | 1 |
| | ▲ 15J074 | LABEL, safety, crush & pinch | 4 | 261 | 15V697 | ROD, piston, dp ram | 1 |
| 201 | 100014 | SCREW, cap, hex hd | 4 | | | | |
| 205 | 108050 | WASHER, lock, spring | 6 | | | | |
| 213 | 100015 | NUT, hex mscr | 4 | | | | |
| 217 | 121518 | SCREW, cap, shc | 6 | | | | |


▲ Replacement safety labels, tags, and cards are available at no cost.

* Parts included in Supply Units Repair Kit 255687 (purchase separately).

✘ Not shown.

D200s and D200 Pump Mounts for 55 Gallon (200 Liter) Platen


Note: See page 35 for kit configuration table.

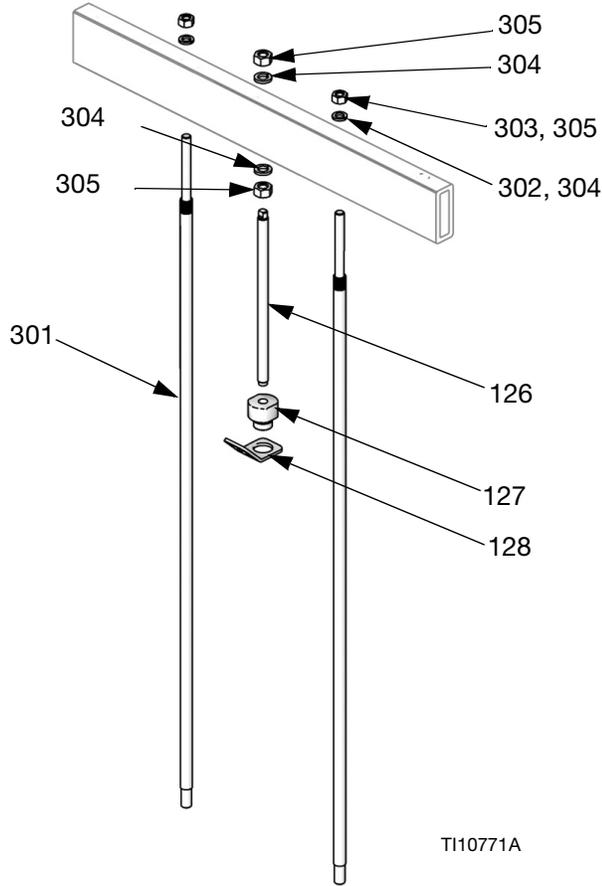

| Ref. | Part | Description | Qty | Ref. | Part | Description | Qty |
|------|------------------|---------------------|-----|--------------|--------|-----------------------------------|-----|
| 301 | 15M531 167652 | ROD, platen | 2 | 128 | 15J993 | RING, lift, plate | 1 |
| 302 | 101015 | WASHER, lock | 2 | 324* | 160327 | FITTING, 3/4 nptf x 3/4 npsm, 90° | 1 |
| 303 | C19187 | NUT, hex | 2 | 325* | C12034 | HOSE, coupled; 72 in. | 1 |
| 304 | 101533 | WASHER, spring lock | 2 | 326* | 552071 | SLEEVE, protective, 6 ft | 1 |
| 305 | 101535 | NUT, full hex | 2 | 327* | 105281 | FITTING, 3.4 nptf x 3/4 npsm, 45° | 1 |
| 126 | 15J992 | ROD, threaded | 1 | * Not shown. | | | |
| 127 | 15J991 | ADAPTER, lift, ring | 1 | | | | |

D60 Pump Mount 257624 for 5 Gallon (20 Liter) Platen

Note: See page 35 for kit configuration table.

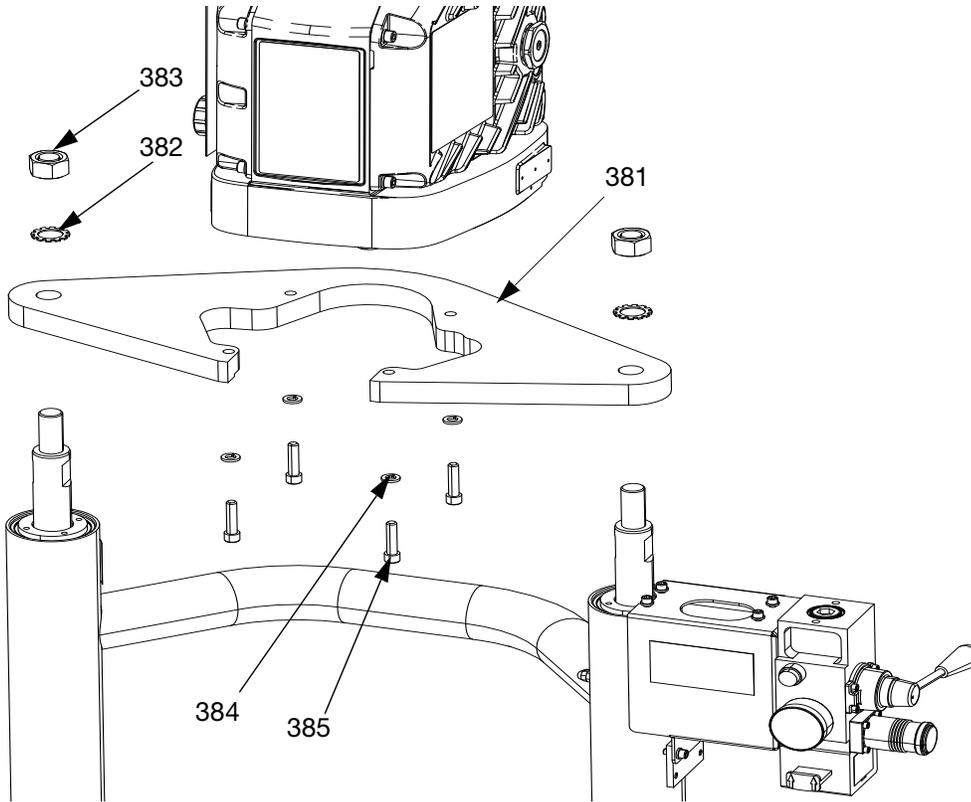






| Ref. Part | Description | Qty. | |
|-----------|--|------|--------------------|
| 381 | BRACKET, shelf, NXT3400 and NXT6500 | 1 | * For 257624 only. |
| 382 | 101533 WASHER, spring lock | 2 | * Not shown. |
| 383 | 101535 NUT, hex | 2 | |
| 384 | 100133 WASHER, lock | 4 | |
| 385 | C38372 SCREW, cap, hex head | 4 | |
| 388* | SLEEVE, protective; 72 in. | 1 | |
| 389* | STRAP, tie | 2 | |
| 390* | HOLDER, cable tie, rotating | 2 | |
| 391* | 160327 FITTING, 3/4 nptf x 3/4 npsm, 90° | 1 | |

Transformer

6.5 in. Ram Transformer Kit 25E202

3 in. Ram Transformer Kit 25E203

1 ⚠ Tighten u-bolt nuts until lock washers are flattened. Over-tightening may damage ram cylinder.

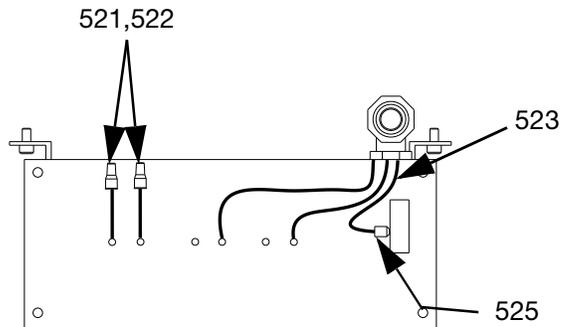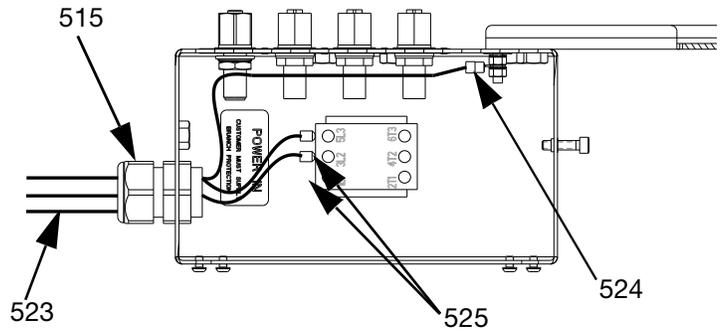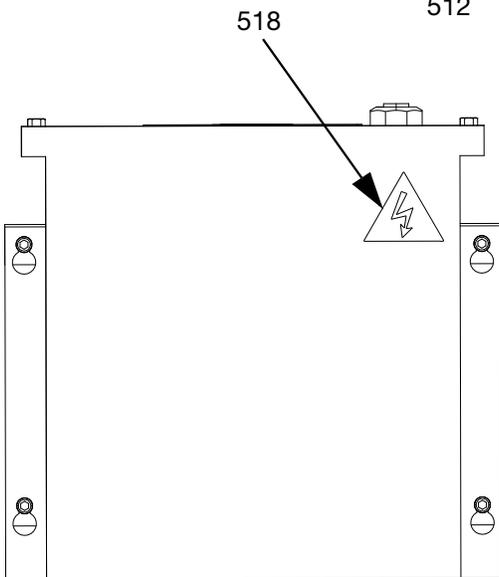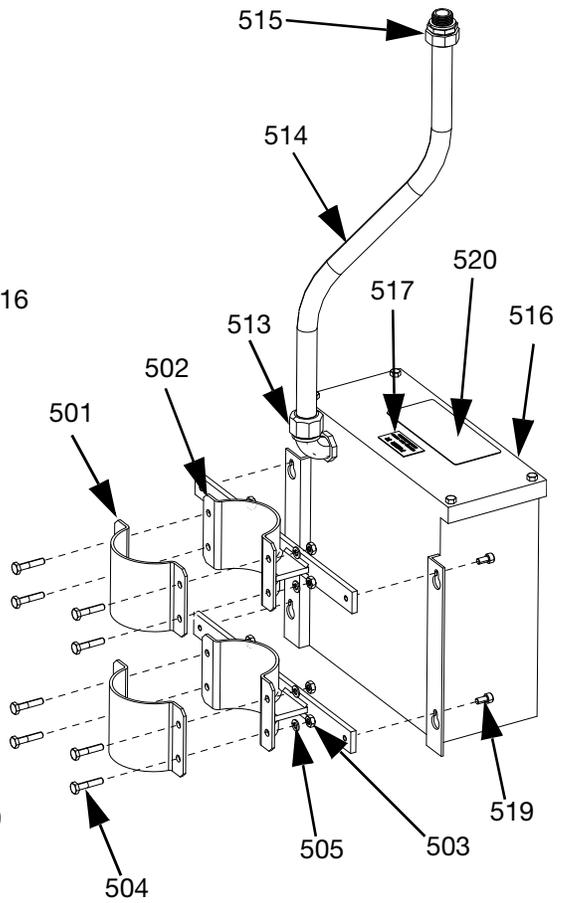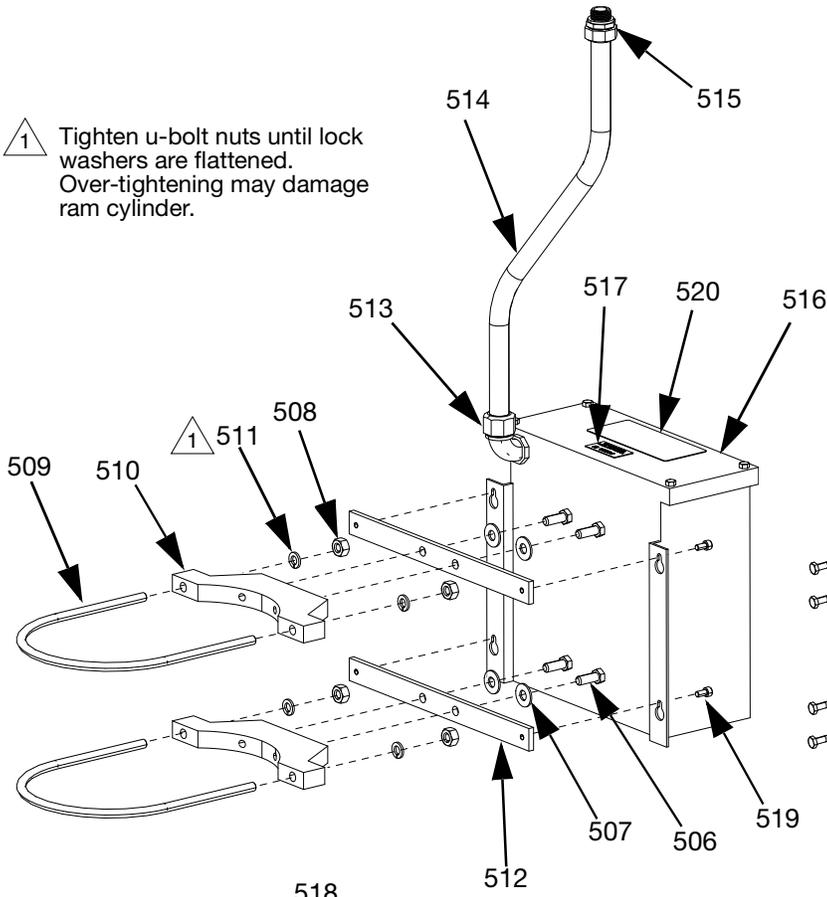

Transformer Parts


| Ref. | Part | Description | Qty. |
|-------------|-------------|---|-------------|
| 501* | 16A566 | BRACKET, mounting, ram, 3 in. | 2 |
| 502* | 17X839PKG | BRACKET, mounting, xformer, 3 in. ram, painted | 2 |
| 503* | 100015 | NUT, hex mscr | 8 |
| 504* | 100014 | SCREW, cap, hex hd | 8 |
| 505* | 100016 | WASHER, lock | 8 |
| 506** | 100101 | SCREW, cap, hex hd | 4 |
| 507** | C19200 | WASHER, plain | 4 |
| 508** | 100131 | NUT, full hex | 4 |
| 509** | C32424 | BOLT, u, 7 in. | 2 |
| 510** | 617395 | CLAMP, saddle | 2 |
| 511** | 100133 | WASHER, lock, 3/8 | 8 |
| 512** | 17X836 | BAR, xformer mounting, 6 in. ram, painted | 1 |
| 513 | 17D989 | CONNECTOR, conduit, liquid-tight | 1 |
| 514 | 120800 | CONDUIT, 1/2 | 1 |
| 515 | 17D987 | CONNECTOR, conduit, liquid-tight | 1 |
| 516 | 129626 | TRANSFORMER, 480V | 1 |
| 517 | 16K918 | LABEL, power in, branch circuit | 1 |
| 518 | 196548 | LABEL, caution | 1 |
| 519 | 107530 | SCREW, cap, sch, hex | 4 |
| 520▲ | 25E178 | LABEL, safety, danger | 1 |
| 521 | 124436 | CONNECTOR, splice, wire | 2 |
| 522 | 124437 | CAP, splice, wire | 2 |
| 523 | 065388 | WIRE, copper, electric | 1 |
| 524 | 124443 | TERMINAL, ring, insulated, 1/4 | 1 |
| 525 | 127667 | FERRULE | 2 |

* *Parts only included in kit 25E202.*

** *Parts only included in kit 25E203.*

▲ *Replacement safety labels, tags, and cards are available at no cost.*

Cable Track

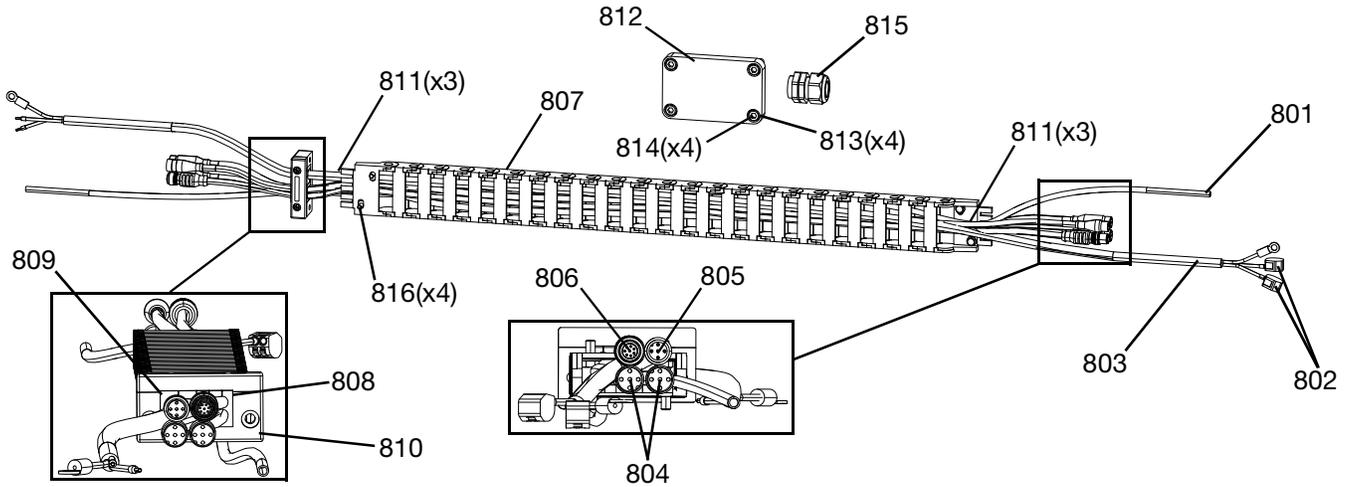


Cable Tracks, 25E346, 25E347, and 25E348


| Ref. | Part | Description | Quantity | | |
|------|-----------|--------------------------------------|----------|---------|---------|
| | | | 25E346 | 25E347 | 25E348 |
| 801 | C12509 | TUBE, nylon, rnd | 14 ft | 15.5 ft | 17.5 ft |
| 802 | 128986 | CONNECTOR, 2 conductor, leverlock | 2 | 2 | 2 |
| 803 | 131795 | CORD, power, d60 | 1 | | |
| | 131796 | CORD, power, d200 | | 1 | |
| | 131797 | CORD, power, d200s | | | 1 |
| 804 | 121003 | CABLE, can, female / female 3.0 m | 2 | 2 | 2 |
| 805 | 124415 | CABLE, 5pin, mf, 3.0 m, molded | 1 | 1 | 1 |
| 806 | 125183 | CABLE, m12, 8 pin, mf, 2.5 m, molded | 1 | 1 | |
| | 15Y051 | CABLE, m12, 8 pin, mf, 3.0 m, molded | | | 1 |
| 807 | 17X897PKG | CABLE, track, igus, d60, e-drive | 1 | 1 | 1 |
| 808 | 128177 | INSERT, rubber, cord grip, 4 x 6 mm | 1 | 1 | 1 |
| 809 | 128397 | INSERT, rubber, cord grip, 9-10 mm | 1 | 1 | 1 |
| 810 | 131664PKG | FRAME, cord grip, 2-position | 1 | 1 | 1 |
| 811 | C38321 | TIE, cable, 3.62 lg | 6 | 6 | 6 |
| 812 | 17Y316PKG | COVER, disconnect, painted | 1 | 1 | 1 |
| 813 | 104572 | WASHER, lock spring | 4 | 4 | 4 |
| 814 | 109114 | SCREW, cap, sch | 4 | 4 | 4 |
| 815 | 121171 | GRIP, cord, .35-.63, 3/4 | 1 | 1 | 1 |
| 816 | 128670 | BOLT, flange hd, serrated, m5, sst | 4 | 4 | 4 |

55 Gallon Platen

200 Liter (55 Gallon) Platen, 255662, 255663, and 255664

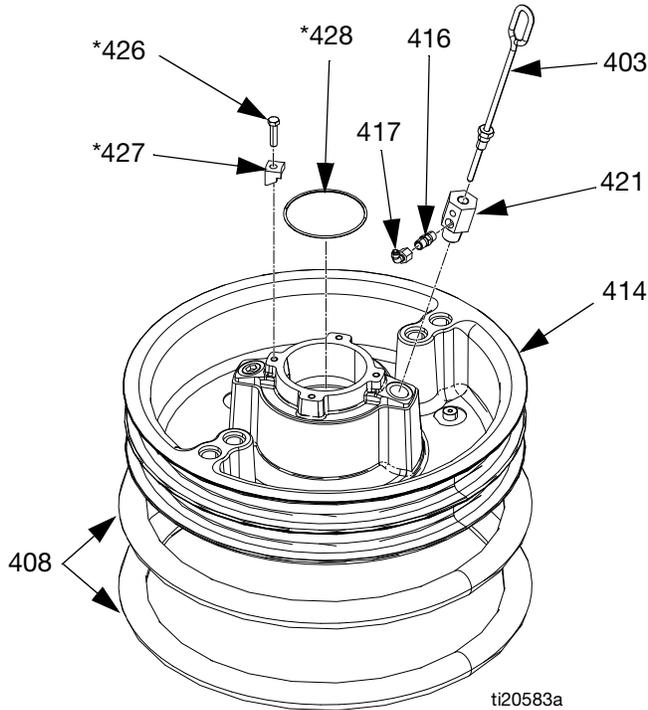

200 Liter (55 Gallon) Platen with EPDM Hose Wipers, 24Y343

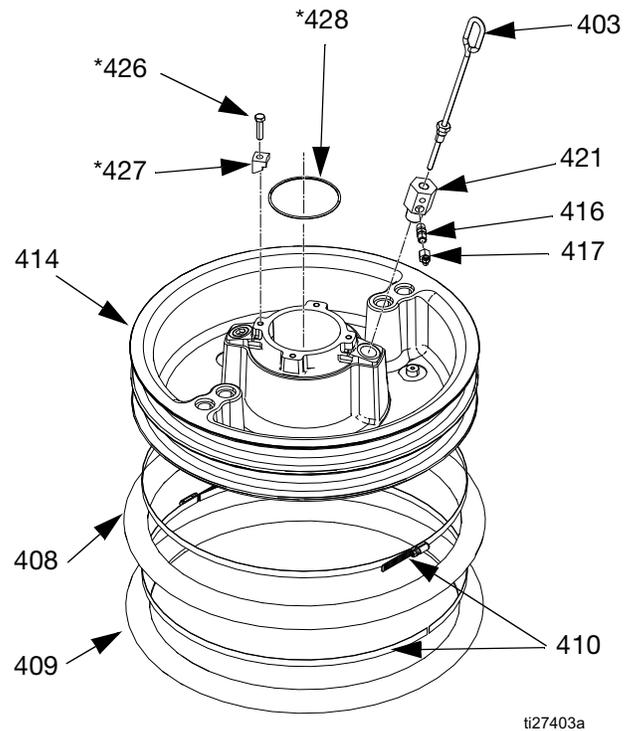

200 Liter (55 Gallon) Platen Parts

| Ref. | Part | Description | Qty. |
|-------|--------|---|------|
| 403 | 257697 | HANDLE, bleed assy | 1 |
| 408◆ | 255652 | SEAL, wiper, drum, 55 gal., neo-prene; for 255664 only. | 2 |
| | 255653 | SEAL, wiper, drum, 55 gal., EPDM; for 255663 and 255662 only. | 2 |
| 414 | | PLATE, ram 55 gal., for 255664 and 255663 only. | 1 |
| | | PLATE, ram 55 gal., PTFE | 1 |
| 416 | 122056 | VALVE, check, 1/4, for 255662 and 255663 only | 1 |
| | 501867 | VALVE, check, 5/8, for 255664 only | 1 |
| 417 | 17E556 | FITTING, PTC, elbow, 1/4 NPT, 1/4 TUBE | 1 |
| 421 | 15W032 | ADAPTER, for 255663, 255664, and 25N344 | 1 |
| | 16W974 | ADAPTER, for 255662 only | 1 |
| 426*◆ | 102637 | SCREW, cap | 4 |
| 427*◆ | 276025 | CLAMP | 4 |
| 428*◆ | 109495 | O-RING | 1 |

* Parts included in 255392 Kit (purchase separately).

◆ Parts not included with 255662, 663, and 664.

◆ Parts not included with 25N344.

200 Liter (55 Gallon) Platen with EPDM Hose Wipers Parts


| Ref. | Part | Description | Qty. |
|-------|--------|--|------|
| 403 | 257697 | HANDLE, bleed assy | 1 |
| 408† | 17L889 | SEAL, wiper, drum, 55 gal., EPDM | 1 |
| 409† | 162230 | SEAL, wiper, drum, 55 gal., EPDM | 1 |
| 410† | 17B467 | CLAMP, tire | 4 |
| 414 | | PLATE, ram 55 gal. | 1 |
| 416 | 122056 | VALVE, check, 1/4 | 1 |
| 417 | 17E556 | FITTING, PTC, elbow, 1/4 NPT, 1/4 TUBE | 1 |
| 421 | 15W032 | ADAPTER | 1 |
| 426*◆ | 102637 | SCREW, cap | 4 |
| 427* | 276025 | CLAMP | 4 |
| 428* | 109495 | O-RING | 1 |

* Parts included in 255392 Kit (purchase separately).

† Parts included in 25M210 Kit (purchase separately).

◆ Parts not included with 24Y343.

200 Liter (55 Gallon) Platen With EPDM Hose Wipers. Specifically for drums used in Japan (GKK) 26D176

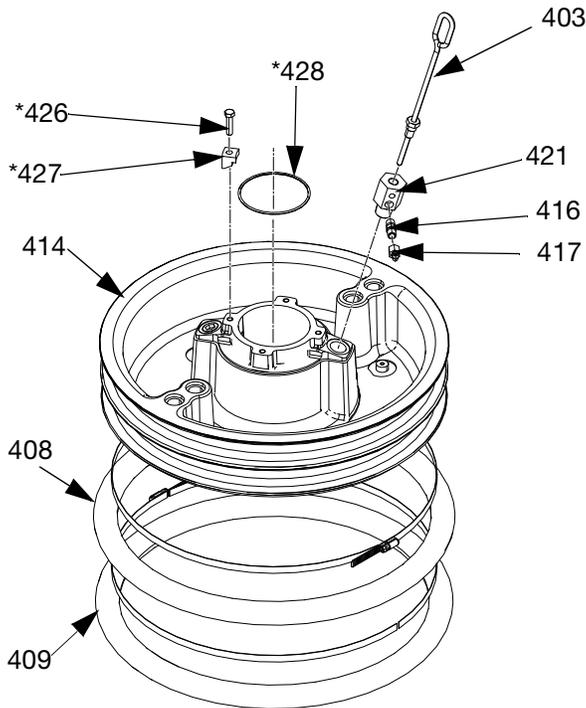

200 Liter (55 Gallon) Platen With EPDM Hose Wiper Parts. Specifically for drums used in Japan (GKK) 26D176.

NOTE: The Japanese drums are smaller in diameter than standard drums.

| Ref. | Part | Description | Qty. |
|-------|--------|--|------|
| 403 | 257697 | HANDLE, bleed assy | 1 |
| 408† | 17L889 | SEAL, wiper, drum, 55 gal., EPDM | 1 |
| 409† | 162230 | SEAL, wiper, drum, 55 gal., EPDM | 1 |
| 410† | 17B467 | CLAMP, tire | 4 |
| 414 | | PLATE, ram 55 gal. | 1 |
| 416 | 122056 | VALVE, check, 1/4 | 1 |
| 417 | 17E556 | FITTING, PTC, elbow, 1/4 NPT, 1/4 TUBE | 1 |
| 421 | 15W032 | ADAPTER | 1 |
| 426*+ | 102637 | SCREW, cap | 4 |
| 427*+ | 276025 | CLAMP | 4 |
| 428*+ | 109495 | O-RING | 1 |
| 403 | 257697 | HANDLE, bleed assy | 1 |
| 408† | 17L889 | SEAL, wiper, drum, 55 gal., EPDM | 1 |

* Parts included in 255392 Kit (purchase separately).
 † Parts included in 25M210 Kit (purchase separately).
 + Parts not included with 26D176.


200 Liter (55 Gallon) Platen Specifically for Drums Used in Japan (GKK), 26D173, 26D174, and 26D175

| Ref. | Part | Description | Qty. |
|------|--------|--|------|
| 421 | 15W032 | ADAPTER, for 26D173, 26D174, and 25N344 | 1 |
| | 16W974 | ADAPTER, for 26D175 only | 1 |
| 426* | 102637 | SCREW, cap | 4 |
| 427* | 276025 | CLAMP | 4 |
| 428* | 109495 | O-RING | 1 |

* Parts included in 255392 Kit (purchase separately).

‡ Parts not included with 26D173, 26D174, and 26D175.

† Seal wiper kits contain two wipers.

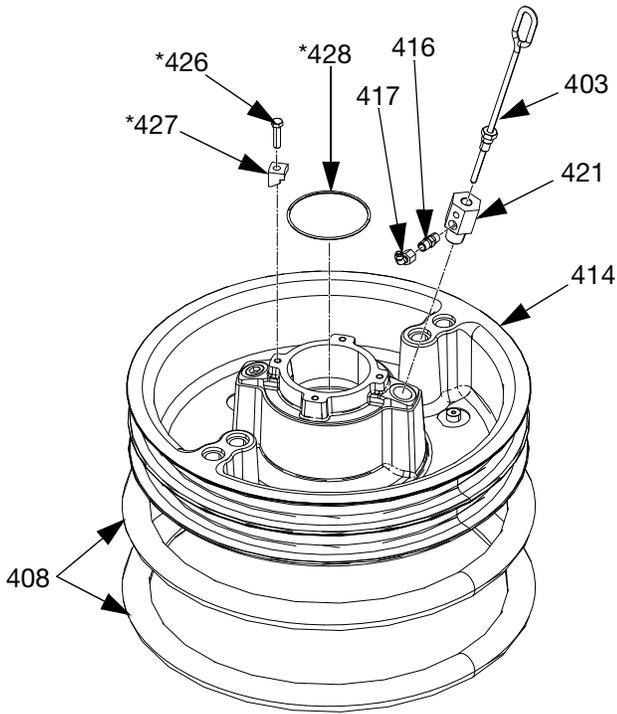

200 Liter (55 Gallon) Platen Specifically for Drums Used in Japan (GKK) 26D173, 26D174, and 26D175 Parts

NOTE: The Japanese drums are smaller in diameter than standard drums.

| Ref. | Part | Description | Qty. |
|------|--------|---|------|
| 403 | 257697 | HANDLE, bleed assy | 1 |
| 408† | 255652 | SEAL, wiper, drum, 55 gal., neo- prene; for 26D173 only. | 2 |
| | 255653 | SEAL, wiper, drum, 55 gal., EPDM; for 26D174 and 26D175 only. | 2 |
| 414 | | PLATE, ram 55 gal., for 26D173 and 26D174 only. | 1 |
| | | PLATE, ram 55 gal., PTFE | 1 |
| 416 | 122056 | VALVE, check, 1/4, for 26D174 and 26D175 only | 1 |
| | 501867 | VALVE, check, 5/8, for 26D173 only | 1 |
| 417 | 17E556 | FITTING, PTC, elbow, 1/4 NPT, 1/4 TUBE | 1 |

20 Liter (5 Gallon), 30 Liter (8 Gallon), and 60 Liter (16 Gallon) Platens

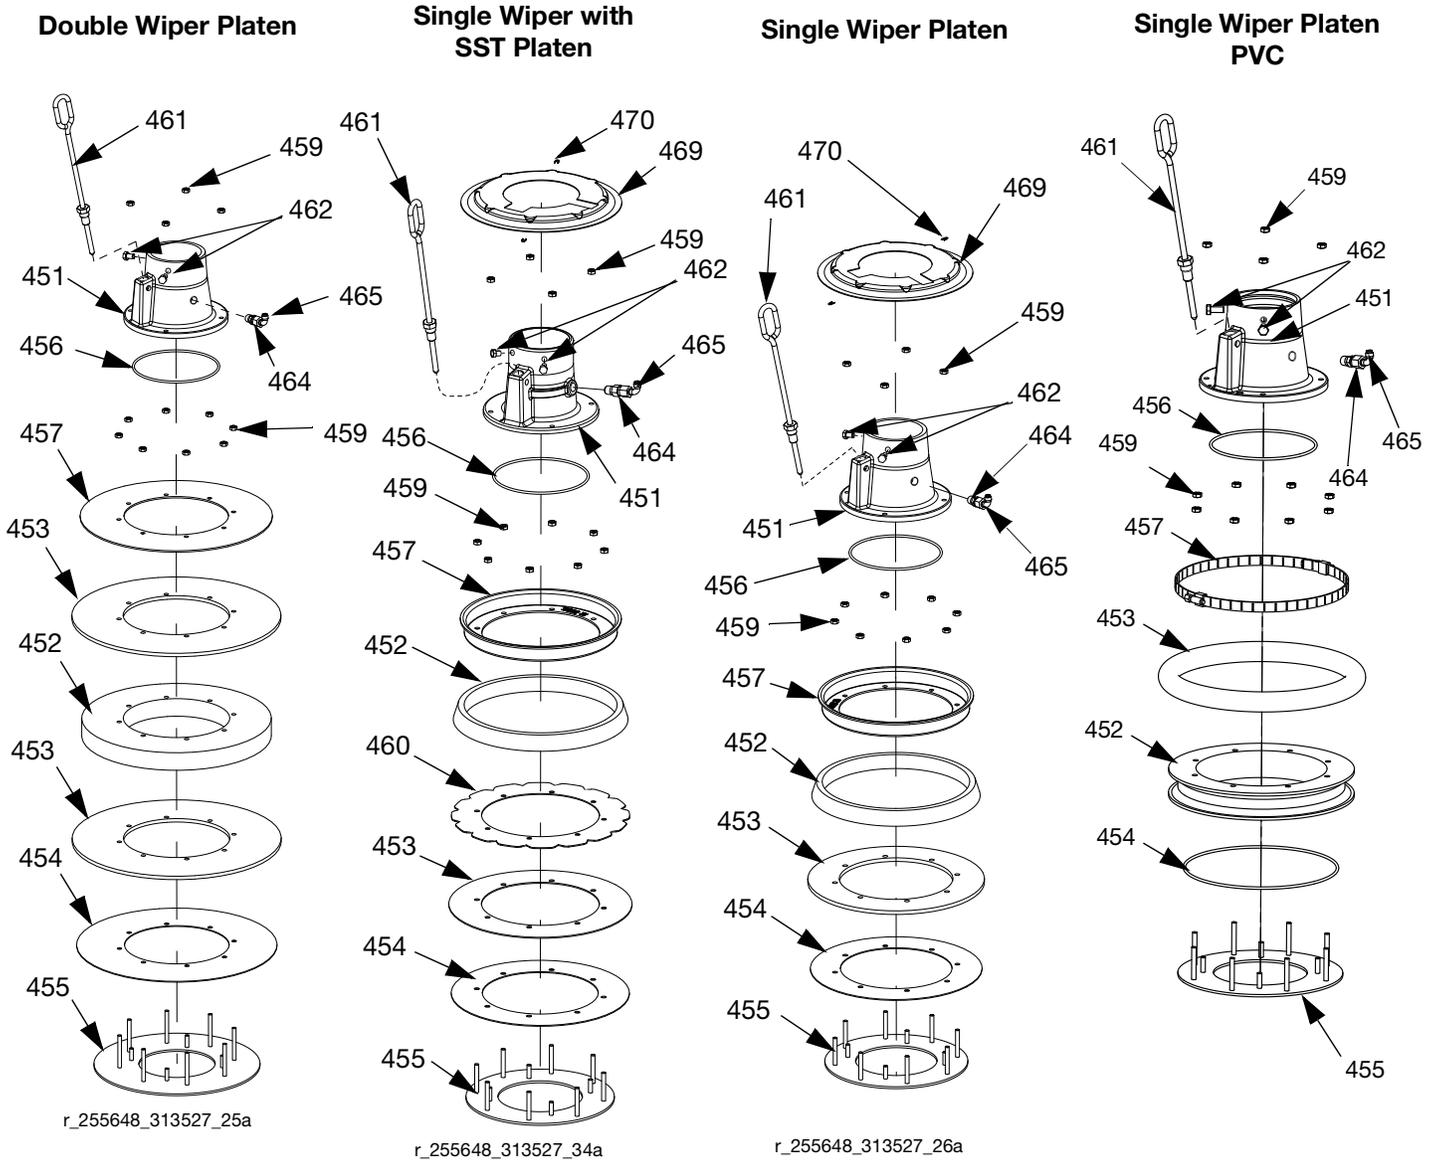


FIG. 31: Single and Double Wiper Assemblies

Platen Descriptions

| Platen | Platen Size | Platen Material | Seal Material | Wiper Assembly Kit |
|---------|---------------------------|-----------------|---------------------------|--------------------|
| 257727☼ | 20 Liter (see page 51) | CS | Nitrile | 257639 |
| 257728☼ | | CS | PolyUrethane | 257640 |
| 257729☼ | | SST | PTFE-coated Nitrile | 257641 |
| 257730* | | CS | Nitrile | 257642 |
| 257731* | | CS | PolyUrethane | 257643 |
| 25A206☼ | | SST | Nitrile (FDA Approved) | 25A207 |
| 25E110☼ | | CS | PVC | 25E111 |
| 257732☼ | 30 Liter (see page 52) | CS | Nitrile | 257644 |
| 257733☼ | | CS | PolyUrethane | 257645 |
| 257734☼ | | SST | PTFE-coated Nitrile | 257646 |
| 257735* | | CS | Nitrile | 257647 |
| 257736* | | CS | PolyUrethane | 257648 |
| 257737☼ | 60 Liter (see page 52) | CS | Nitrile | 257649 |
| 257740☼ | | CS | PolyUrethane | 257650 |
| 257738☼ | | SST | PTFE-coated Nitrile | 257651 |
| 257739* | | CS | Nitrile | 257652 |
| 257741* | | CS | PolyUrethane | 257653 |

☼ *Single wiper*

* *Double wiper*

See page 52-52 for parts.

Common Parts

The parts listed below are common among all 20, 30, and 60 liter platens. Parts that vary are found in the tables on page 52-52.

| Ref. | Part | Description | Qty. |
|------|--------|--|------|
| 456 | 121829 | O-RING | 1 |
| 459 | 555413 | NUT, (For SST platens) | 12 |
| | 113504 | NUT, keps, hex hd (For CSTL platens) | 12 |
| 461 | 257697 | HANDLE, bleed, sst | 1 |
| 463 | 109482 | O-RING; see page 52 | 1 |
| 465 | 17E556 | FITTING, PTC, elbow, 1/4 NPT, 1/4 TUBE | 1 |

Varying Parts - 20 Liter (5 Gallon) Platens

The following table indicates which parts (according to reference number) are included with each platen.

| Ref. | Description | Reference Numbers | | | | | | | Qty: |
|------|--------------------------------|-------------------|--------|--------|------------|------------|--------|------------|-------|
| | | 257727 | 257728 | 257729 | 257730 | 257731 | 25A206 | 25E110 | |
| 451 | BASE | 257665 | 257665 | 257662 | 257665 | 257665 | 257662 | 257665 | 1 |
| 452‡ | SPACER | 276049 | 276049 | 276049 | 257694 | 257694 | 276049 | 17T370 | 1 |
| 453‡ | WIPER, main | 257672 | 257678 | 257675 | 257672 (2) | 257672 (2) | 25A208 | 15W597 | 1 (2) |
| 454‡ | WIPER, PE support | 257681 | 257681 | 257681 | 257681 | 257681 | 257681 | 17T371 | 1 |
| 455‡ | PLATE, bottom | 257668 | 257668 | 257671 | 257668 | 257668 | 257671 | 257668 | 1 |
| 457‡ | PLATE, top - clamp retainer | 257692 | 257692 | 257698 | 257686 | 257686 | 257698 | C31154 (2) | 1 (2) |
| 460‡ | WIPER, support | | | 257689 | | | n/a | | 1 |
| 462‡ | SCREW, cap, hex hd | 100057 | 100057 | 112894 | 100057 | 100057 | 112894 | | 2 |
| 464 | VALVE, check | 122056 | 122056 | 501867 | 122056 | 122056 | 501867 | 122056 | 1 |
| 468‡ | TAG, instructions | n/a | n/a | n/a | | | n/a | n/a | 1 |
| 469‡ | COVER | 15W184 | 15W184 | 15W184 | | | 15W184 | | 1 |
| 470‡ | PIN, hairpin, cotter (10 pack) | 16U740 | 16U740 | 16U740 | | | 16U740 | | 2 |

Parts designated n/a are not available separately.

‡ See page 50 for wiper assembly kits.

Varying Parts - 30 Liter (8 Gallon) Platens

The following table indicates which parts (according to reference number) are included with each platen.

| Ref. | Description | Reference Numbers | | | | | Qty: |
|------|--------------------------------|-------------------|--------|--------|------------|------------|-------|
| | | 257732 | 257733 | 257734 | 257735 | 257736 | |
| 451 | BASE | 257665 | 257665 | 257662 | 257665 | 257665 | 1 |
| 452‡ | SPACER | 194148 | 194148 | 194148 | 257695 | 257695 | 1 |
| 453‡ | WIPER, main | 257673 | 257679 | 257676 | 257673 (2) | 257679 (2) | 1 (2) |
| 454‡ | WIPER, PE support | 257682 | 257682 | 257682 | 257682 | 257682 | 1 |
| 455‡ | PLATE, bottom | n/a | n/a | n/a | n/a | n/a | 1 |
| 457‡ | PLATE, top | n/a | n/a | n/a | n/a | n/a | 1 |
| 460‡ | WIPER, support | | | 257690 | | | 1 |
| 462‡ | SCREW, cap, hex hd | 100057 | 100057 | 112894 | 100057 | 100057 | 2 |
| 464 | VALVE, check | 122056 | 122056 | 501867 | 122056 | 122056 | 1 |
| 468‡ | TAG, instructions | n/a | n/a | n/a | | | 1 |
| 469‡ | COVER | 15X403 | 15X403 | 15X403 | | | 1 |
| 470‡ | PIN, hairpin, cotter (10 pack) | 16U740 | 16U740 | 16U740 | | | 2 |

Parts designated n/a are not available separately.

‡ See page 50 for wiper assembly kits.

Varying Parts - 60 Liter (16 Gallon) Platens

The following tables indicates which parts (according to reference number) are included with each platen.


| Ref. | Description | Reference Numbers | | | | | Qty: |
|------|-------------------------------|-------------------|--------|--------|------------|------------|-------|
| | | 257737 | 257740 | 257738 | 257739 | 257741 | |
| 451 | BASE | 257665 | 257665 | 257662 | 257665 | 257665 | 1 |
| 452‡ | SPACER | 257684 | 257684 | 257684 | 257696 | 257696 | 1 |
| 453‡ | WIPER, main | 257674 | 257680 | 257677 | 257674 (2) | 257680 (2) | 1 (2) |
| 454‡ | WIPER, PE support | 257683 | 257683 | 257683 | 257683 | 257683 | 1 |
| 455‡ | PLATE, bottom | n/a | n/a | n/a | n/a | n/a | 1 |
| 457‡ | PLATE, top | n/a | n/a | n/a | n/a | n/a | 1 |
| 460‡ | WIPER, support | | | 257691 | | | 1 |
| 462‡ | SCREW, cap, hex hd | 100057 | 100057 | 112894 | 100057 | 100057 | 2 |
| 464 | VALVE, check | 122056 | 122056 | 501867 | 122056 | 122056 | 1 |
| 468‡ | TAG, instructions | n/a | n/a | n/a | | | 1 |
| 469‡ | COVER | 15X404 | 15X404 | 15X404 | | | 1 |
| 470‡ | PIN, hairpin, cotter (10pack) | 16U740 | 16U740 | 16U740 | | | 2 |

▲ Parts designated n/a are not available separately.

‡ See page 50 for wiper assembly kits.


Platen Mounting Kits

Check-Mate Mounting

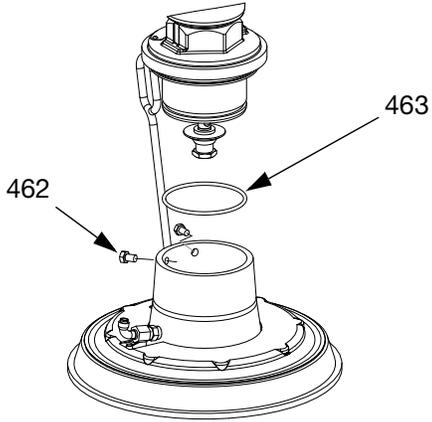


r_255648_313527_35a

Dura-Flo SS Mounting Kit 257630

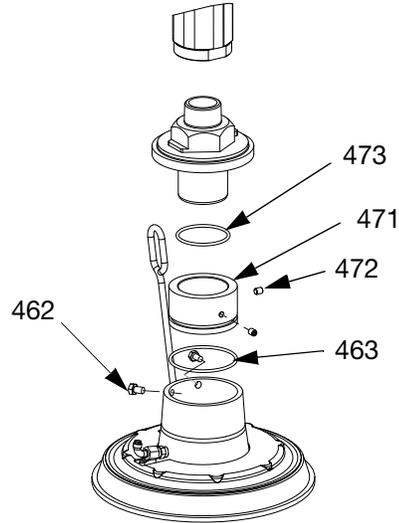

r_255648_313527_36a

Dura-Flo CS Mounting

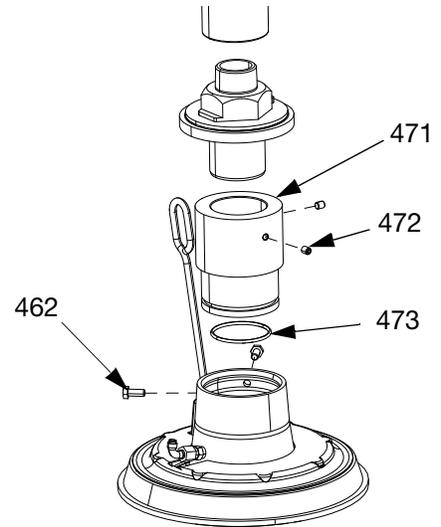

| Ref. | Part | Description | Qty. |
|------|--------|------------------|------|
| 463 | 109482 | O-RING | 1 |
| 471 | | ADAPTER | 1 |
| 472 | | SCREW, socket-hd | 2 |
| 473 | 109458 | O-RING | 1 |

Kits and Accessories

Accessories are available from Graco. Make certain all accessories are adequately sized and pressure-rated to meet the system's requirements.

Drum Roller Kits for D200 and D200S Supply Units, 255627

See the Drum Roller Kit manual for more information.

Drum Position Clamp Set for D200 Supply Units, 206537

Includes two clamps.

Drum Position Clamp for D200S Supply Units

Order quantity 2 of C32463.

Enclosed Wet Cup Recirculation Kit

See the Enclosed Wetcup Recirculation Kit manual for more information.

200 Liter (55 Gallon) Platen Cover Kits, 255691

See the Platen Cover Kit manual for more information.

Light Tower Kit, 255468

For D200s, D200, and D60 single supply systems.

See the Light Tower Kit manual for more information.

ADM Kit, 25E437

| Part | Description | Qty. |
|--------|------------------|------|
| 24E451 | MODULE, gca, adm | |
| 124415 | CABLE, 5 pin | |
| 261105 | TIE, cable | |
| 15M121 | TOKEN, gca, key | |

CAN Cables

The following CAN cables and splitter are available for use with E-Flow SP electric pumps.

| Part | Description | Length |
|--------|--------------------------------|--------|
| 125306 | CABLE, CAN, female/female | 0.3 m |
| 123422 | CABLE, CAN, female/female | 0.5 m |
| 121000 | CABLE, CAN, female/female | 0.5 m |
| 121227 | CABLE, CAN, female/female | 0.6 m |
| 121001 | CABLE, CAN, female/female | 1.0 m |
| 121002 | CABLE, CAN, female/female | 1.5 m |
| 121003 | CABLE, CAN, female/female | 3.0 m |
| 120952 | CABLE, CAN, female/female | 4.0 m |
| 121201 | CABLE, CAN, female/female | 6.0 m |
| 121004 | CABLE, CAN, female/female | 8.0 m |
| 121228 | CABLE, CAN, female/female | 15.0 m |
| 123341 | CABLE, CAN, female/female | 40.0 m |
| 121807 | CONNECTOR, splitter, male/male | |

I/O Cable, 122029

See the E-Flo SP Software Instructions manual for setup and pin out information.

| Part | Description | Length |
|--------|--------------------|--------|
| 122029 | CABLE, GCA, M12-8p | 15.0 m |

Communication Gateway Module (CGM) Kits

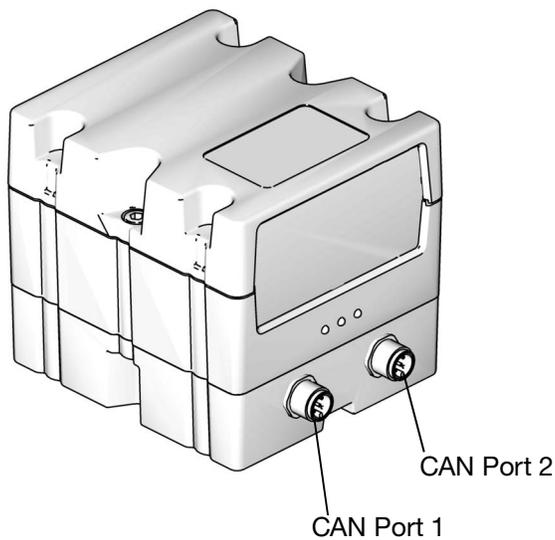


Fig. 32: CGM CAN Connections

4. Drill the mounting holes using the mounting hole dimensions shown in FIG. 33.


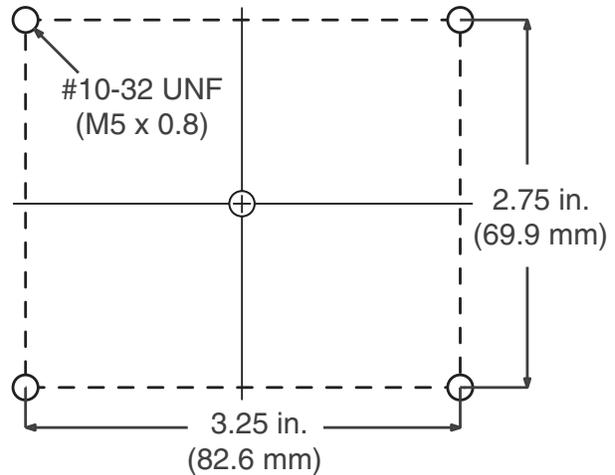


Fig. 33: CGM Mounting Holes

CGM Kits

| Part Number | Description |
|-------------|---------------------|
| 25E426 | CGM Kit, Ethernetip |
| 25E427 | CGM Kit, DeviceNet |
| 25E428 | CGM Kit, PROFINET |
| 25E429 | CGM Kit, PROFIBUS |

Installing a CGM Kit

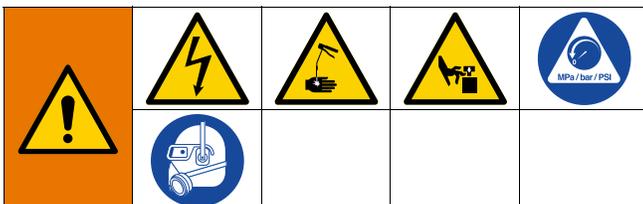

All electrical wiring must be done by a qualified electrician and comply with all local codes and regulations

1. Follow the **Pressure Relief Procedure** on page 22.
2. Verify the power is off to the system.
3. Mount the CGM near the pump or near the integration point.

5. Remove the access cover from the CGM (CA). Loosen the two screws (CB) and remove the CGM (CC) from the base (CD) as shown in FIG. 34.

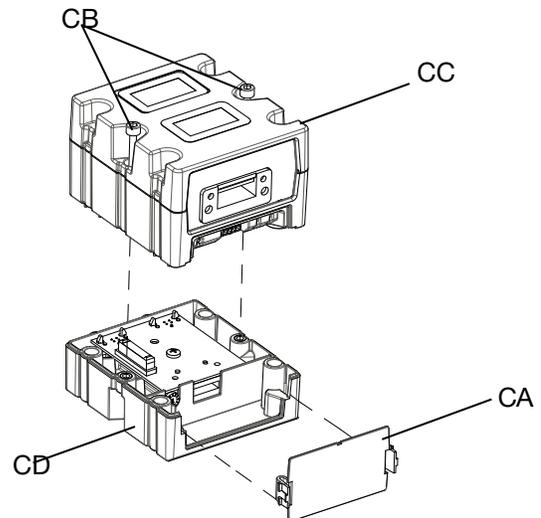


Fig. 34: Disassembling the CGM

6. Using the four 10-32 mounting screws included with the kit, mount the base (CD) in the holes you drilled.
7. Reattach the CGM (CC) on the base (CD) with the two screws (CB) that were removed in step 5.
8. Reattach the access cover (CA).

9. Connect the CAN cable included in the kit to either port 1 or port 2 (whichever is available) on the driver. See FIG. 35.

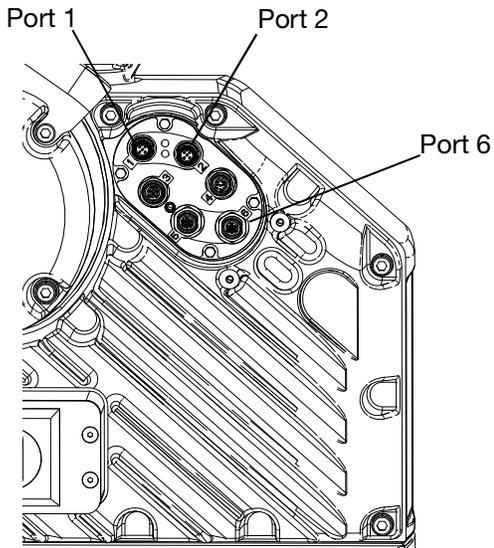


FIG. 35: Driver Port Locations

10. Connect the other end of the CAN cable to either CAN port 1 or 2 on the CGM. See FIG. 32. It can be connected to either port.

NOTE: Longer CAN cables, if required, are available from Graco. See **CAN Cables** on page 54.

11. Connect the Ethernet, DeviceNet, or PROFIBUS cable to the fieldbus connection on the CGM as applicable. See FIG. 36.

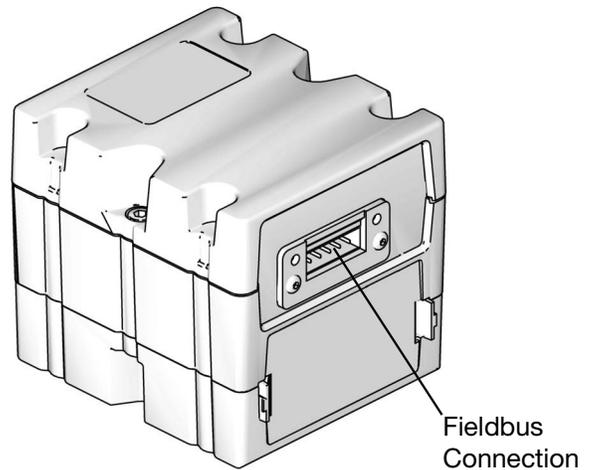




FIG. 36: CGM Fieldbus Connection

12. Connect the other end of the cable to the fieldbus device.
13. Refer to the Graco Control Architecture Module Programming manual for step-by-step instructions on how to update the software version of GCA modules. See **Related Manuals** on page 3.
14. Refer to the E-Flo SP Software Instructions manual for details regarding the fieldbus pinout setup and to perform the setup procedure to configure the fieldbus. See **Related Manuals** on page 3.

Low Level Sensor Kit, 25E447

To install the Low Level Sensor:

1. Turn the disconnect switch (M) OFF.
2. Disconnect cable from the empty level sensor (EL).
3. Mount the low level sensor (LL) on the mounting bracket.
4. Connect the shorter cable to the low level sensor (LL).
5. Connect the other shorter cable to the empty level sensor (EL).
6. Connect the low level sensor cable to the A port on the splitter (SP).
7. Connect the empty level sensor cable to the B port on the splitter (SP).
8. Connect the original cable to the last port on the splitter (SP).
9. Raise/lower the low level sensor (LL) to the desired position to activate the sensor.
10. See the E-Flo SP Software Instructions manual to set up the low level sensor.

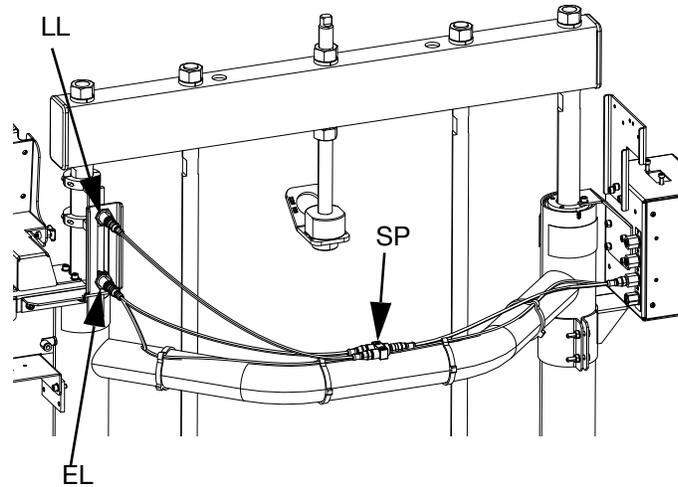
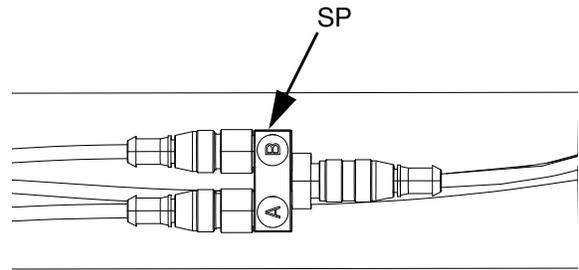


Tandem Connection Kit, 25E595


| Ref. | Part | Description | Qty. |
|------|--------|---------------------|------|
| 501 | 121226 | CABLE, can, 0.4 m | 1 |
| 502 | 124003 | CABLE, can, 5.0 m | 1 |
| 503 | 121003 | CABLE, can, 3.0 m | 1 |
| 504 | 121807 | CONNECTOR, splitter | 1 |
| 505 | 114958 | STRAP, tie | 3 |
| 506 | 117329 | STRAP, tie | 6 |

To install the Tandem Connection Kit:



1. On the primary tandem unit (Ram 1), connect the cable (501) from port C1 to the splitter (504).

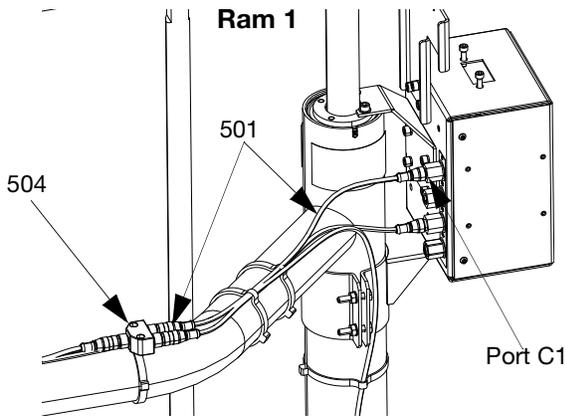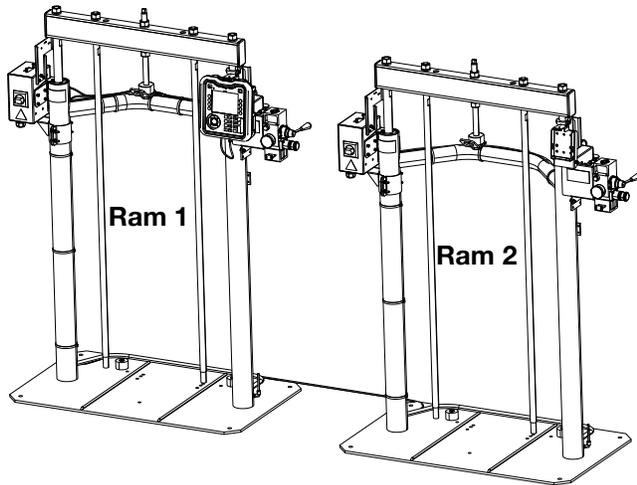

2. Connect the other cable (503) from the splitter to the ADM. Run the cable along the back of the ram using wire ties (505) to secure to the tubing.

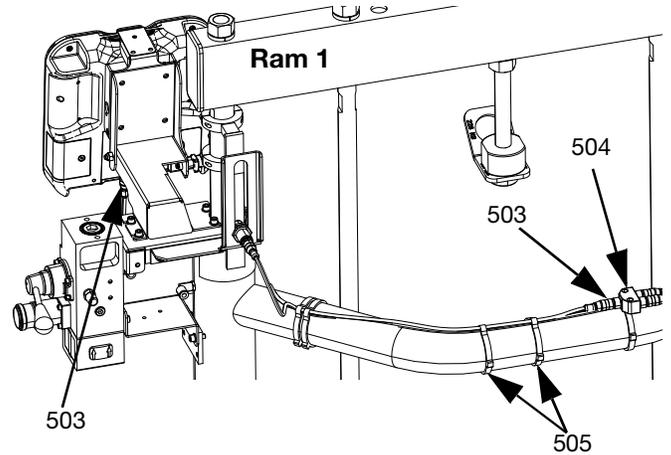

3. Connect the cable (502) from the splitter to port C2 on the secondary tandem unit (Ram 2) junction box.

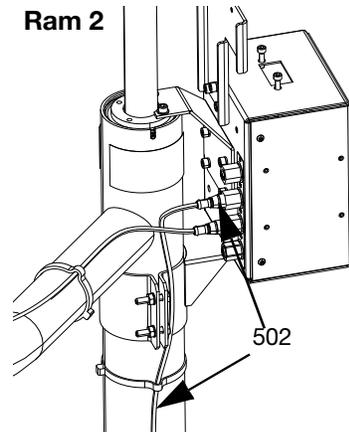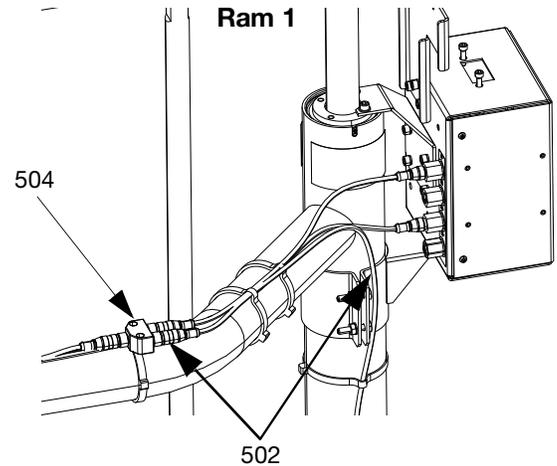


4. See the E-Flo SP Software Instructions manual for system setup.

Tandem Depressurization/Recirculation Kit, 25E618 (carbon steel), 25E619 (stainless steel)


| Ref. Part | Description | Qty. |
|-----------|---|---------|
| 601 | C20487 FITTING, nipple, hex (25E618 only) 190724 NIPPLE, sst (25E619 only) | 1 |
| 602 | 132019 FITTING, tee, 3/4 npt (25E618 only) 15M862 FITTING, tee, pipe (25E619 only) | 1 |
| 604 | 15B556 FITTING, adapter, 1/4 npt x 3/4 npt | 1 |
| 605 | 156648 ADAPTER, swivel, straight (25E618 only) 15M859 FITTING, adapter, male, swivel (25E619 only) | 1 |
| 606 | 054753 TUBE, nylon, black | 22.5 ft |
| 607 | 25R844 VALVE, 25, npt/b,000rm,amb,5k | 1 |
| 609 | 255722 HOSE, coupled, hp (25E618 only) 255725 HOSE, coupled, hp, sst (25E619 only) | 1 |
| 610 | 517434 FITTING, tee, 1/2 npt | 1 |
| 613 | 15M574 VALVE, solenoid | 1 |
| 614 | 117820 SCREW, cap, socket hd | 2 |
| 615 | 198178 FITTING, elbow | 3 |
| 616 | 17Z412 BRACKET, valve, solenoid | 1 |
| 617 | 107100 SCREW, cap | 2 |
| 618 | 18A098 HARNESS, solenoid, tandem PKG | 1 |
| 619 | 116504 FITTING, tee | 1 |
| 620 | 070408 SEALANT, pipe, sst | 1 |
| 621 | 114958 STRAP, tie | 4 |
| 624 | 114151 FITTING, elbow, male, swivel | 2 |

To assemble the Tandem Depressurization/Recirculation Kit:


1. Disconnect the air line from the air assist body check valve (EH).
2. Remove the bleed stick (EF) and bleed port (EG). Save all parts for later.

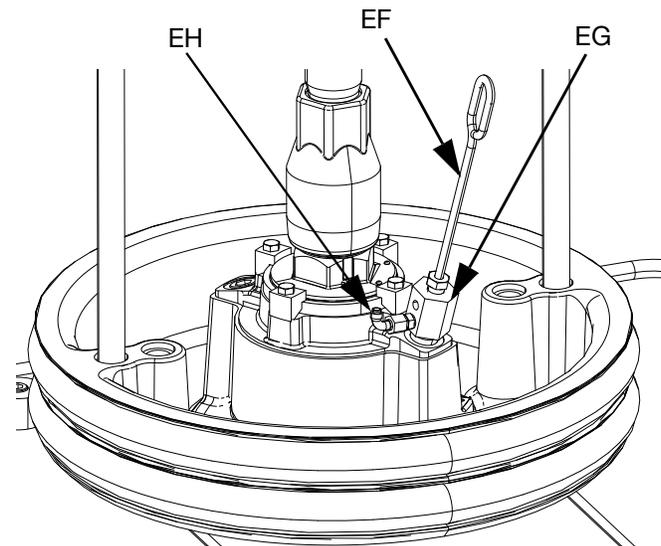


3. Assemble the fittings and valve onto the platen as shown below.

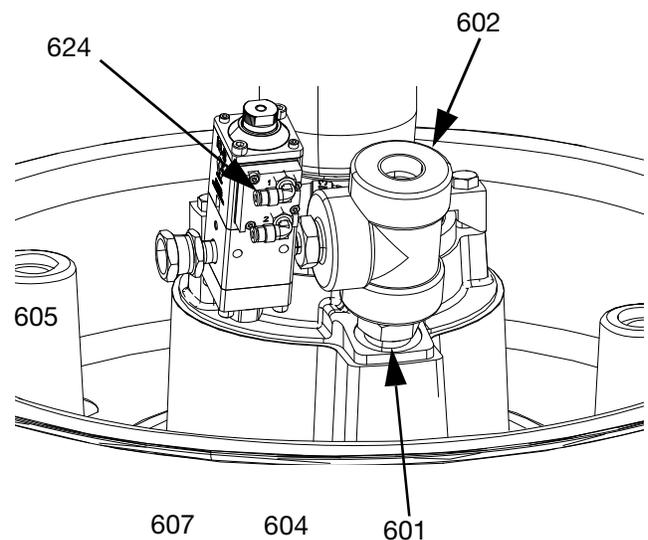


- Assemble the bleed port (EG) and bleed stick (EF) to the cross fitting (602).

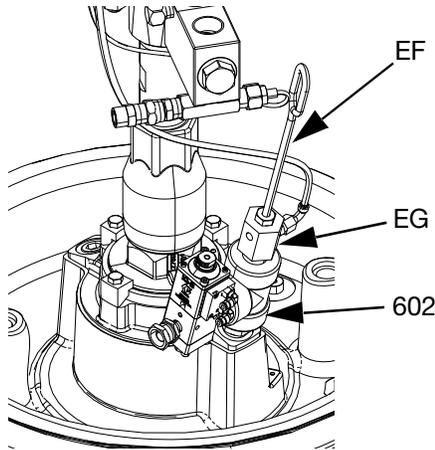


- Connect the cable (618) from the solenoid (613) to Port 4 on the driver.

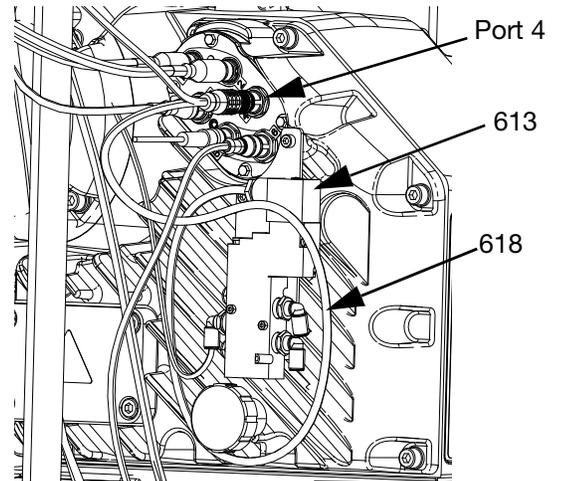


- Mount the solenoid mounting plate (616) to the side of the driver using the supplied screws (617).

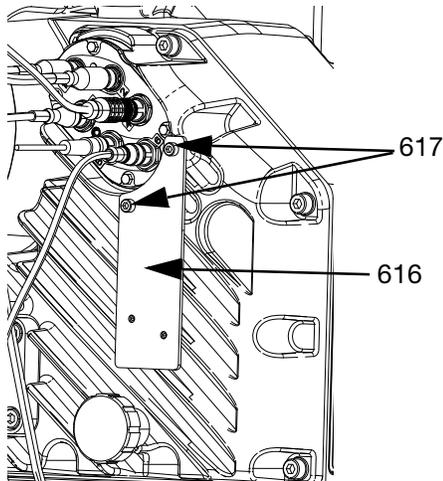


- Remove the adapter and pressure transducer from the bottom of the check valve block.

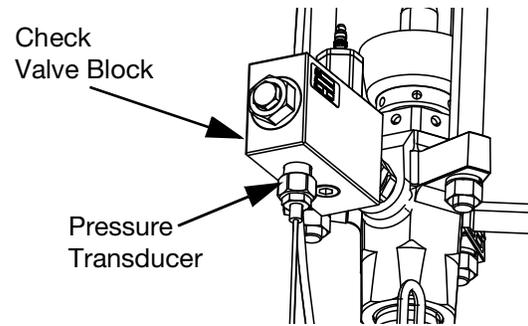

- Mount the solenoid (613) to the solenoid mounting plate (616) with the supplied screws (614).

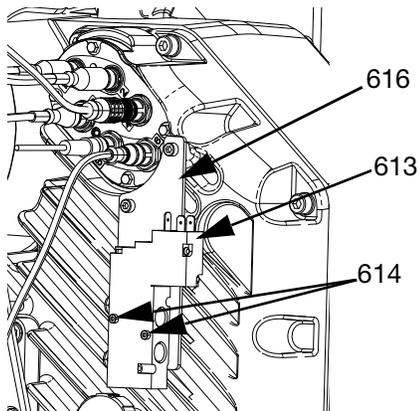


- Connect the tee fitting (614) to replace the adapter and pressure transducer removed in the previous step.

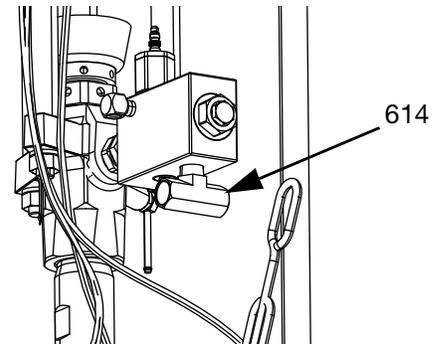


10. Looking at the valve check block from the front, connect the adapter and pressure transducer that were removed in step 8 to the connection on the right side of the tee fitting (610). Connect a union adapter fitting (605) to the other side of the tee fitting.




11. Connect the hose (609) between the fitting (605) above to the fitting (605) in the valve.

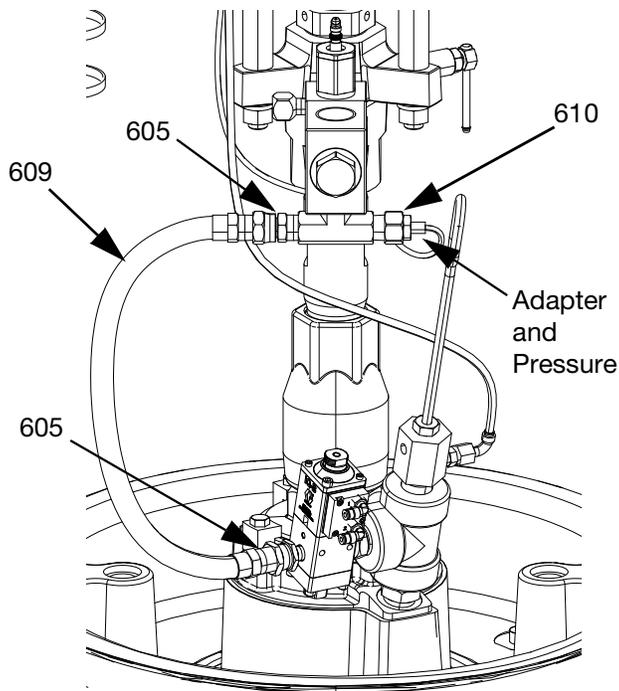



12. Install the fittings (611, 615) on the back of the integrated air control module (G).

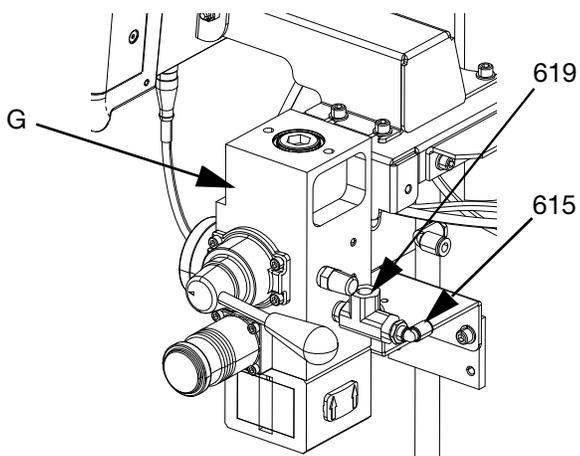

13. Install the air line (606) from the integrated air control module (G), along the back of the ram, through the cable track and to the solenoid (613).

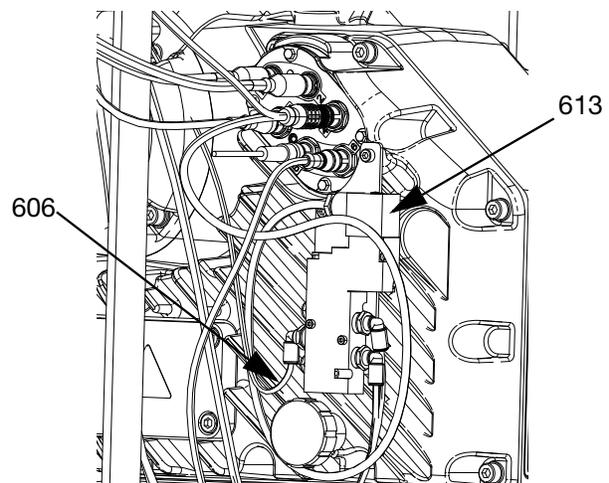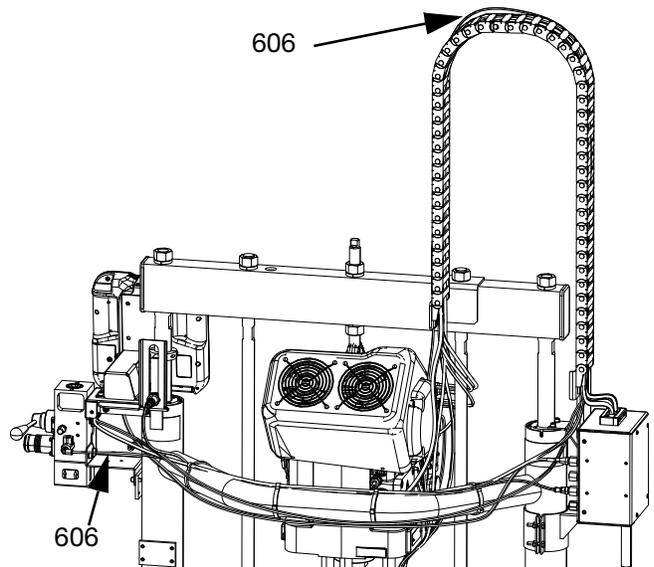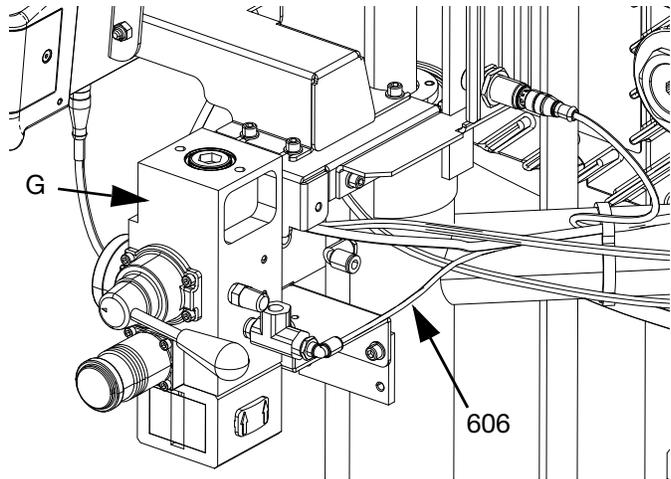


14. Install the air line (606) from the lower solenoid outlet to the valve close fitting (615). Cut any excess air line.
15. Install the air line (606) from the upper solenoid outlet to the valve open fitting (615). Cut any excess air line.

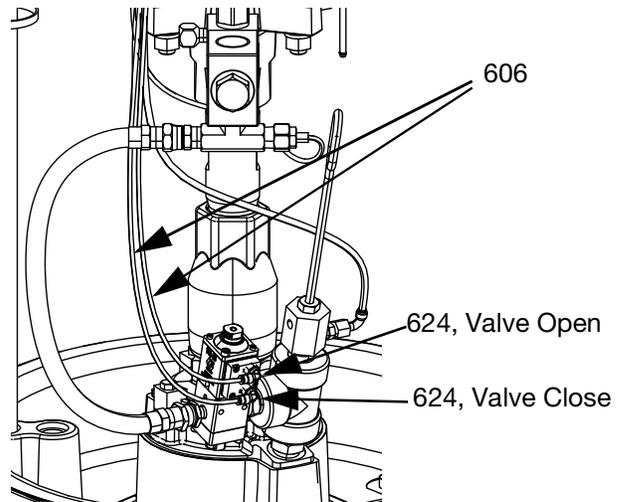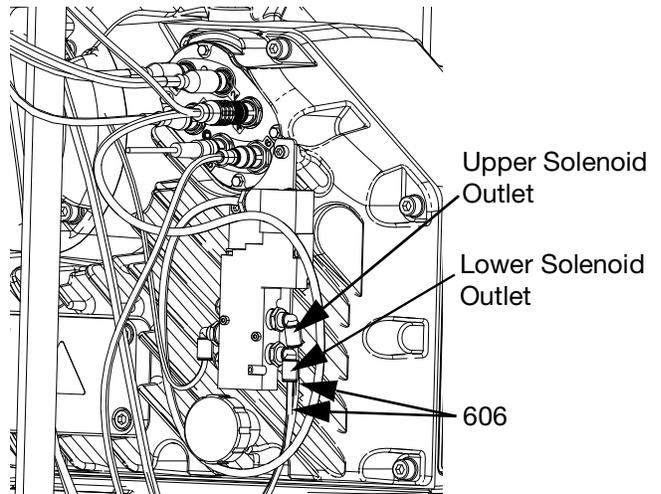

16. See the E-Flo SP Software Instructions manual for Depressurization/Recirculation setup.

Tandem Fluid Filter Kit, 25E620

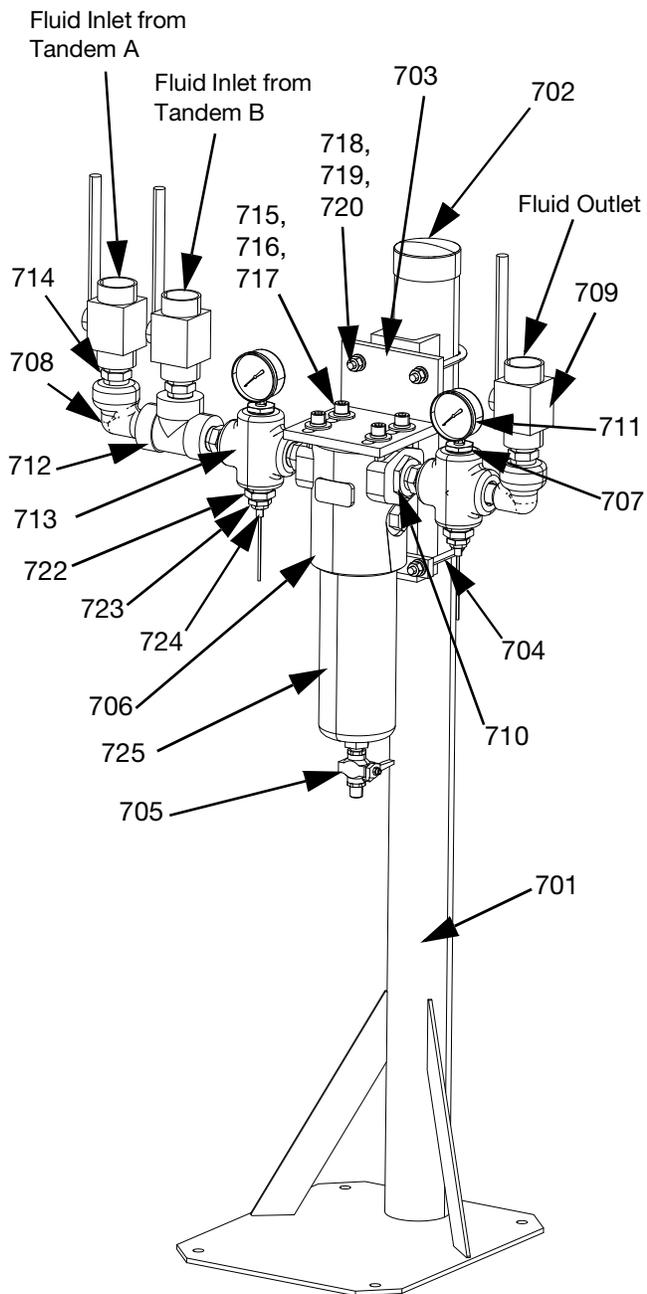

| Ref. | Part | Description | Qty. |
|------|--------|-----------------------------------|------|
| 701 | 247498 | SUPPORT, stand | 1 |
| 702 | 410178 | CAP PLUG, vinyl | 1 |
| 703 | 147499 | BASE, mounting | 1 |
| 704 | C30021 | BOLT, u | 2 |
| 705 | 210658 | VALVE, ball | 1 |
| 706 | 515216 | HOUSING, filter | 1 |
| 707 | C19652 | FITTING, bushing, reducing | 2 |
| 708 | 121189 | FITTING, elbow, 1" | 2 |
| 709 | 521477 | VALVE, ball, 1" | 3 |
| 710 | 121182 | ADAPTER, pipe, female | 2 |
| 711 | 102814 | GAUGE, press, fluid | 2 |
| 712 | C19488 | FITTING, tee | 1 |
| 713 | 121163 | FITTING, cross, 1" npt | 2 |
| 714 | 131526 | FITTING, nipple, 1" npt, cs | 6 |
| 715 | 101044 | WASHER, plain | 4 |
| 716 | 100018 | WASHER, lock, spring | 4 |
| 717 | C19853 | SCREW, cap, socket hd | 4 |
| 718 | 100023 | WASHER, flat | 4 |
| 719 | 100133 | WASHER, lock, 3/8 | 4 |
| 720 | 100131 | NUT, full hex | 4 |
| 721 | 070408 | SEALANT, pipe, sst | 1 |
| 722 | 158586 | FITTING, bushing | 2 |
| 723 | 16U440 | ADAPTER, fitting, pressure sensor | 2 |
| 724 | 15M669 | SENSOR, pressure, fluid outlet | 2 |
| 725 | 515222 | ELEMENT, filter | 1 |
| 726 | 15Y048 | CABLE, M12 | 2 |

To assemble the Tandem Fluid Filter Kit:

1. Ensure the base of the fluid filter stand (701) is level in all directions. If necessary, use metal shims to level the base.
2. Secure the base to the floor using anchors that are long enough to prevent the filter stand from tipping.
3. Install the material hose from tandem A to fluid inlet A.
4. Install the material hose from tandem B to fluid inlet B.
5. Install the material hose from the fluid filter outlet to the dispense valve.
6. Connect the inlet fluid filter pressure transducer to Port 6 on the tandem A driver for fluid filter monitoring.


7. Connect the inlet fluid filter pressure transducer to port 6 on the tandem B driver for fluid filter monitoring.

- a. Available extension cables are shown in the table below.

| Part | Description |
|--------|--------------------------|
| 122497 | CABLE, M12, 5 pin, 2 m |
| 124409 | CABLE, M12, 5 pin, 3 m |
| 124943 | CABLE, M12, 5 pin, 1 m |
| 17H363 | CABLE, M12, 5 pin, 7.5 m |
| 17H364 | CABLE, M12, 5 pin, 16 m |

8. See the E-Flo SP Software Instructions manual to set up fluid filter monitoring on the ADM.

Fluid Filter Kit Dimensions

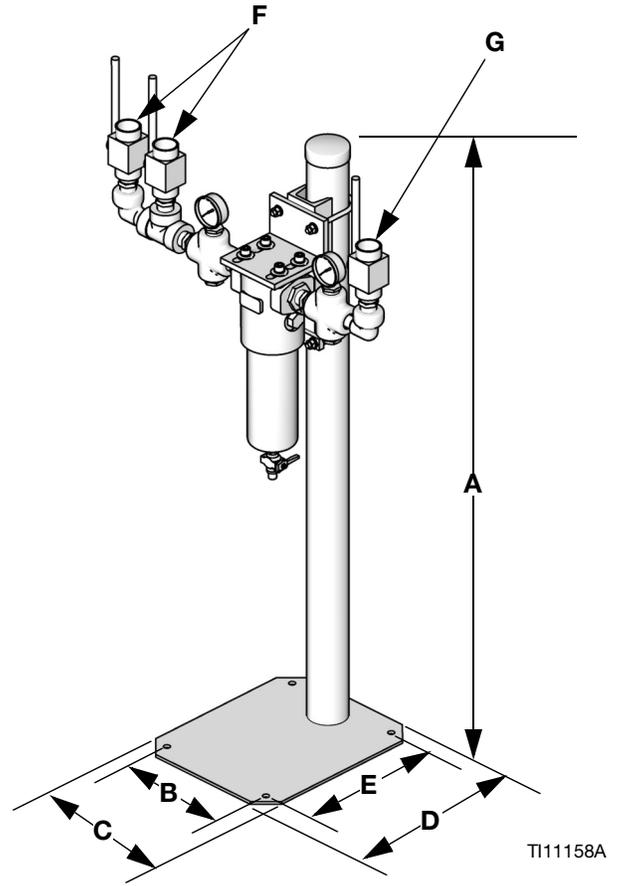

TI11158A


Key

| | |
|---|---------------------|
| A | 52.25 in. (1327 mm) |
| B | 11 in. (279 mm) |
| C | 14 in. (356 mm) |
| D | 17 in. (432 mm) |
| E | 14 in. (356 mm) |
| F | 1 in. npt(f) |
| G | 1 in. npt(f) |

Filter Element Mesh Sizes

| Part No. | Mesh |
|----------|---------------|
| 515219 | 60 |
| 515220 | 50 |
| 515221 | 40 |
| 515222 | 30 (standard) |

Dimensions

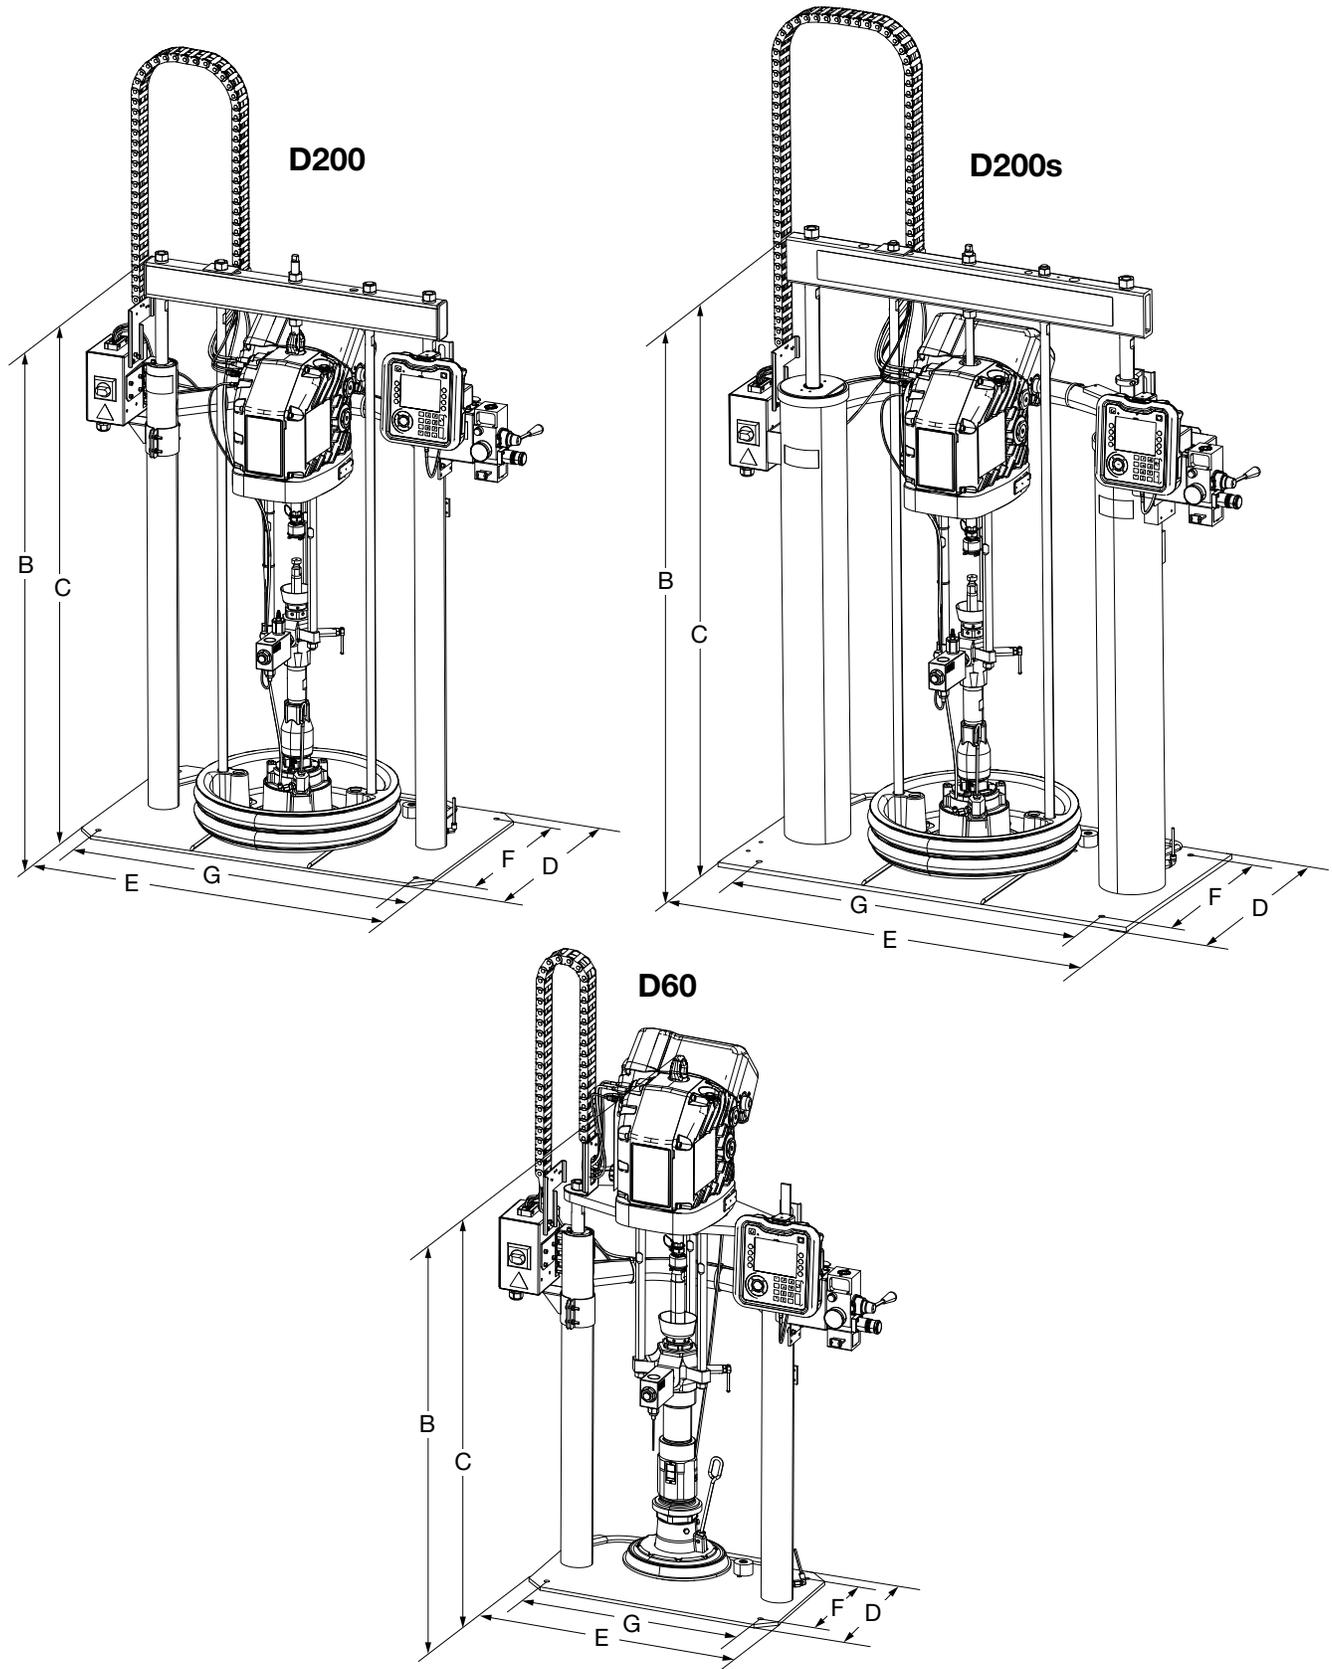

Dimensions


| | Ram Size in. (mm) | | |
|--------------------------------|----------------------|------------|------------|
| | D60 | D200 | D200s |
| Total Height (A) | 70 (1778) | 88 (2235) | 96 (2438) |
| Ram Height (B) | 57 (1448) | 63 (1600) | 69 (1753) |
| Extended Ram Height (C) | 89 (2261) | 118 (2997) | 125 (3175) |
| Base Depth (D) | 20 (508) | 25 (635) | 25 (635) |
| Machine Width (E) | 45 (1143) | 55 (1397) | 64 (1626) |
| Mounting Hole Depth (F) | 14 (356) | 21 (533) | 23 (584) |
| Mounting Hole Width (G) | 24 (610) | 38 (965) | 45 (1143) |

Weight

Use the table below to identify the maximum weight for each available platen size.

| Platen Size Gallons (Liters) | Maximum Weight |
|---------------------------------|----------------|
| 55 (200) | 51 (23) |
| 30 (115) | 44 (20) |
| 16 (60) | 25 (11.3) |
| 8 (30) | 21 (9.5) |
| 5 (20) | 19 (8.7) |

See the identification plate (ID) for the weight of your supply system.

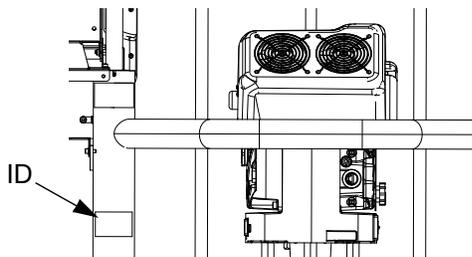

Technical Specifications

| E-Flo SP Supply Systems | | |
|--|--|---------------|
| | US | Metric |
| Driver force | 3,872 lbs | 1,756 kg |
| Stroke length | 4.75 in. | 120.65 mm |
| Maximum fluid operating temperature | 180°F | 82.3°C |
| Maximum driver cycle rate | 25 cycles per minute | |
| Driver Line voltage rating | 200-240 VAC, single phase, 50/60 HZ Transformer option available (400-480 VAC) | |
| Air inlet size (supply system) | 3/4 npt(f) | |
| Ambient operating temperature range (supply system) | 32-100°F | 0-38°C |
| Motor cutback threshold | 212°F | 100°C |
| IGBT/Electronics cutback threshold | 167°F | 75°C |
| Displacement pump effective area | See pump manual. | |
| Wetted parts | See pump manual. | |
| Sound pressure, measured per EN ISO 11202:2010 | | |
| Normal operation (dispensing) | < 70 dBA | |
| Drum change | 77 dBA | |
| Full load amperage * | | |
| 240V systems Δ Line-Line | 20 A | |
| 400V systems Y Line-Neutral | 35 A | |
| 480V systems Δ Transformer | 10 A | |
| Fluid inlet size | | |
| Check-Mate | Not Applicable | |
| Dura-Flo 145SS, 180SS | 1 1/2 in. NPT, female | |
| Dura-Flo 220SS, 290SS, 430SS, 430CS, 430SM | 2 in. NPT, female | |
| Dura-Flo 115CS, 145CS, 180CS, 220CS, 290CS, 220CT, 290CT | 1 1/4 in. NPT, male | |
| Fluid outlet size | | |
| Check-Mate 100, 200, 250 | 1" NPT female | |
| Check-Mate 500 | 1-1/2" NPT female | |
| Dura-Flow 115, 145, 180, 220, 290 | 1" NPT female | |
| Dura-Flow 430 | 1-1/2" NPT female | |
| Motor Oil | | |
| Specification | Graco part no. 16W645, ISO220 silicone free synthetic EP gear oil ** | |
| Capacity | 1.5 quarts | 1.4 liters |
| Platen wetted materials | | |
| 257727, 5 gal. (20 L) | Electroless nickel, polyurethane, nitrile, carbon steel, polyethylene, zinc plated carbon steel, buna, 316 sst, 17-4PH sst | |
| 257732, 8 gal. (30 L) | | |
| 257737, 16gal. (60 L) | | |
| 257728, 5 gal. (20 L) | Electroless nickel, polyurethane, carbon steel, polyethylene, nitrile, zinc plated carbon steel, buna, 316 sst 17-4PH sst | |
| 257733, 8 gal. (30 L) | | |
| 257740, 16gal. (60 L) | | |

| E-Flo SP Supply Systems | | |
|---|--|-----------------|
| | US | Metric |
| 257729, 5 gal. (20 L) | Stainless steel, polyurethane, PTFE coated nitrile, polyethylene, nitrile, PTFE, 303 sst, 304 sst, 316 sst, 17-4PH sst | |
| 257734, 8 gal. (30 L) | | |
| 257738, 16gal. (60 L) | | |
| 257730, 5 gal. (20 L) | Electroless nickel, aramind reinforced elastomer, rubber-based PSA, nitrile, polyethylene, zinc plated carbon steel, buna, 1018 carbon steel, 304 sst, 316 sst, 17-4PH sst | |
| 257735, 8 gal. (30 L) | | |
| 257739, 16gal. (60 L) | | |
| 257731, 5 gal. (20 L) | Electroless nickel, aramind reinforced elastomer, rubber-based PSA, polyurethane, polyethylene, nitrile, zinc plated carbon steel, buna, 1018 carbon steel, 304 sst, 316 sst, 17-4PH sst | |
| 257736, 8 gal. (30 L) | | |
| 257741, 16gal. (60 L) | | |
| 25E110, 5 gal. (20 L) | Electroless nickel, nitrile, carbon steel, zinc plated carbon steel, buna, 316 sst, 17-4PH sst, aluminum, PVC | |
| 25A206, 5 gal. (20 L) | Stainless steel, polyurethane, nitrile (FDA approved), polyethylene | |
| Maximum air input pressure (supply system) | | |
| D60 - 3 in. dual post, 5 gal. (20 L) | 150 psi | 1.0 MPa, 10 bar |
| D200 - 3 in. dual post, 55 gal. (200 L) | 150 psi | 1.0 MPa, 10 bar |
| D200s - 6.5 in. dual post, 55 gal. (200 L) | 125 psi | 0.9 MPa, 9 bar |

| Pressure Table | | | | | |
|-----------------------|-------------------|---|------------|------------------------------|------------|
| | | Max Working /Run Pressure (ADM Setpoint) *** | | Max Deadhead Pressure | |
| | | psi | bar | psi | bar |
| Check-Mate | Lower Size | | | | |
| | 100CS/CM/SS/SM | 6,000 | 414 | 6,000 | 414 |
| | 100CE | 4,200 | 290 | 5,500 | 380 |
| | 200CS/CM/SS/SM/CE | 3,220 | 222 | 4,200 | 290 |
| | 250CS/CM/SS/SM | 2,580 | 178 | 3,400 | 234 |
| | 500CS/CM/SS/SM | 1,290 | 88.9 | 1,600 | 110 |
| Dura-Flow | 145SS | 4,440 | 306 | 5,600 | 386 |
| | 180SS | 3,580 | 247 | 4,500 | 310 |
| | 220SS | 2,930 | 202 | 3,700 | 255 |
| | 290SS | 2,200 | 153 | 2,800 | 193 |
| | 430CS/SS/SM | 1,500 | 103 | 1,900 | 131 |
| | 115CS | 5,600 | 386 | 6,000 | 414 |
| | 145CS | 4,440 | 306 | 5,600 | 386 |
| | 180CS | 3,580 | 247 | 4,500 | 310 |
| | 220CS | 2,930 | 202 | 3,700 | 255 |
| | 290CS | 2,220 | 153 | 2,800 | 193 |

* Full load amps with all devices operating at maximum capacity.

** The driver gearbox is shipped from the factory pre-filled with oil. Additional oil must be purchased separately.

*** Use this number when sizing systems.

California Proposition 65

CALIFORNIA RESIDENTS

 **WARNING:** Cancer and reproductive harm – www.P65warnings.ca.gov.

Graco Standard Warranty

Graco warrants all equipment referenced in this document which is manufactured by Graco and bearing its name to be free from defects in material and workmanship on the date of sale to the original purchaser for use. With the exception of any special, extended, or limited warranty published by Graco, Graco will, for a period of twelve months from the date of sale, repair or replace any part of the equipment determined by Graco to be defective. This warranty applies only when the equipment is installed, operated and maintained in accordance with Graco's written recommendations.

This warranty does not cover, and Graco shall not be liable for general wear and tear, or any malfunction, damage or wear caused by faulty installation, misapplication, abrasion, corrosion, inadequate or improper maintenance, negligence, accident, tampering, or substitution of non-Graco component parts. Nor shall Graco be liable for malfunction, damage or wear caused by the incompatibility of Graco equipment with structures, accessories, equipment or materials not supplied by Graco, or the improper design, manufacture, installation, operation or maintenance of structures, accessories, equipment or materials not supplied by Graco.

This warranty is conditioned upon the prepaid return of the equipment claimed to be defective to an authorized Graco distributor for verification of the claimed defect. If the claimed defect is verified, Graco will repair or replace free of charge any defective parts. The equipment will be returned to the original purchaser transportation prepaid. If inspection of the equipment does not disclose any defect in material or workmanship, repairs will be made at a reasonable charge, which charges may include the costs of parts, labor, and transportation.

THIS WARRANTY IS EXCLUSIVE, AND IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO WARRANTY OF MERCHANTABILITY OR WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE.

Graco's sole obligation and buyer's sole remedy for any breach of warranty shall be as set forth above. The buyer agrees that no other remedy (including, but not limited to, incidental or consequential damages for lost profits, lost sales, injury to person or property, or any other incidental or consequential loss) shall be available. Any action for breach of warranty must be brought within two (2) years of the date of sale.

GRACO MAKES NO WARRANTY, AND DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, IN CONNECTION WITH ACCESSORIES, EQUIPMENT, MATERIALS OR COMPONENTS SOLD BUT NOT MANUFACTURED BY GRACO. These items sold, but not manufactured by Graco (such as electric motors, switches, hose, etc.), are subject to the warranty, if any, of their manufacturer. Graco will provide purchaser with reasonable assistance in making any claim for breach of these warranties.

In no event will Graco be liable for indirect, incidental, special or consequential damages resulting from Graco supplying equipment hereunder, or the furnishing, performance, or use of any products or other goods sold hereto, whether due to a breach of contract, breach of warranty, the negligence of Graco, or otherwise.

FOR GRACO CANADA CUSTOMERS

The Parties acknowledge that they have required that the present document, as well as all documents, notices and legal proceedings entered into, given or instituted pursuant hereto or relating directly or indirectly hereto, be drawn up in English. Les parties reconnaissent avoir convenu que la rédaction du présente document sera en Anglais, ainsi que tous documents, avis et procédures judiciaires exécutés, donnés ou intentés, à la suite de ou en rapport, directement ou indirectement, avec les procédures concernées.

Graco Information

Sealant and Adhesive Dispensing Equipment

For the latest information about Graco products, visit www.graco.com.

For patent information, see www.graco.com/patents.

TO PLACE AN ORDER, contact your Graco distributor, go to www.graco.com, or call to identify the nearest distributor.

If calling from the USA: 1-800-746-1334

If calling from outside the USA: 0-1-330-966-3000

All written and visual data contained in this document reflects the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Original instructions. This manual contains English. MM 3A6331

Graco Headquarters: Minneapolis

International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA
Copyright 2018, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com
Revision N, December 2024