

GLC X Test Box

3A7289A

EN

For testing and demonstrating the features of the GLC X Lubrication Controller. For professional use only.

Part No. 26A853




Important Safety Instructions


For complete warnings and instructions refer to the GLC X Lubrication Controller instruction manual.

Related Manuals

3A7031- GLC X Lubrication Controller

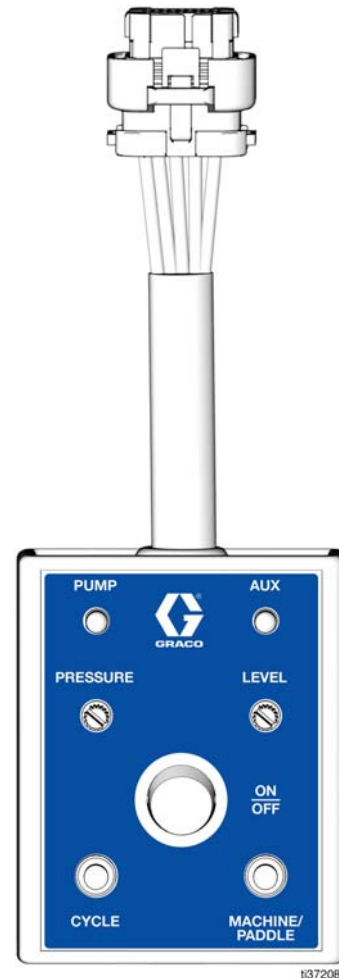

Component Identification

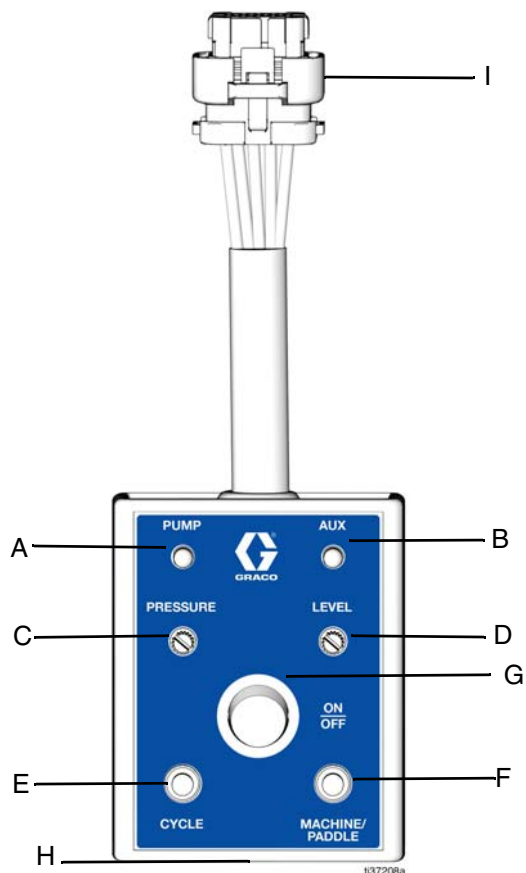

Ref.		Description
A	LED 1:	Illuminates while GLC X output 1 (Pump) is active.
B	LED 2:	Illuminates while GLC X output 2 (Aux/Alarm) is active.
C	Dial 1:	GLC X pressure input control emulates a sensor or switch.
D	Dial 2:	GLC X low level input control emulates a sensor or a switch.
E	Button 1:	GLC X cycle input control.
F	Button 2:	GLC X machine count or paddle low level control (depends upon the configuration of the device).
G	Power Switch:	Turns the power on or off from the power source.
H	Power Connector:	Input power connector (barrel jack) to power the GLC X Controller. See GLC X Manual for operating voltage range (Mating Connector Phoenix Contact 1758856).
I	Connector:	Plugs into GLC X.

Graco Information

For the latest information about Graco products, visit www.graco.com.

For patent information, see www.graco.com/patents.

TO PLACE AN ORDER, contact your Graco distributor or call to identify the nearest distributor.

Phone: 612-623-6928 or Toll Free: 1-800-533-9655, Fax: 612-378-3590

All written and visual data contained in this document reflects the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Original instructions. This manual contains English. MM 3A7049

Graco Headquarters: Minneapolis

International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA
Copyright 2019, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com

Revision A, October 2019