



XDX Series Hose Reels

Extreme Performer




PROVEN QUALITY. LEADING TECHNOLOGY.

XDX Series Hose Reels

Extreme Performer

The high-performance and heavy-duty XDX Series Hose Reel is ideal for rugged indoor and outdoor use in truck dealerships, fleet maintenance, mining maintenance, public works garages, construction vehicle maintenance and service trucks. Features high-strength dual pedestals for reliable performance in extreme applications.

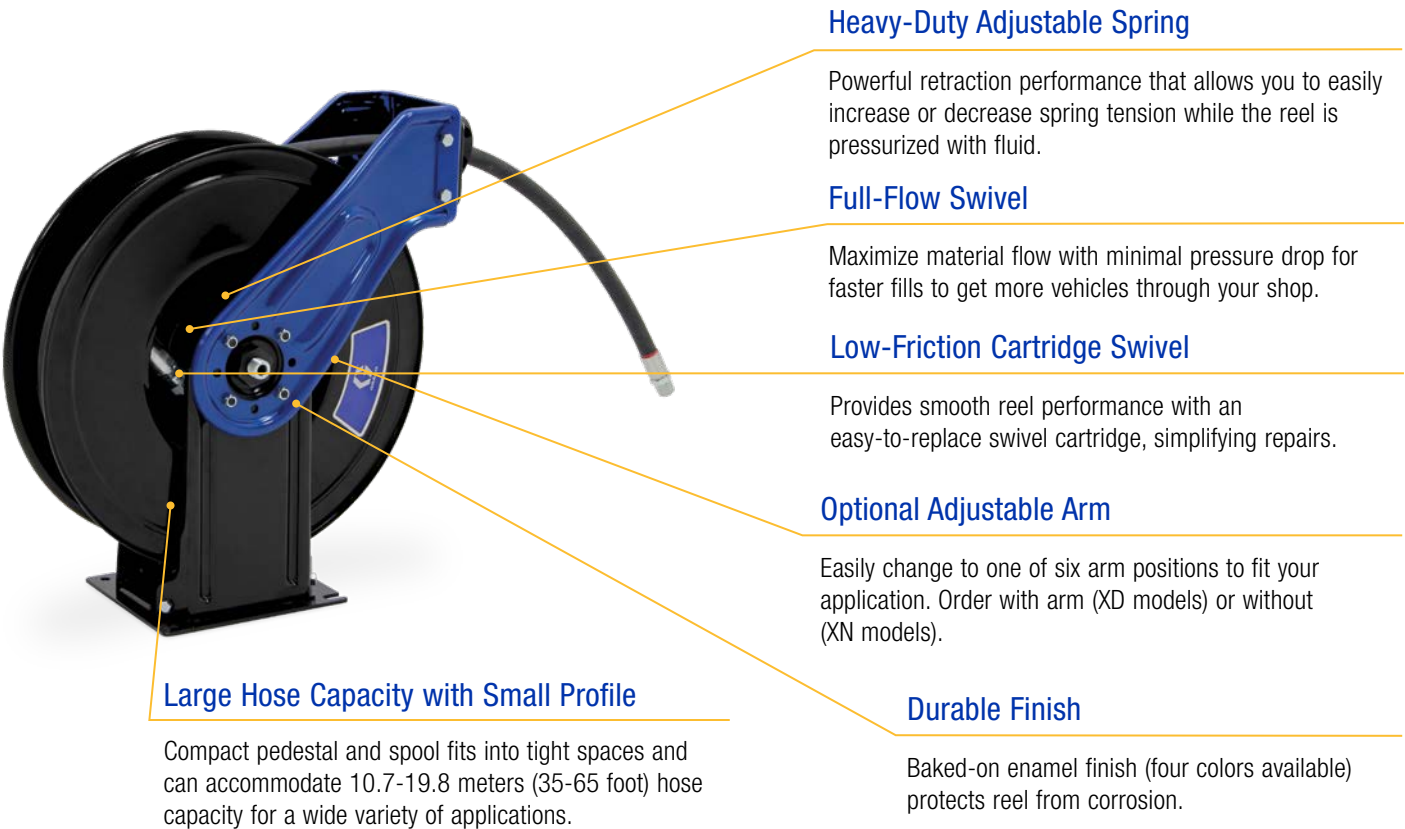

Heavy-Duty Adjustable Spring

Powerful retraction performance that allows you to easily increase or decrease spring tension while the reel is pressurized with fluid.

Full-Flow Swivel

Maximize material flow with minimal pressure drop for faster fills to get more vehicles through your shop.

Low-Friction Cartridge Swivel

Provides smooth reel performance with an easy-to-replace swivel cartridge, simplifying repairs.

Optional Adjustable Arm

Easily change to one of six arm positions to fit your application. Order with arm (XD models) or without (XN models).

Large Hose Capacity with Small Profile

Compact pedestal and spool fits into tight spaces and can accommodate 10.7-19.8 meters (35-65 foot) hose capacity for a wide variety of applications.

Durable Finish

Baked-on enamel finish (four colors available) protects reel from corrosion.

Typical Applications

- Heavy-duty truck dealers
- Fleet maintenance
- Mining maintenance
- Public works garage
- Construction vehicle maintenance
- Heavy-duty mobile service trucks
- Mining
- Lube trucks

Typical Fluids Handled

- Petroleum- and synthetic-based oils (motor, gear and ATF)
- Air
- Water
- Grease
- Antifreeze/coolant
- Windshield washer fluid

Technical Specifications


Operating Temperature Range	
Air/Water/Antifreeze/Windshield Washer Fluid	-28°C to 87°C (-20°F to 190°F)
Oil	-28°C to 87°C (-20°F to 190°F)
Grease	-40°C to 93°C (-40°F to 200°F)
Wetted Parts	
Air/Water/Antifreeze/Windshield Washer Fluid	Zinc-plated steel, stainless steel, anodized aluminum, nitrile rubber
Oil	Zinc-plated steel, anodized aluminum, nitrile rubber
Grease	Zinc-plated steel, polyurethane, steel
Weight (Without Hose)	
XD Models (With Adjustable Arm)	26.5 kg (59 lb)
XN Models (Without Arm)	23.5 kg (52 lb)
Sound Pressure Level	78 dB(A)
Sound Power Level	88 dB(A)
Instruction Manual	3A8626




Dimensions

	XD Models (with Adjustable Arm)		XN Models (without Arm)
	XDX 10	XDX 20	XDX 20
A	196 mm (7.5 in)	196 mm (7.5 in)	196 mm (7.5 in)
B	412 mm (16.2 in)	460 mm (18.1 in)	460 mm (18.1 in)
C	533 mm (21.0 in)	594 mm (23.4 in)	594 mm (23.4 in)
D	457 mm (18.0 in)	508 mm (20.0 in)	508 mm (20.0 in)
E	470 mm (18.5 in)	533 mm (21.0 in)	—
F	571 mm (22.5 in)	640 mm (25.2 in)	—

XD Models

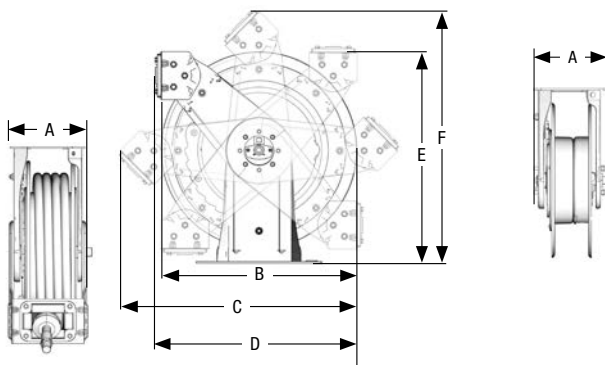


XN Models




Typical Mounting Configurations


Ceiling Mount

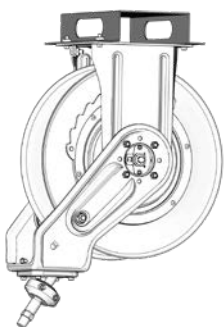


Wall Mount



Bench/
Truck Mount



Truck Mount with Remote Mounted Roller Guide



**Available in
4 Colors**

Consult factory
for lead times.

Metallic Blue (B)
Standard In-Stock Color



Yellow (F)



Black (D)



White (A)





ABOUT GRACO

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Distribution Center
Graco Distribution BV
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599

CHINA

Graco Fluid Equipment
(Shanghai) Co.,Ltd
Building 7, No. 1-2, Wenshui
Road 299
Jing'an District
Shanghai 200436
P.R. China
Tel: 86 512 6260 5711
Fax: 86 21 6495 0077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 432, Augusta Point
Regus Business Centre 53
Golf Course Road
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
38, Samsung 1-ro 1-gil
Hwaseong-si, Gyeonggi-do, 18449
Republic of Korea
Tel: 82 31 8015 0961
Fax: 82 31 613 9801

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.



Europe
+32 89 770 700
FAX +32 89 770 777
WWW.GRACO.COM

©2020 Graco Distribution BV 353050ENEU Rev. A 08/21 Printed in Europe.

All other brand names or marks are used for identification purposes and are trademarks of their respective owners. For more information on Graco's intellectual property, see www.graco.com/patent or www.graco.com/trademarks.