

Quick Connect Fitting Kit

3A6106A

ProMix PD Color Change Manifolds

EN



Important Safety Instructions

Read all warnings and instructions in manuals 332455. Save those instructions.


Hose-end connector kits provide quick and easy hose connection to Graco ProMix PD front-face color change manifold fluid ports without need of special tools or disconnection of surrounding hoses.

NOTE: Hose-end connector kits are only intended to be used with Graco ProMix PD front-face fluid ports of low- and high-pressure color change manifolds. It is not intended to be used on the color stack common inlet/outlet-end fluid port.

Part No. Description

- 26C295 Kit, Hose Connector, 1/4" npt, FX75 1500 psi
- 26C296 Kit, Hose Connector, 3/8" OD tube barb, FX75 300 psi*
- 26C297 Kit, Hose Connector, 1/4" npt, FFKM 1500 psi
- 26C298 Kit, Hose Connector, 3/8" OD tube barb, FFKM 300 psi*


* Compatible tubing rated to 225 psi

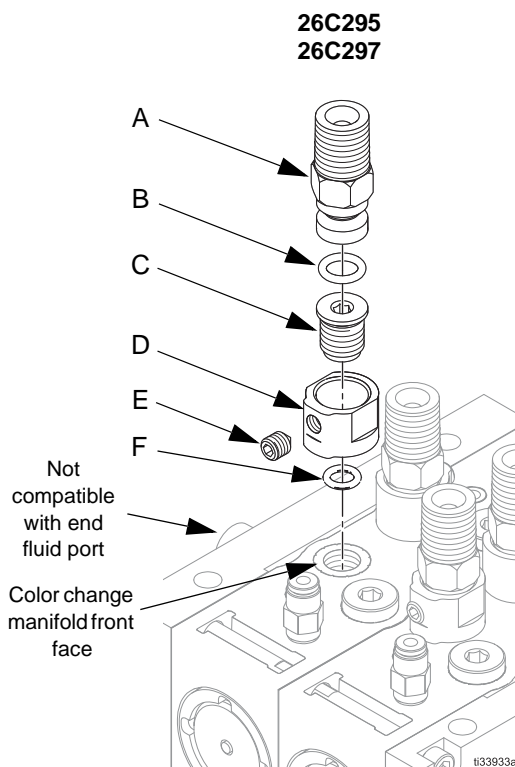

- A Hose coupling
- B FX75** or FFKM** o-ring
- C Outlet fitting
- D Housing
- E Setscrew*
- F PTFE** o-ring
- G Tube retainer nut

* Only use the setscrew provided with the kit. Point style and hardness are integral to long-term performance of the assembly.

** See Wetted Parts Construction for definition

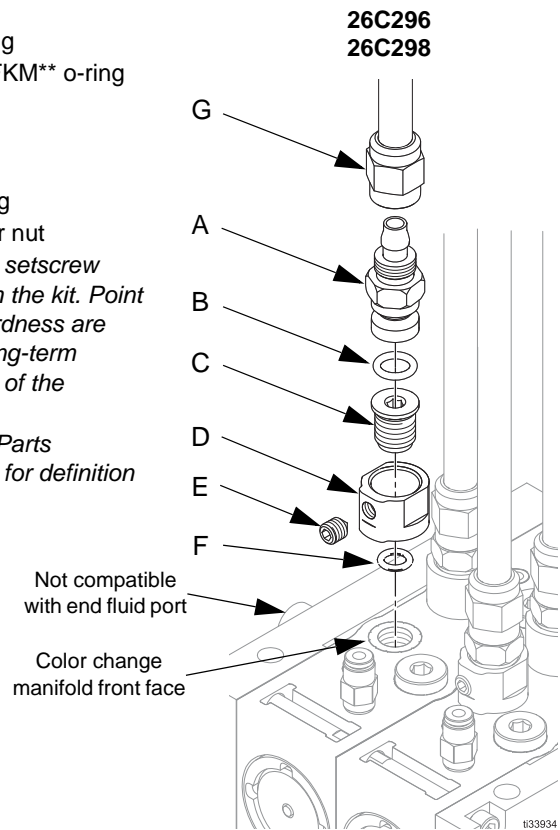

Assembly Instructions

1. Install the PTFE o-ring (F) to the outlet fitting (C).
2. Insert the outlet fitting (C), with the o-ring (F), into the housing (D).
3. Thread the outlet fitting (C) into the color change manifold, and orient the housing (D) so the setscrew (E) hole is accessible with a 3 mm hex torque tool.
4. Torque the outlet fitting (C) to 120 in-lb. using a 4 mm hex torque tool.
5. Connect the hose coupling (A) to the fluid hose. (Models 26C296 and 26C298 include a tube retaining nut (G) that is connected to the fluid hose and threaded into the hose coupling (A).)
6. Install the FX75 or FFKM o-ring (B) on the hose coupling (A). (Insert the hose coupling (A) into the housing (D) until the o-ring (B) contacts the bottom of the housing.)
7. Install the setscrew (E) into the housing (D) and torque to 50 in-lb. using a 3 mm hex torque tool.
8. Confirm the hose coupling (A) is sufficiently secure to prevent movement or rotation.

Wetted Parts Construction

316 SST, 17-4 SST, PTFE (polytetrafluoroethylene), and FX75 (chemically-resistant fluorocarbon) or FFKM (perfluoroelastomer).

Graco Information

For the latest information about Graco products, visit www.graco.com.

For patent information, see www.graco.com/patents.

TO PLACE AN ORDER, contact your Graco distributor or call to identify the nearest distributor.

Phone: 612-623-6921 **or Toll Free:** 1-800-328-0211 **Fax:** 612-378-3505

All written and visual data contained in this document reflects the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Original instructions. This manual contains English. MM 3A6106

Graco Headquarters: Minneapolis

International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA

Copyright 2017, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.

www.graco.com

Revision A, May 2018