

Gas Sprayers

Latin America Graco's Complete Line of Professional Gas Airless Sprayers



PROVEN QUALITY. LEADING TECHNOLOGY.

There is nothing like a Graco° sprayer.

Quality. Performance. Durability. Productivity.

Graco gas airless sprayers deliver on all counts. Whether vou're a contractor focused on small residential or a large contractor tackling the biggest projects every day, Graco offers you the best, most extensive line of painting equipment to meet your needs. Most importantly, when you choose Graco, you know that you are choosing the highest quality product in the industry. You can take pride in the fact that Graco gas sprayers are designed, manufactured, and assembled right here in the USA with imported Honda® engines. We do!



What is the G4 Difference? Simply put, it's Graco's commitment to provide you with the very best gas airless sprayers, backed by a solid reputation for proven quality, maximum performance, reliable warranty coverage and unmatched on-the-job productivity. Graco sprayers are designed to exceed the professional painting contractor's standards for quality and performance. Graco is the name to turn to today and as your business grows.

PROVENQUALITY

100% factory-tested and field-proven design, coupled with cutting-edge technology, keep Graco sprayers performing reliably on the job for years.

MAXIMUM **PERFORMANCE**

Higher output with superior control ensures the highest quality finish for every job.

INDUSTRY-LEADINGWARRANTY

Every Graco gas sprayer is backed by our full warranty coverage and more than 80 years of proven commitment to the professional contractor.

UNMATCHEDPRODUCTIVITY

Exclusive Endurance[™] pumps deliver long life and reliable performance, while the Endurance Advantage Program eliminates downtime by providing you a spare pump for quick job site change-out.

For patent information see www.graco.com/patents.



Choose the RIGHT SIZE when purchasing a Graco gas sprayer.

If you're a painting contractor who routinely handles residential, commercial, or industrial work, you need an airless sprayer that will deliver the best in performance and reliability. Graco's mission is to offer you the perfect sprayer that's sized for the work you do and will give you the results you expect. Use the Painting Solutions Guide below to help you choose which of Graco's gas sprayers is right for you. Whatever size you need, Graco has the absolute best airless sprayers in the industry.

- What types of material do you spray? In the future?
- How many gallons per week will you spray?
- How many guns do you now need? In the future?
- What hose lengths will you use?
- Will most jobs be indoors or outdoors?

- What tip sizes do you need?
- What power sources do you have available?
- What types of jobs will you bid?
- How much do you want to spend on a sprayer?
- On what types of surfaces will you spray (drywall, wood, concrete, steel, etc.)?

PAINTING SOLUTIONS GUIDE

| CLASSIFICATION: | ENTRY GAS | LARGE GAS | EXTREME-DUTY GAS |
|--------------------|--|---|---|
| SPRAYER MODEL: | GMAX™ 3400 | GMAX II 3900/5900/7900 GMAX II 5900 <i>Convertible</i> GH™ 130/200/230 <i>Convertible</i> GH 300 | GH 733 GH 833 GH 933 GH BIG RIG™S |
| TYPICAL JOBS: | Interior/Exterior Residential New Construction Repaint/Remodel Property Maintenance Light Commercial | Interior/Exterior Residential New Construction Heavy Commercial Industrial | Fire Proofing Heavy Commercial Industrial Roofing Water-Proofing |
| TYPICAL MATERIALS: | Latex Paints and Primers Acrylic Paints and Primers Oil-Based Paints and Primers | Latex Paints and Primers Acrylic Paints and Primers Oil-Based Paints and Primers Elastomerics Block Fillers and Gypsum Drywall Mud Dry Fall | Elastomerics Block Fillers and Gypsum Drywall Mud Epoxies and Sealers Asphalt and Aluminum Emulsion Water-Proofing Materials Intumescent |
| PRODUCTION RATE: | Medium 1 gun up to 0.027 tip up to 0.75 gpm | High up to 5 guns up to 0.057 tip up to 3.0 gpm | Highest up to 6 guns up to 0.065 tip up to 16.5 gpm |



Choose the RIGHT SERIES for all your painting applications.

Only Graco goes beyond size and offers three different series of airless sprayers that have features designed to make your work easier, faster and more productive. Whether you need the everyday reliability of our **Standard Series**, the increased speed and productivity of the **ProContractor Series**, or the extreme ruggedness of the **IronMan Series**, Graco offers the perfect sprayer that's designed from the ground up to meet your needs.

If You're a Small Residential and Repainting Contractor

- > You're painting multiple days a week
- > Your jobs are typically on the smaller side
- > You demand everyday reliability
- > You don't need a lot of extra features



EVERYDAY RELIABILITY



STANDARD SERIES

If You're a Large Residential and Commercial Contractor

You're painting every day You tackle medium to large projects You're moving frequently from job to job You need features that save you time and get you in, out, and on to the next job site







You need a **ProContractor**Series sprayer.

WORK SMARTER, FINISH MORE JOBS

If You're a Large Commercial and Industrial Contractor

You're painting continuously in less than ideal conditions You handle large, long-duration projects that require large volumes of material You keep your equipment on-site in paint You require extreme durability and reliability









m.graco.com/cedseriesvid

BEYOND JOBSITE TOUGH

NEW RESIDENTIAL AND REPAINT



Standard Series

When you're tackling painting projects multiple days a week, you demand reliability. Graco's Standard Series sprayers deliver durability and performance time after time. They handle the widest range of tip sizes, longer hose lengths and heavier coatings with ease.

All Standard Series sprayers come with these "Only On A Graco" features:

Honda[®] Engine Compact, lightweight, and powerful, Honda engines are reliable, technologically advanced, and easy to start.

- Oil Alert shuts down engine if oil level drops too low, preventing damage
- Contractor preferred

POWERED by

SmartControl[™] **3.0** Graco's advanced SmartControl 3.0 offers precision pressure control that delivers a consistent spray fan.

Lowest dead band at any pressure



SMARTCONTROL™

Rugged, Durable Cart Design

With a Graco sprayer, it's not just the mechanical parts that are built to last. Our carts are built to deliver years of performance.

- Thick chrome over steel withstands rugged environments
- Full pneumatic wheels absorb impacts and vibrations
- Retractable handle doubles as coiled hose storage

NEW RESIDENTIAL & REPAINT

Easy Out™ Pump Filter The Easy Out pump filter is designed to filter from the inside out so filters won't get stuck or collapse when filled with dirt or debris.

Large 19.5 square inch filtering area reduces tip clogs and ensures a quality finish

Vertical filter removes with the cap for less mess

5900





Advantage Drive[™] The drive is the critical link between the engine and the pump. Graco doesn't leave the manufacturing of our Advantage Drive System to others; rather, we design and manufacture them at our world-class manufacturing facility in the United States.

- Hardened steel gears run extremely quite
- The most durable, longest lasting drive in the industry
- Lifetime warranty

Endurance Pump Graco's Endurance Pump is the most rugged and reliable pump on the market today.

- ► Long-life V-Max Blue[™] packings
- Chromex[™] rod and stainless steel sleeve deliver superior reliability and life



Ready To Work Everything you need to get spraying—RAC X[™] SwitchTip[™], Contractor[™] gun and 50 feet of BlueMax[™] II hose is included.



LARGE RESIDENTIAL AND COMMERCIAL

Procontractor Series

When it comes to getting the most work done in a day, it's all about speed and high performance. And that's where Graco delivers. With features that enable you to work more efficiently, the ProContractor series of airless sprayers help you get in, out, and on to the next job site faster, saving you time and money.

ProContractor Series sprayers have all the Features of the Standard Series, **Plus:**



SmartControl 3.0 with LED Display Graco's advanced SmartControl 3.0 delivers a consistent spray fan

without pressure fluctuations at all spraying pressures.

 Bright, easy-to-read LED display shows pressure read-out, job/lifetime/gallon counter and self-diagnostics

WatchDog[™] The WatchDog Pump Protection System automatically shuts down the pump when paint runs out or if the hose is damaged.



Prevents dry pumping damage



Ready To Spray Everything you need—RAC X SwitchTip, Contractor gun and 100 feet of BlueMax II hose is already assembled and ready to use right out of the box, getting you working that much faster.



QuikReel[™] With the integrated QuikReel you can deploy and rewind up to 300 feet of hose in seconds, letting you put the sprayer where you want it and the gun where you need it.



900

- Hose guide eliminates twisting, kinking, and coiling for one-person operation
 - Hose is always connected and weight balanced to not tip over
 - Use only the hose you need the rest stays on the reel
 - Hand crank folds away for storage and one man loading





On-Board Toolbox Convenient storage container keeps tools, tips, filters and accessories where you need them most.



ProConnect™ 2 This next-generation pinless design of Graco's ProConnect Pump Removal and Installation System makes it easier and faster than ever to replace the pump in seconds.

- Eliminates costly job site downtime
- Quickly and easily swap out the pump for a spare

PRO CONNECT

 Pinless design needs no tools

LARGE COMMERCIAL AND INDUSTRIAL



IronManSeries

Power, Durability and **Capability** are what make an IronMan. With its rugged roll cage frame and mechanical components that are designed for continuous, hard use, the IronMan sprayers are built for the serious contractor who routinely handles large commercial and industrial jobs in less than ideal conditions.

IronMan Series sprayers have all the Features of the Standard Series, Plus:



SmartControl 3.0 with LED Display Graco's advanced SmartControl 3.0 delivers a consistent spray fan without pressure fluctuations at all spraying pressures.

 Bright, easy-to-read LED display shows pressure read-out, job/lifetime/gallon counter and self-diagnostics

WatchDog The WatchDog Pump Protection System automatically shuts down the pump when paint runs out or if the hose is damaged.

Prevents dry pumping damage



WD ON SmartControl





Flat-Proof

Tires These tires can't be punctured by nails, screws or other sharp debris. They will <u>never</u> go flat, leaving the sprayer stranded on a jobsite.



2 111111

Roll Cage Frame Design All IronMan sprayers

are built for the most brutal and demanding job sites.

- Heavy-duty roll cage frame withstands the most extreme abuse from industrial job sites
 - Crush-proof intake screen stands up to harsh impacts





ProConnect 2 This next-generation pinless design of Graco's ProConnect Pump Removal and Installation System makes it easier and faster than ever to replace the pump in seconds.

- Eliminates costly jobsite downtime
- Quickly and easily swap out the pump for a spare




Pinless design needs no tools

Extreme-Duty MaxLife® Pump

Built for the most demanding jobs, Graco's Extreme-Duty MaxLife Pump delivers unmatched durability and life.

- Lasts 6X longer between repacks
- Exclusive MaxLife sleeve and rod
- Oversized clearances ensure minimal pressure drop and increased performance



▶ Both long-life ceramic and stainless steel ball sets included for maximum versatility no matter what you're spraying

MAXLIE



Heavy-Duty Hose and Gun 100 feet of highperformance BlueMax II airless hose and a Silver Plus gun that can handle spraying heavier materials are included with every IronMan sprayer.

GMAX 3400

With a 120 cc Honda engine, the GMAX 3400 is the perfect sprayer for the entry-level contractor who is looking for maximum power in a lightweight, portable package.

| SERIES Standard | PART # 16W863 |
|---------------------------------|-------------------------|
| SPECIFICATIONS Max TIP Size: | 0.027–1 Gun |
| MAX GPM (LPM): | 0.75 (2.8) |
| MAX PSI (BAR): | 3300 (227) |
| ENGINE CC (HP): | Honda 120 (4.0) |
| | |

INCLUDES

Contractor Gun

RAC X 517 SwitchTip[™] and Guard

 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax[™] II Airless Hose





Standard Series GMAX **3400** and GMAX II **3900** features found Only On A Graco:

Advantage Drive System Runs quiet and has a lifetime guarantee.

SmartControl 3.0 Pressure Control Delivers consistent spray fan without pressure fluctuations at all spraying pressures.

Endurance Pump Amazingly durable design lasts twice as long as the next leading brand.

Honda Engine Delivers maximum performance and contractor preferred reliability.

Rugged Cart Design Chrome over steel makes this durable cart last for years.

Easy Out Pump Filter Less mess when changing or cleaning the filter.

Heavy-Duty Prime Valve Maintenance-free design withstands high pressure dumping.



With a 120 cc Honda engine and additional features for increased productivity, the GMAX II 3900 can handle up to two guns and is ideal for the professional contractor who sprays a wide variety of coatings.

SERIES STANDARD PROCONTRACTOR LO-BOY

16W867 16W866

PART #

16W865

SPECIFICATIONS MAX TIP SIZE: MAX GPM (LPM):

MAX PSI (BAR):

ENGINE CC (HP):

0.036–1 Gun 0.023–2 Guns 1.25 (4.7) 3300 (227)

Honda 120 (4.0)

INCLUDES

STANDARD SERIES AND LO-BOY UNITS:

- Contractor Gun
- RAC X 517 SwitchTip and Guard
 1/4 in x 50 ft (6.4 mm x 15 m)
- BlueMax II Airless Hose

PROCONTRACTOR SERIES UNIT:

- Contractor Gun
 RAC X 517 SwitchTip and Guard
- 1/4 in x 50 ft (6.4 mm x 15 m)
- BlueMax II Airless Hose AND
- 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless Hose









Also available in Lo-Boy configuration with ProConnect Pump System.

ProContractor Series

All the features of the

Standard_{Series},

QuikReel Deploy and rewind up to 300 feet of hose in seconds without twists, kinks or coils.

Ready To Spray A total of 100 feet of hose and gun already installed.

ProConnect 2 Change out the pump using no tools in seconds resulting in quickly getting back to work.

LED Display Bright easy-to-read LED display shows pressure readout, job/lifetime/ gallon counter and self diagnostics.

WatchDog Save the pump from damage when paint runs out or a hose breaks.

On-Board Toolbox End frustration and save time by never again searching for tips, filters, and tools.



GMAX II 5900

With a 160 cc Honda engine and the ability to spray up to 1.6 gallons per minute, the GMAX II 5900 is the industry standard for the professional contractor who sprays a wide variety of coatings on residential, commercial, and industrial jobs.

| SERIES | PART # |
|-----------------|------------------------------|
| STANDARD | 16W869 |
| PROCONTRACTOR | 16W871 |
| IRONMAN | 16W881 |
| CONVERTIBLE | 16W873 |
| LO-BOY | 16W870 |
| SPECIFICATIONS | |
| MAX TIP SIZE: | 0.043-1 Gun |
| | 0.029–2 Guns 0.023–3 Guns |
| | |
| MAX GPM (LPM): | 1.60 (6.0) |
| MAX PSI (BAR): | 3300 (227) |
| ENGINE CC (HP): | Honda 200 (6. |
| | |

INCLUDES

STANDARD SERIES, CONVERTIBLE AND LO-BOY UNITS:

Contractor Gun

- RAC X 517 SwitchTip and Guard
- 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless Hose
- PROCONTRACTOR SERIES UNIT:
- Contractor Gun
- RAC X 517 SwitchTip and Guard
- 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless Hose AND
- 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless Hose

IRONMAN SERIES UNIT:

- Silver Plus Gun
- RAC X 517 SwitchTip and Guard
- RAC X Wide RAC 1231 SwitchTip
 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Airless Hose AND
- 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless Hose





Also available in Lo-Boy configuration with ProConnect Pump System.

Standard Series features found Only On A Graco:

Advantage Drive System Runs quiet and has a lifetime guarantee.

SmartControl 3.0 Pressure Control

Delivers consistent spray fan without pressure fluctuations at all spraying pressures.

Endurance Pump Amazingly durable design lasts twice as long as the next leading brand.

Honda Engine Delivers maximum performance and contractor preferred reliability.

Rugged Cart Design Chrome over steel makes this durable cart last for years.

Easy Out Pump Filter Less mess when changing or cleaning the filter.

Heavy-Duty Prime Valve Maintenancefree design withstands high pressure dumping.

> Choose a Series that's built **FOR YOU!**



Prof.

All the features





of the Standard Series, **PLUS:**

QuikReel Deploy and rewind up to 300 feet of hose in seconds with out twists, kinks or coils.

Ready To Spray A total of 100 feet of hose and gun already installed.

ProConnect 2 Change out the pump using no tools in seconds resulting in quickly getting back to work.

LED Display Bright easy-to-read LED display shows pressure readout, job/lifetime/gallon counter and self diagnostics.

WatchDog Save the pump from damage when paint runs out or a hose breaks.

On-Board Toolbox End frustration and save time by never again searching for tips, filters, and tools.





All the features of the Standard Series, **PLUS:**

MaxLife Extreme Duty Pump

Keeps you working by running *6X longer* between repacks.

Ceramic and Stainless Steel

Ball Set Ceramic and stainless steel ball sets provide maximum versatility no matter what you're spraying.

ProConnect 2 Change out the pump using no tools in seconds resulting in quickly getting back to work.

Roll Cage Frame Innovative steel design withstands rugged environments and protects critical sprayer components.

LED Display Bright easy-to-read LED display shows pressure readout, job/lifetime/gallon counter and self diagnostics.

Flat-Proof Tires Roll through even the worst jobsite debris without ever going flat.

WatchDog Save the pump from damage when paint runs out or if a hose breaks.

Additional 50 ft of Hose Gives you the versatility to work farther away from the sprayer.

GMAX II 7900

With a 200 cc Honda engine and the ability to spray up to 2.2 gallons per minute, the GMAX 7900 is Graco's largest gas mechanical sprayer. All 7900 sprayers come equipped with Graco's Extreme-Duty MaxLife pump, and they can handle the widest range of tip sizes, multiple guns, longer hose lengths and heavier coatings with ease.

| SERIES | PART # |
|-----------------|-----------------|
| STANDARD | 16W883 |
| PROCONTRACTOR | 16W885 |
| IRONMAN | 16W887 |
| LO-BOY | 16W884 |
| SPECIFICATIONS | |
| MAX TIP SIZE: | 0.048-1 Gun |
| | 0.035-2 Guns |
| | 0.027-3 Guns |
| | 0.023-4 Guns |
| MAX GPM (LPM): | 2.20 (8.3) |
| MAX PSI (BAR): | 3300 (227) |
| ENGINE CC (HP): | Honda 200 (6.5) |

INCLUDES

STANDARD SERIES AND LO-BOY UNITS:

- Contractor Gun
- RAC X 517 SwitchTip and Guard
 3/8 in x 50 ft (9.5 mm x 15 m)
- BlueMax II Airless Hose • 1/4 in x 3 ft (6.4 mm x 0.9 m)

PROCONTRACTOR SERIES UNIT:

Contractor Gun

BlueMax II Whip

- RAC X 517 SwitchTip and Guard
- 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Airless Hose AND
- 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless Hose

IRONMAN SERIES UNIT:

Silver Plus Gun

- RAC X 517 SwitchTip and Guard
- RAC X Wide RAC 1231 SwitchTip
 3/8 in x 50 ft (9.5 mm x 15 m)
- BlueMax II Airless Hose AND
- 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless Hose





Also available in Lo-Boy configuration with ProConnect Pump System.



Standard Series features found Only On A Graco:

Advantage Drive System Runs quiet and has a lifetime guarantee.

SmartControl 3.0 Pressure Control

Delivers consistent spray fan without pressure fluctuations at all spraying pressures.

MaxLife Extreme-Duty Pump Keeps you working by running *6X longer* between repacks. **Honda Engine** Delivers maximum performance and contractor preferred reliability.

Rugged Cart Design Chrome over steel makes this durable cart last for years.

Easy Out Pump Filter Less mess when changing or cleaning the filter.

Heavy-Duty Prime Valve Maintenancefree design withstands high pressure dumping.

Choose a Series that's built FOR YOU!





All the features





of the Standard Series, **PLUS:**

QuikReel Deploy and rewind up to 300 feet of hose in seconds with out twists, kinks or coils.

Ready To Spray A total of 100 feet of hose and gun already installed.

ProConnect 2 Change out the pump using no tools in seconds resulting in quickly getting back to work.

LED Display Bright easy-to-read LED display shows pressure readout, job/lifetime/gallon counter and self diagnostics.

WatchDog Save the pump from damage when paint runs out or a hose breaks.

On-Board Toolbox End frustration and save time by never again searching for tips, filters, and tools.





All the features of the Standard Series, **PLUS:**

Ceramic and Stainless Steel

Ball Set Ceramic and stainless steel ball sets provide maximum versatility no matter what you're spraying.

ProConnect 2 Change out the pump using no tools in seconds resulting in quickly getting back to work.

Roll Cage Frame Innovative steel design withstands rugged environments and protects critical sprayer components.

LED Display Bright easy-to-read LED display shows pressure readout, job/lifetime/gallon counter and self diagnostics.

Flat-Proof Tires Roll through even the worst jobsite debris without ever going flat.

WatchDog Save the pump from damage when paint runs out or if a hose breaks.

Additional 50 ft of Hose Gives you the versatility to work farther away from the sprayer.

GH 130 Convertible

GH Series sprayers are powerful hydraulic units for high production contractors spraying a wide range of material from latex and acrylics to elastomerics and block fillers on large commercial jobs. With the ability to change out the pump lower and convert to electric power without tools, you can be assured that you have the most versatile sprayer on the market today.

DESCRIPTION GH 130 Convertible PART # 253957

GH 130 *Convertible* with Electric Motor Kit (Non CSA) 253959

GH 130 *Convertible* with Electric Motor Kit (CSA) 253980

| SPECIFICATIONS | (with Gas Engine) |
|-----------------|-------------------|
| MAX TIP SIZE: | 0.037–1 Gun |
| | 0.023–2 Guns |
| MAX GPM (LPM): | 1.30 (4.9) |
| MAX PSI (BAR): | 3300 (227) |
| ENGINE CC (HP): | Honda 120 (4.0) |

SPECIFICATIONS (with Electric Motor) MAX TIP SIZE: 0.031

MAX GPM (LPM): 1.10 (4.2)

INCLUDES

- Contractor Gun
- RAC X 517 SwitchTip and Guard
- 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless Hose



The ability to convert from gas to electric in seconds without any tools!



Features found "Only On A Graco" GH *Convertible* Sprayer



High Capacity Cooling System

- Innovative hydraulic reservoir
- No special hydraulic fluid needed
- Cooling fins on reservoir deflect heat away from sprayer

Indoor or Outdoor Use

Swap the gas engine for a TEFC electric motor in seconds

PRD -

POWERED by

HONDA

CONNECT

Exclusive ProConnect Pump Removal and Installation System

- Quickly swap out the pump for a spare in seconds
- No tools needed
- ► Eliminates costly jobsite downtime

Honda Engine

Contractor preferred

- Compact, lightweight, and reliable engine is easy to start
- Oil Alert shuts down engine if oil level drops too low, preventing damage

Easy Out Pump Filter and Crush-Proof Rock Catcher

- Reduces tip clogs and ensures a quality finish
- Filter removes with the cap, meaning less mess during filter changes
- Filters from the inside out, so the filter won't get stuck or collapse when dirty
- Exclusive crush-proof rock catcher provides unmatched pump protection

High Efficiency Hydraulic Pump

- ► Faster, more responsive changeover
- ▶ 100% 0-ring sealed fittings prevent leaks
- Fewer moving parts mean less maintenance and longer life







GH 200 Convertible

| DESCRIPTION GH 200 <i>Convertible</i> | PART # 253962 |
|--|-------------------------|
| GH 200 <i>Convertible</i> with Electric Moto Kit (Non CSA) | r 253963 |
| GH 200 <i>Convertible</i> with Electric Moto Kit (CSA) | r 253981 |
| SPECIFICATIONS MAX TIP SIZE: | |
| | 0.034–2 Gun |

| | 0.034–2 Guns 0.027–3 Guns |
|------------------------------------|------------------------------|
| MAX GPM (LPM): | 0.023–4 Guns 2.15 (8.14) |
| MAX OF W (LF W). MAX PSI (BAR): | 3300 (227) |
| ENGINE CC (HP): | Honda 160 (5.5 |
| | |

SPECIFICATIONS (with Electric Motor) MAX TIP SIZE: 0.031

MAX GPM (LPM): 1.10 (4.2)

INCLUDES

- Contractor Gun
- RAC X 517 SwitchTip and Guard
- 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless Hose





Key Features of the GH 200 *Convertible*

65% higher output flow and 33% larger engine

than the GH 130 Convertible making it ideal for heavier coatings

MaxLife Pump

- ► Exclusive MaxLife rod sleeve delivers unmatched durability
- ► Runs 6X longer between repacks

Eliminates costly jobsite downtime

> Oversized clearances ensure minimal pressure drop and increased performance

Exclusive ProConnect Pump Removal and Installation System

- Quickly swap out the pump for a spare in seconds
- No tools needed

PRD - CONNECT



The ability to convert from gas to electric in seconds without any tools!

石 Convertible

DESCRIPTION PART # GH 230 Convertible 253965 GH 230 Convertible with Electric Motor

Kit (Non CSA) 253966 GH 230 Convertible

with Electric Motor Kit (CSA) 253982

| (with Gas Engine) |
|-----------------------|
| 0.053–1 Gun |
| 0.038-2 Guns |
| 0.032–3 Guns |
| 0.028–4 Guns |
| 0.024–5 Guns |
| 2.35 (8.9) |
| 3300 (227) |
| Honda 220 (6.5) |
| (with Electric Motor) |
| 0.031 |
| |

1.10 (4.2)

MAX GPM (LPM):

INCLUDES

- Silver Plus Gun
 RAC X 517 SwitchTip and Guard
 3/8 in x 50 ft (9.5 mm x 15 m)
- **BlueMax II Airless Hose**
- 1/4 in x 3 ft (6.4 mm x 0.9 m) BlueMax II Whip Hose

The ability to convert from gas to electric in seconds without any tools!

Key Features of the GH 230 Convertible

10% more performance and 25% larger engine

than the GH 200 Convertible

MaxLife Pump

- Exclusive MaxLife sleeve and MaxLife rod delivers unmatched durability
- Runs 6X longer between repacks
- Oversized clearances ensure minimal pressure drop and increased performance

Exclusive ProConnect Pump Removal and Installation System

- Quickly swap out the pump for a spare in seconds
- No tools needed Eliminates costly job site downtime
- PRD 🛛 CONNECT[®]



Silver Plus Gun

Larger passages and less obstructions result in maximum material flow

Larger Hose Included

- Larger 3/8 inch (9.5 mm) BlueMax II Airless Hose
- Additional 1/4 in x 3 ft (6.4 mm x 1.8 m) BlueMax II Whip Hose included



Gł DESCRIPTION PART # GH 300 253968 **SPECIFICATIONS** MAX TIP SIZE: 0.057-1 Gun 0.039-2 Guns 0.033–3 Guns 0.029–4 Guns 0.025-5 Guns MAX GPM (LPM): 3.0 (11.4) MAX PSI (BAR): 3300 (227) **ENGINE CC (HP):** Honda 270 (9.0) **INCLUDES** Silver Plus Gun • RAC X 517 SwitchTip and Guard • 3/8 in x 50 ft (9.5 mm x 15 m) **BlueMax II Airless Hose**

• 1/4 in x 3 ft (6.4 mm x 0.9 m) BlueMax II Whip Hose



Key Features of the GH 300

28% higher output flow and 35% larger engine

than the GH 230 Convertible making it ideal for heavier coatings

MaxLife Pump

- Exclusive MaxLife sleeve and MaxLife rod delivers unmatched durability
- Runs 6X longer between repacks
- > Oversized clearances ensure minimal pressure drop and increased performance

Exclusive ProConnect Pump Removal and Installation System

- Quickly swap out the pump for a spare in seconds
- No tools needed
- Eliminates costly job site downtime

Silver Plus Gun

 Larger passages and less obstructions result in maximum material flow

Larger Hose Included

- Larger 3/8 inch (9.5 mm) BlueMax II Airless Hose
- Additional 1/4 in x 3 ft (6.4 mm x 1.8 m) BlueMax II Whip Hose included





CONNECT

GH 833

The GH 833 is the preferred choice for high-production professional contractors who spray a wide range of materials. The job site-proven workhorse is the answer when you demand ruggedness, performance and value.

| DESCRIPTION Bare | PART # 249318 |
|---|---------------------------|
| COMPLETE | 249617 |
| BARE Electric Start | 16U287 |
| COMPLETE ELECTRIC START | 16U288 |
| OEM (Hydraulic Engine and Displacen | 249767 nent Pump Only) |
| SPECIFICATIONS | |

MAX TIP SIZE: 0.065–1 Gun 0.046–2 Guns 0.037–3 Guns 0.032–4 Guns 0.029–5 Guns 0.026–6 Guns MAX GPM (LPM): 4.0 (15.1) MAX PSI (BAR): 4000 (276)

ENGINE CC (HP): Honda 390 (13.0)

COMPLETE SPRAYER INCLUDES

- Silver Plus Gun
 RAC X 517, RAC X 655 SwitchTips and Guard
- 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II HP Airless Hose
- 1/4 in x 3 ft (6.4 mm x 0.9 m) BlueMax II Whip Hose

ADDITIONAL FEATURES

- Lockable pressure control knob
 Grounding wire for safety with
- solvent materials • Huge 1.5-inch diameter siphon hose
- Huge 1.5-inch diameter siphon nosi
 Oversized 1-inch porting on
- displacement pump





Direct Immersion Kit allows ultimate flexibility with tough-tospray materials. (Part #287843)

Features

Heavy-Duty Cooling System

- Large 4-gallon hydraulic reservoir
- Return line hydraulic filter extends life
- ► No special hydraulic fluid needed
- Proven cooler and blower system
- Easy to use drain plug

Heavy-Duty Graco Hydraulic System

- ► Faster, more responsive changeover
- ► 0-ring sealed to eliminate leaks
- ► High-precision pressure control
- No hydraulic reset button needed
- Durable hydraulic lines for long life

Honda Engine with Electric Start* (*ES models only)

- 390 cc (13 hp) engine with integrated fuel tank delivers maximum performance
- Oil Alert shuts down engine if oil level drops too low, preventing damage
- ▶ Back-up pull start
- ▶ High-capacity, 12 volt 18 amp charging system*

Heavy-Duty Frame

- Easy-roll tubed pneumatic tires
- ► Enamel-painted steel tubing resists corrosion
- Multi-function design converts to skid mount in seconds

Exclusive MaxLife Pump (Available on GH 833 model only)



- Exclusive MaxLife rod and sleeve delivers unmatched durability and life—Graco's best
- Only 16 cycles per gallon
- Exclusive QuikChange Pump System and QuikAccess Intake Valve eliminate downtime
- Oversized clearances ensure minimal pressure drop and increased performance

Flow-Through Filter System (Available on GH 833 model only)

- Reduces tip clogs and ensures a quality finish
- Filters from the inside out, so the filter won't get stuck or collapse when dirty



SPRAYERS

933

DESCRIPTION PART # BARE 16U281 COMPLETE 160282 **BARE ELECTRIC START** 16U285 **COMPLETE ELECTRIC START 16U286**

SPECIFICATIONS

MAX TIP SIZE: MAX GPM (LPM):

MAX PSI (BAR):

ENGINE CC (HP):

2.5 (9.5) 7250 (500) Honda 390 (13.0)

0.065

COMPLETE SPRAYER INCLUDES

• XTR 704 Gun

- XHD 519 SwitchTips and Guard • 3/8 in x 50 ft (9.5 mm x 15 m)
- **Xtreme-Duty** Airless Hose
 - 1/4 in x 6 ft (6.4 mm x 1.8 m) **Xtreme-Duty Airless Hose**

DESCRIPTION **BARE ELECTRIC START** PART # 16U279

SPECIFICATIONS MAX GPM (LPM): MAX PSI (BAR):

4.0 (15.1) 4000 (276)

PART #

16U277

16.5 (62.5)

1000 (7.0)

DESCRIPTION BARE ELECTRIC START

SPECIFICATIONS MAX GPM (LPM): MAX PSI (BAR):

DESCRIPTION BARE ELECTRIC START

SPECIFICATIONS MAX GPM (LPM):

MAX PSI (BAR):

PART # 16U278 7.0 (26.5)

2500 (172)

DESCRIPTION PART # **ELECTRIC START** 16U280

SPECIFICATIONS MAX GPM (LPM): MAX PSI (BAR):

BARE

3.5 (13.2) 5000 (345)

Introducing the ALL NEW Big Rig Sprayers!

For 30 years, contractors have turned to the GH line of gas hydraulic sprayers when they needed maximum performance and unmatched versatility. The tradition continues with the GH Big Rig* sprayers. Equipped with exclusive QuikChange[™] Lowers, each Big Rig sprayer can easily be customized for each coating, eliminating the need to purchase additional rigs. Whether you require

high pressure for long hose runs and hard-to-atomize materials, or high flow rates for heavier coverage, turn to the GH Big Rig sprayers to get the job done.

*See GH Big Rig Sprayers Brochure (Part #342550) for the complete line of GH Big Rig sprayers and other sprayer configurations.






GH 933Es Big Rig model

Accessories Gas Airless Sprayers

In addition to the industry's best sprayers, Graco makes the accessories that enable you to work faster and more productively. From rugged guns and tips to hoses and extensions, Graco's accessories let you customize your sprayer for the maximum performance that best suits your work.


RAC TIPS AND GUARDS

- 286-XXX RAC 5 SwitchTips, Black (Odd #) Ideal for residential, commercial and industrial jobs. Maximum Working Pressure: 4050 psi (279 bar, 27.9 MPa)
- 243161 RAC 5 HandTite Guard 7/8 in (22 mm) thread size, standard Graco thread
- 243263 RAC 5 HandTite Guard 11/16 in (17 mm) thread size, older style Graco pole guns, fits competitive guns with 11/16 in (17 mm) threads



- Maximum Working Pressure: 4050 psi (279 bar, 27.9 MPa) WR-XXXX RAC X Wide RAC SwitchTips, Blue (Odd #) 24 in (610 mm) spray fan for maximum coverage and productivity. Maximum Working Pressure: 4050 psi (279 bar, 27.9 MPa)
- **246215** RAC X HandTite[™] Guard 7/8 in (22 mm) thread size, standard Graco thread
- **246437 RAC X HandTite Guard** 11/16 in (17 mm) thread size, older style Graco pole guns, fits competitive guns with 11/16 in (17 mm) threads

CONTRACTOR/FTx GUNS Designed by Graco to be the longest-lasting guns on the market, the Contractor and FTx Guns continue to be the number one choice of painting contractors. With features like the FlexSeal design, Easy Out Gun Filter and EasyGlide Swivel, no wonder these are the contractors choice in guns.

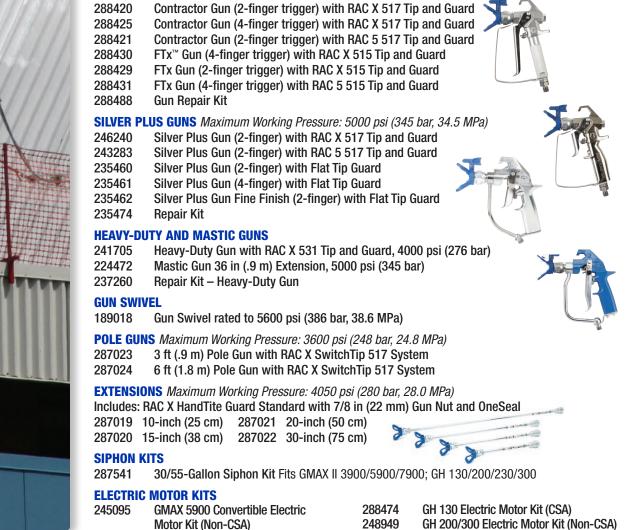



245096

| • • | |
|-----|-------------------------------------|
| 6 | GMAX 5900 Convertible Electric |
| | Notor Kit (Non-CSA) |
| 6 | GMAX 5900 Convertible Electric |
| Ν | Notor Kit (CSA) |
| 6 | GH 130 Electric Motor Kit (Non-CSA) |

| 288474 | GH 130 Electric Motor Kit (CSA) |
|--------|---|
| 248949 | GH 200/300 Electric Motor Kit (Non-CSA) |
| 248949 | GH 200/300 Electric Motor Kit (Non-CSA) |
| 248950 | GH 200/300 Electric Motor Kit (CSA) |

GH 833 KITS*

- 287843 Direct Immersion Kit; Includes: Hydraulic Feed Lines, Stinger Tube and Lift Bracket
- 249767 OEM Kit; Includes: Hydraulic Engine/Head, Displacement Pump
- 287916 Non-Solvent Siphon Kit, 1.5 in diameter x 6.5 ft (2 m) Siphon Hose
- 287915 Solvent Resistant Siphon Kit, 1.5 in diameter x 6.5 ft (2 m) Siphon Hose

GH 733, GH 933, GH 2570, GH 5040 KITS*

- Direct Immersion Kit; Includes: Hydraulic Feed Lines, Stinger Tube and Lift Bracket 287843 Fits GH 733, GH 833, GH 933 and GH 5040
- Direct Immersion Kit; Includes: Hydraulic Feed Lines, Stinger Tube and Lift Bracket 160764 Fits GH 2570
- 16U505 12 Gallon Stainless Steel Material Hopper Kit Fits GH 733, GH 933 and GH 5040
- 287936 Non-Solvent Siphon Kit, 2 in diameter x 6.5 ft (2 m) Siphon Hose

GUN HOSE KITS – KITS INCLUDE THE FOLLOWING UNLESS OTHERWISE NOTED

Airless Gun, RAC X 517 Tip and Guard, 1/4 in x 50 ft (6.4 mm x 15 m) 3300 psi (227 bar) BlueMax II Airless Hose and 3 ft (0.9 m) Whip Hose

- 288489 **Contractor Gun Hose Kit**
- 288496 Contractor Gun Hose Kit with RAC 5
- 288490 Contractor Gun Hose Kit with 3/8 in x 50 ft (9.5 mm x 15 m) 3300 psi (227 bar) BlueMax II Airless Hose

288493 FTx Gun Hose Kit with RAC X 515 Tip (Whip Hose Excluded)

- 288497 FTx Gun Hose Kit with RAC 5 515 Tip (Whip Hose Excluded)
- 287095 Flex Plus[™] Gun Hose Kit
- 287041 Silver Plus Gun Hose Kit
- 287042 Silver Plus Gun Hose Kit with 3/8 in x 50 ft (9.5 mm x 15 m) 3300 psi (227 bar) BlueMax II Airless Hose
- 287043 Silver Plus Gun Hose Kit with 3/8 in x 50 ft (9.5 mm x 15 m) 4000 psi (276 bar) BlueMax II Airless Hose
- 287850 Silver Plus Gun Hose Kit with RAC X SwitchTip, 3/8 in x 50 ft (9.5 mm x 15 m) 3300 psi (227 bar) Hose
- 287851 Flex Plus Gun Hose Kit with RAC X 655 and 531 SwitchTip, 3/8 in x 50 ft (9.5 mm x 15 m) 4000 psi (276 bar) Hose and Whip Hose
- 287852 Heavy-Duty Gun Hose Kit with RAC X 655 and 531 SwitchTip, 3/8 in x 50 ft (9.5 mm x 15 m) 4000 psi (276 bar) Hose and Whip Hose

BLUEMAX II AIRLESS HOSE To maximize results, choose the high performance BlueMax II Airless Hose. Lighter weight and increased hose flexibility improves usability when spraying under pressure. With superior flexibility and durability, BlueMax II ensures you get the best results from your airless sprayer.

- 238358 3/16 in x 3 ft (4.8 mm x 0.9 m) BlueMax II 3300 psi (227 bar) Airless Whip Hose 238959 3/16 in x 4.5 ft (4.8 mm x 1.4 m) BlueMax II 3300 psi (227 bar) Airless Whip Hose
- 240793
- 1/4 in x 25 ft (6.4 mm x 7.5 m) BlueMax II 3300 psi (227 bar) Airless Hose 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II 3300 psi (227 bar) Airless Hose
- 240794 240797 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II 3300 psi (227 bar) Airless Hose

BLUEMAX II HIGH PRESSURE HOSE Maximum Working Pressure: 4000 psi (276 bar)

- 277249 1/4 in x 3 ft (6.4 mm x 0.9 m) MxF Whip Hose
- 277250 1/4 in x 50 ft (6.4 mm x 15 m) FBE
- 277351 3/8 in x 3 ft (9.5 mm x 0.9 m) MxF Whip Hose
- 277251 3/8 in x 50 ft (9.5 mm x 15 m) FBE
- 277253 1/2 in x 50 ft (13 mm x 15 m) FBE

PUMP ARMOR[™]/TSL[™] Maintaining your pump is essential for long life and reliability. Graco has made pump maintenance simple with our complete line of fluids. Pump Armor is a storage solution which protects your pump from the damaging effects of corrosion during storage. TSL (Throat Seal Liquid) prevents dried paint from accumulating on the pump rod—extending the life of the pump packings.

243103 Pump Armor – 1 gt (1 l) Pump Armor - 1 gal (3.8 l) 245133 206994 Throat Seal Liquid (TSL) - 8 oz (.24 l) 206995 Throat Seal Liquid (TSL) - 1 gt (1 l) 206996 Throat Seal Liquid (TSL) - 1 gal (3.8 l)



*See GH Big Rig Sprayers Brochure 342550 for complete line of GH Big Rig Sprayers sprayers and other sprayer configurations.

Ask your local authorized Graco Distributor for details on our complete line of airless accessories.













GAS AIRLESS SPRAYER SPECIFICATIONS

| | | GH 130 | GH 200 | GH 230 | GH 300 | GH 833 | GH 933 |
|----------------|---|------------------------------------|--|---|--|--|--|
| | Maximum Tip Size | 0.037 | 0.047 | 0.053 | 0.057 | 0.065 | 0.053 |
| | Maximum psi (bar) | 3300 (227) | 3300 (227) | 3300 (227) | 3300 (227) | 4000 (276) | 7250 (500) |
| | Maximum gpm (lpm) | 1.30 (4.9) | 2.15 (8.14) | 2.35 (8.9) | 3.00 (11.4) | 4.00 (15.1) | 2.50 (9.5) |
| | Honda Engine cc (hp) | 120 (4.0) | 160 (5.5) | 200 (6.5) | 270 (9.0) | 390 (13.0) | 390 (13.0) |
| SNOI | Weight Ib (kg) | 150 (68) | 160 (72) | 168 (76) | 195 (88) | N/A | N/A |
| SPECIFICATIONS | Gun Support (Gas): 1 Gun 2 Guns 3 Guns 4 Guns 5 Guns 6 Guns | 0.037 0.023 — — — — | 0.047 0.034 0.027 0.023 — — | 0.053 0.038 0.032 0.028 0.024 | 0.057 0.039 0.033 0.029 0.025 — | 0.065 0.046 0.037 0.032 0.029 0.026 | 0.053 0.038 0.032 0.028 0.024 — |
| | Gun Support (Elec.): 1 Gun 2 Guns | 0.031 0.017 | 0.031 0.017 | 0.031 0.017 | N/A | N/A | N/A |











| MODEL | Cart Design– Part Number | Stand–253957 w/Electric Motor (Non CSA)–253959 w/Electric Motor (CSA)–253980 | Stand–253962 w/Electric Motor (Non CSA)–253963 w/Electric Motor (CSA)–253981 | Stand–253965 w/Electric Motor (Non CSA)–253966 w/Electric Motor (CSA)–253982 | Stand-253968 | Bare-249318 Complete-249617 Bare ES-16U287 Complete ES-16U288 OEM Kit-249767 | Bare–16U281 Complete–16U282 Bare ES–16U285 |
|--------------------|-----------------------------|--|--|--|--|--|--|
| | Gun | Contractor | Contractor | Silver Plus | Silver Plus | Silver Plus | XTR704 |
| INCLUDES | Hose | 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless | 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless | BlueMax II Airless AND | 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Airless <i>AND</i> 1/4 in x 3 ft (6.4 mm x 0.9 m) BlueMax II Whip Hose | BlueMax II Airless AND | 3/8 in x 50 ft (9.5 mm x 15 m) Xtreme-Duty Airless <i>AND</i> 1/4 in x 6 ft (6.4 mm x 1.8 m) Xtreme-Duty Airless Whip Hose |
| - | Тір | RAC X 517 SwitchTip and Guard | RAC X 517 SwitchTip and Guard | XHD 519 SwitchTip and Guard |
| | Filter | Easy Out | Easy Out | Easy Out | Easy Out | Easy Out | Easy Out |
| dl | Туре | Endurance Piston QuikChange System | Endurance Piston ProConnect | Endurance Piston ProConnect | Endurance Piston ProConnect | Endurance Piston QuikChange System | QuikChange System |
| PUMP | Rod | Chromex | MaxLife | MaxLife | MaxLife | MaxLife | Chromex |
| | Cylinder | Hardened SST | MaxLife | MaxLife | MaxLife | Hardened SST | Hardened Chrome |
| CONTROL & DRIVE | Control | Hydraulic | Hydraulic | Hydraulic | Hydraulic | Hydraulic | Hydraulic |
| ENDURANCE | Replacement Pump | 24B748 | 288467 | 288468 | 288468 | - | - |
| s | Repair Kit | 288471 | 287813 | 287813 | 287813 | - | - |
| PART | Rod | 288479 | 288469 | 288470 | 288470 | - | - |
| WEAR PARTS | Sleeve | 248210 | 249121 | 287817 | 287817 | - | - |
| 3 | Intake Seat Kit | 244199 | 240918 | 240918 | 240918 | - | - |
| IUAL | Operation | 311791 | 311791 | 311791 | 311791 | - | - |
| MANUAL | Parts | 311797 | 311797 | 311797 | 311797 | - | - |

| | | GMAX 3400 |
|----------------|---|------------------|
| | Maximum Tip Size | 0.027 |
| | Maximum psi (bar) | 3300 (227) |
| | Maximum gpm (lpm) | 0.75 (2.8) |
| (0 | Honda Engine cc (hp) | 120 (4.0) |
| TION | Control | SmartControl 3.0 |
| IFICA | Weight Ib (kg) | 89 (41) |
| SPECIFICATIONS | Gun Support: 1 Gun 2 Guns 3 Guns 4 Guns | 0.027 |
| | Gun Support (Elec.): 1 Gun 2 Guns | N/A |

| GMAX II 3900 |
|--------------------|
| 0.036 |
| 3300 (227) |
| 1.25 (4.7) |
| 120 (4.0) |
| SmartControl 3.0 |
| 109 (50) |
| 0.036 0.023 |
| N/A |

| | G |
|-----|----------------|
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| | |
| N/A | 0.031 0.017 |









| SERIES TYPE | | TYPE | STANDARD | |
|---------------------|--------------------------------|----------|---|--|
| MODEL | Cart Design– Part Number | | 16W863 | |
| | Gun | | Contractor | |
| NCLUDES | Hose | | 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless | |
| | Тір | | RAC X 517 | |
| | Filter | | Easy Out | |
| | Туре | | Endurance Piston QuikChange System | |
| ES | PUMP | Intake | QuikAccess | |
| ATUR | | Rod | Chromex | |
| AL FE | | Sleeve | Hardened SST | |
| additional features | | | _ | |
| ADD | | DTHER | - | |
| | | Ē | - | |
| | | | - | |
| | Replacement Pump Repair Kit | | 246428 | |
| RTS | | | 244194 | |
| wear parts | Rod | | 249125 | |
| WE/ | Sleeve | 9 | - | |
| | Intake | Seat Kit | 246429 | |
| IUAL | Opera | tion | 332919 | |
| MAN | Parts | | 332921 | |

| 1/4 in x 50 ft (6.4 mm x 15 m)1/4 in x 50 ft (6.4 mm x 15 m)1/4 in x 50 ft BlueMax II Airless1/4 in x 50 ft (6.4 mm x 15 m)BlueMax II Airless1/4 in x 50 ft (6.4 mm x 15 m)1/4 in x 50 ft (6.4 mm x 15 m)1/4 in x 50 ft (6.4 mm x 15 m)BlueMax II Airless1/4 in x 50 ft (6.4 mm x 15 m)1/4 in x 50 ft (6.4 mm x 15 m)1/4 in x 50 ft (6.4 mm x 15 m)RAC X 517RAC X 517RAC X 517RAC X 517Easy OutEasy OutEasy OutEasy OutEndurance Piston ProConnect 2Endurance Piston QuikAccessEndurance Piston ProConnect 2Endurance Piston ProConnect 2QuikAccessQuikAccessQuikAccessQuikAccessChromexChromexChromexChromexHardened SSTHardened SSTHardened SST | | | | |
|--|-----------------|-----------------|--|---|
| ContractorContractorContractor1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II AirlessRAC X 517RAC X 517RAC X 517RAC X 517Easy OutEasy OutEasy OutEasy OutEndurance Piston ProConnect 2Endurance Piston QuikChange SystemEndurance Piston ProConnect 2Endurance Piston OuikAccessQuikAccessQuikAccessQuikAccessQuikAccessChromexChromexChromexChromexHardened SSTHardened SSTHardened SSTQuikReelLo-Boy FrameOn-Board ToolboxOn-Board Toolbox-16X41416Y59816X43416X43416X434248209248209248210239922239922239922244119332919332919332919332919 | LO-BOY | STANDARD | PROCONTRACTOR | LO-BOY |
| 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless RAC X 517 Easy Out Easy Out Easy Out Easy Out Easy Out Easy Out Endurance Piston ProConnect 2 Endurance Piston QuikAccess Hardened SST Hardened SST Hardened SST Lo-Boy Frame - QuikReel Lo-Boy Fram - QuikAt14 16X598 16X414 16X414 16X414 16Y598 16X414 16X413 16X435 248209 248209 248209 248209 248209 248209 248210 2332919 332919 332919 332919 332919 332919 332919 | 16W866 | 16W865 | 16W867 | 16W870 |
| 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless RAC X 517 RAC X 517 RAC X 517 RAC X 517 Easy Out Easy Out Easy Out Easy Out Easy Out Easy Out Easy Out Easy Out Endurance Piston ProConnect 2 Endurance Piston QuikAccess Endurance Piston ProConnect 2 QuikAccess QuikAccess QuikAccess QuikAccess QuikAccess Chromex Chromex Chromex Chromex Hardened SST Hardened SST Hardened SST Hardened SST - - On-Board Toolbox - - - 248212 248212 248210 248210 248209 248209 248209 248210 248210 239922 239922 239922 239921 332919 332919 | Contractor | Contractor | Contractor | Contractor |
| Easy OutEasy OutEasy OutEasy OutEndurance Piston ProConnect 2Endurance Piston QuikChange SystemEndurance Piston ProConnect 2Endurance Piston ProConnect 2QuikAccessQuikAccessQuikAccessQuikAccessChromexChromexChromexChromexHardened SSTHardened SSTHardened SSTHardened SSTLo-Boy Frame–QuikReelLo-Boy Fram––WatchDog–––On-Board Toolbox–16X41416Y59816X41416X43524820924820924820924821023992223992223992224919332919332919332919332919 | (6.4 mm x 15 m) | (6.4 mm x 15 m) | BlueMax II Airless <i>AND</i> 1/4 in x 50 ft (6.4 mm x 15 m) | 1/4 in x 50 f (6.4 mm x 15 BlueMax II Airle |
| Endurance Piston ProConnect 2Endurance Piston QuikAccessEndurance Piston ProConnect 2Endurance Piston ProConnect 2QuikAccessQuikAccessQuikAccessQuikAccessChromexChromexChromexChromexHardened SSTHardened SSTHardened SSTHardened SSTLo-Boy Frame–QuikReelLo-Boy Fram––UED Display–––0n-Board Toolbox–16X41416Y59816X41416X41924821224821224821224821316X43424820616X43416X435248209248209248209248210239922239922239922244199332919332919332919332919 | RAC X 517 | RAC X 517 | RAC X 517 | RAC X 517 |
| ProConnect 2QuikChange SystemProConnect 2ProConnect 1QuikAccessQuikAccessQuikAccessQuikAccessChromexChromexChromexChromexHardened SSTHardened SSTHardened SSTHardened SSTLo-Boy Frame–QuikReelLo-Boy Fram––LED Display–––WatchDog–16X41416Y59816X41416X41924821224821224821224821316X43424820616X43416X435248209248209248209248210239922239922239922244199332919332919332919332919 | Easy Out | Easy Out | Easy Out | Easy Out |
| Chromex Chromex Chromex Chromex Hardened SST Hardened SST Hardened SST Hardened SST Lo-Boy Frame – QuikReel Lo-Boy Fram – – LED Display – – – WatchDog – – – On-Board Toolbox – 16X414 16Y598 16X414 16X419 248212 248212 248212 248213 16X434 248206 16X434 16X435 248209 248209 248209 248210 239922 239922 239922 24992 332919 332919 332919 332919 | | | | Endurance Pis ProConnect |
| Hardened SST Lo-Boy Frame Lo-Boy Frame< | QuikAccess | QuikAccess | QuikAccess | QuikAccess |
| Lo-Boy Frame - QuikReel Lo-Boy Frame - - LED Display - - - WatchDog - - - On-Board Toolbox - 16X414 16Y598 16X414 16X419 248212 248212 248212 248213 16X434 248206 16X434 16X435 248209 248209 248209 248210 239922 239922 239922 239921 332919 332919 332919 332919 | Chromex | Chromex | Chromex | Chromex |
| - - LED Display - - - WatchDog - - - On-Board Toolbox - 16X414 16Y598 16X414 16X419 248212 248212 248212 248213 16X434 248206 16X434 16X435 248209 248209 248209 248210 239922 239922 239922 244199 332919 332919 332919 332919 | Hardened SST | Hardened SST | Hardened SST | Hardened SS |
| - - WatchDog - - - On-Board Toolbox - 16X414 16Y598 16X414 16X419 248212 248212 248212 248213 16X434 248206 16X434 16X435 248209 248209 248209 248210 239922 239922 239922 244199 332919 332919 332919 332919 | Lo-Boy Frame | _ | QuikReel | Lo-Boy Fram |
| - - On-Board Toolbox - 16X414 16Y598 16X414 16X419 248212 248212 248212 248213 16X434 248206 16X434 16X435 248209 248209 248209 248210 239922 239922 239922 2499 332919 332919 332919 332919 | - | _ | LED Display | - |
| 16X414 16Y598 16X414 16X419 248212 248212 248212 248213 16X434 248206 16X434 16X435 248209 248209 248209 248210 239922 239922 239922 244199 332919 332919 332919 332919 | - | - | WatchDog | - |
| 248212 248212 248212 248213 16X434 248206 16X434 16X435 248209 248209 248209 248210 239922 239922 239922 2499 332919 332919 332919 332919 | - | - | On-Board Toolbox | - |
| 16X434 248206 16X434 16X435 248209 248209 248209 248210 239922 239922 239922 244199 332919 332919 332919 332919 | 16X414 | 16Y598 | 16X414 | 16X419 |
| 248209 248209 248209 248209 248210 239922 239922 239922 24992 244199 332919 332919 332919 332919 332919 | 248212 | 248212 | 248212 | 248213 |
| 239922 239922 239922 244199 332919 332919 332919 332919 | 16X434 | 248206 | 16X434 | 16X435 |
| 332919 332919 332919 | 248209 | 248209 | 248209 | 248210 |
| | 239922 | 239922 | 239922 | 244199 |
| 332921 332921 332921 332921 | 332919 | 332919 | 332919 | 332919 |
| | 332921 | 332921 | 332921 | 332921 |

| LO-BOY | CONVERTIBLE | | | |
|---|---|--|--|--|
| 16W870 | Hi-Boy–16W873 | | | |
| Contractor | Contractor | | | |
| 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless | 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless | | | |
| RAC X 517 | RAC X 517 | | | |
| Easy Out | Easy Out | | | |
| Endurance Piston ProConnect 2 | Endurance Piston QuikChange System | | | |
| QuikAccess | QuikAccess | | | |
| Chromex | Chromex | | | |
| Hardened SST | Hardened SST | | | |
| Lo-Boy Frame | - | | | |
| - | - | | | |
| - | - | | | |
| _ | - | | | |
| 16X419 | 16Y706 | | | |
| 248213 | 248213 | | | |
| 16X435 | 248207 | | | |
| 248210 | 248210 | | | |
| 244199 | 244199 | | | |
| 332919 | 332919 | | | |
| | | | | |

| MAX II 590(| D | |
|-------------------------|-----|-----|
| 0.043 | | |
| 3300 (227) | | |
| 200 (6.5) | | |
| 160 (5.5) | | |
| SmartControl 3.0 | | |
| 139 (64) | | |
| 0.043 0.029 0.023 | | |
| N/A | N/A | N/A |

| GMAX II 7900 |
|----------------------------------|
| 0.048 |
| 3300 (227) |
| 2.20 (8.3) |
| 200 (6.5) |
| SmartControl 3.0 |
| 146 (67) |
| 0.048 0.035 0.027 0.023 |
| N/A |



| STANDARD | PROCONTRACTOR | IRONMAN |
|---|----------------------------------|--|
| 16W869 | 16W871 | 16W881 |
| Contractor | Contractor | Silver Plus |
| 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless | BlueMax II Airless AND | 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Airless <i>AND</i> 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless |
| RAC X 517 | RAC X 517 | RAC X 517, RAC X Wide RAC 1231 |
| Easy Out | Easy Out | Easy Out |
| Endurance Piston QuikChange System | Endurance Piston ProConnect 2 | Endurance Piston ProConnect 2 |
| QuikAccess | QuikAccess | QuikAccess |
| Chromex | Chromex | MaxLife |
| Hardened SST | Hardened SST | MaxLife |
| - | QuikReel | Roll Cage Frame |
| _ | LED Display | LED Display |
| - | WatchDog | WatchDog |
| - | On-Board Toolbox | Flat-Proof Tires |
| 16Y706 | 16X419 | 16X420 |
| 248213 | 248213 | 248213/16X430* |
| 248207 | 16X435 | 16X436 |
| 248210 | 248210 | 257031 |
| 244199 | 244199 | 244199 |
| 332919 | 332919 | 332919 |
| 332921 | 332921 | 332921 |



| LO-BOY | STANDARD | PROCONTRACTOR | IRONMAN |
|---|---------------------------------------|--|-----------------------------------|
| 16W884 | 16W883 Roof Rig 16W987 | 16W885 | 16W887 |
| Contractor | Contractor | Contractor | Silver Plus |
| 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Airless <i>AND</i> 1/4 in x 3 ft (6.4 mm x 0.9 m) BlueMax II Whip | BlueMax II Airless AND | 3/8 in x 50 ft (9.5 mm x 15 m) BlueMax II Airless <i>AND</i> 1/4 in x 50 ft (6.4 mm x 15 m) BlueMax II Airless | BlueMax II Airless AND |
| RAC X 517 | RAC X 517 | RAC X 517 | RAC X 517, RAC X Wide RAC 1231 |
| Easy Out | Easy Out | Easy Out | Easy Out |
| Endurance Piston QuikChange System | Endurance Piston QuikChange System | Endurance Piston ProConnect 2 | Endurance Piston ProConnect 2 |
| QuikAccess | QuikAccess | QuikAccess | QuikAccess |
| MaxLife | MaxLife | MaxLife | MaxLife |
| MaxLife | MaxLife | MaxLife | MaxLife |
| Lo-Boy Frame | - | QuikReel | Roll Cage Frame |
| - | - | LED Display | LED Display |
| - | - | WatchDog | WatchDog |
| - | - | On-Board Toolbox | Flat-Proof Tires |
| 16X426 | 16X423 | 16X426 | 16X426 |
| 249123 | 249123 | 249123 | 249123/17A578* |
| 16X439 | 249119 | 16X439 | 16X439 |
| 249121 | 249121 | 249121 | 249121 |
| 240918 | 240918 | 240918 | 240918/16X467* |
| 332919 | 332919 | 332919 | 332919 |
| 332921 | 332921 | 332921 | 332921 |

*Includes Ceramic Balls.

WARRANTY SPRAY PROTECTION

We stand behind every piece of equipment we manufacture with the industry's strongest warranty. Spray with the confidence that you will probably never need to use Graco's warranty, but if you do. . . *we will be there.*

3-YEAR WARRANTY Coverage against defects in materials and workmanship on the entire sprayer.

NOBODY ELSE BUILDS SPRAYERS LIKE THIS.





ABOUT GRACO

🛭 | PROVEN QUALITY. LEADING TECHNOLOGY.

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441 Minneapolis, MN 55440-1441 Tel: 612-623-6000 Fax: 612-623-6777

AMERICAS

MINNESOTA Worldwide Headquarters Graco Inc. 88-11th Avenue N.E. Minneapolis, MN 55413

EUROPE

BELGIUM European Headquarters Graco N.V. Industrieterrein-Oude Bunders Slakweidestraat 31 3630 Maasmechelen, Belgium Tel: 32 89 770 700 Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd. Suite 17, 2 Enterprise Drive Bundoora, Victoria 3083 Australia Tel: 61 3 9468 8500 Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd. Shanghai Representative Office Building 7 1029 Zhongshan Road South Huangpu District Shanghai 200011 The People's Republic of China Tel: 86 21 649 50088 Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd. India Liaison Office Room 443, Augusta Point Regus Business Centre 53 Golf Course Road Gurgaon, Haryana India 122001 Tel: 91 124 435 4208 Fax: 91 124 435 4001

JAPAN

Graco K.K. 1-27-12 Hayabuchi Tsuzuki-ku Yokohama City, Japan 2240025 Tel: 81 45 593 7300 Fax: 81 45 593 7301

KOREA

Graco Korea Inc. Shinhan Bank Building 4th Floor #1599 Gwanyang-Dong, Dongan-Ku, Anyang-si, Korea 431-060 Tel: 82 31 476 9400 Fax: 82 31 476 9801

SALES/ DISTRIBUTION/ SERVICE Call today for product information or to request a demonstration. 800-690-2894 or visit us at www.graco.com. Graco Inc. is registered to I.S. EN ISO 9001

North America Customer Service 800-690-2894 Fax 800-334-6955

> ©2014 Graco Inc. 343729 Rev. A 8/14 All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice. All other brand names or marks are used for identification purposes and are trademarks of their respective owners. Blue is a trademark of Graco Inc. for Contractor Equipment Sprayers.