

# 17D473 Husky™ 205 Flush Kit

3A5378A

Low Pressure Flush Kit for for M2K Spray Packages


EN



### Important Safety Instructions

Read all warnings and instructions in manuals 333309 and 308652. Save those instructions.

Ref. No.	Part No.	Description	Qty.	Ref. No.	Part No.	Description	Qty.
1	---	NUT, lock; M5 x 0.8	4	5	17D555	BRACKET, mounting; M2K	1
2	110873	SCREW; M5 x 20mm	4	6	238959	HOSE, coupled; 3/16 in. x 4.5 ft.	1
3	117017	WASHER	8	7	D11021	PUMP, flush; Husky 205	1
4	166421	FITTING, pipe	3	8	17D276	TUBE; siphon	1

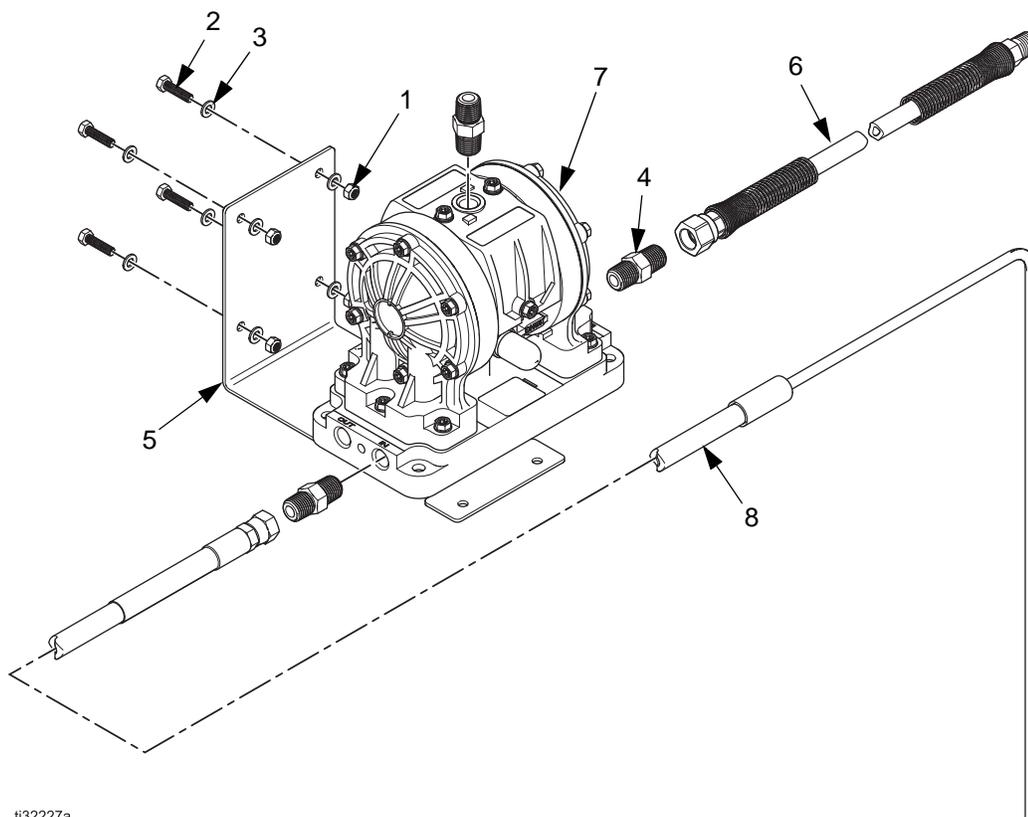

ti32227a

## Installation Instructions

1. Install mounting bracket (5) to the M2K cart or to a customer-supplied wall bracket using four screws (2), eight washers (3), and four lock nuts (1).
2. Install pump (7) on mounting bracket (5) using screws provided with pump.
3. Install three fittings (4):
  - a. Install one fitting in the air inlet port on top of the pump.
  - b. Install remaining two fittings into one fluid inlet and one fluid outlet on the pump.


**NOTE:** Fluid inlet and outlet fittings (4) can be installed on the same end, or opposite ends of the pump. Plug ports that are not used (plugs provided).

4. Remove plug from solvent inlet port on fluid manifold of M2K unit and install male end of hose (6). (See manual 333309.)
5. Connect female end of hose (6) to fitting (4) connected to the fluid outlet of pump (7).

**NOTE:** Connections in steps 4 and 5 may vary, depending on configuration of fluid manifold.

6. Install air line (100 psi max WPR) to the pump air inlet (4). (Air line not provided.)
7. Connect siphon tube (8) to the pump fluid inlet fitting (4).

### Mount Flush Kit to M2K Cart or Wall Bracket

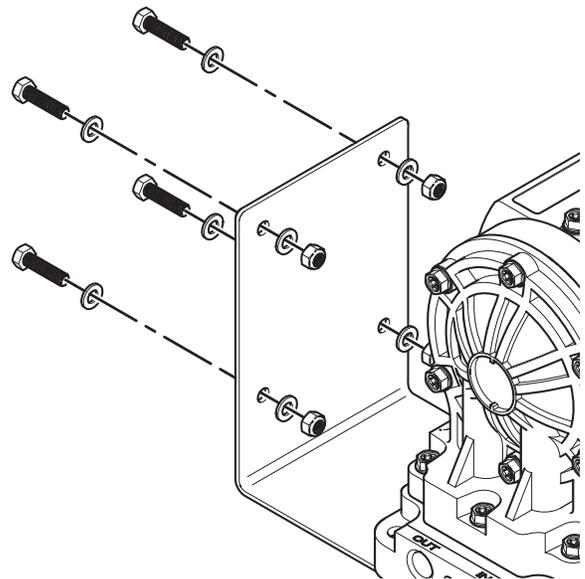

## Graco Information

For the latest information about Graco products, visit [www.graco.com](http://www.graco.com).

For patent information, see [www.graco.com/patents](http://www.graco.com/patents).

**TO PLACE AN ORDER**, contact your Graco distributor or call to identify the nearest distributor.

**Phone:** 612-623-6921 **or Toll Free:** 1-800-328-0211 **Fax:** 612-378-3505

*All written and visual data contained in this document reflects the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.*

Original instructions. This manual contains English. MM 3A5378

**Graco Headquarters:** Minneapolis

**International Offices:** Belgium, China, Japan, Korea

**GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA**

**Copyright 2017, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.**

[www.graco.com](http://www.graco.com)

Revision A, October 2017