

# CSP EZ Greaser

**SINGLE AXLE WITH INNER AND OUTER S-CAMS AND CLEVIS PINS 6-8 POINT #25T391**

**3A8038B**

EN

*For use as a centralized lubrication system on heavy trucks. For professional use only.*



### Important Safety Instructions


Read all warnings and instructions in this manual and in the pump manual before using the equipment. Save all instructions.

## WARNING



### PERSONAL PROTECTIVE EQUIPMENT

Wear appropriate protective equipment when in the work area to help prevent serious injury, including eye injury, hearing loss, inhalation of toxic fumes, and burns.

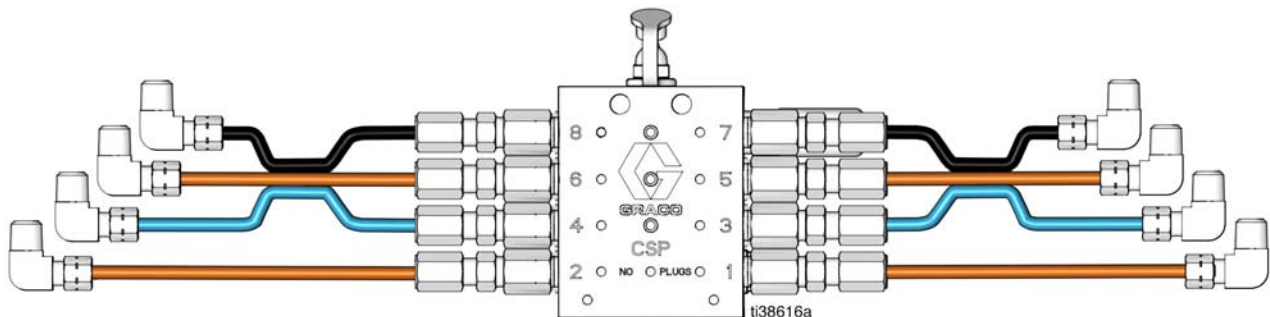

## Typical Layout

Outlet No.	Description	Tube Color	Bundle & Marking	Endpoint Fitting
1	Clevis Pin	Orange	Single Tube (P/N 563789)	Elbow (P/N 556638)
3	S-Cam	Blue	3-Tube Bundle (P/N 563783)	Elbow (P/N 556638)
5	Slack Adjuster	Orange		Elbow (P/N 556638)
7	S-Cam	Black		Elbow (P/N 556638)

Outlet No.	Description	Tube Color	Bundle & Marking	Endpoint Fitting
2	Clevis Pin	Orange	Single Tube (P/N 563789)	Elbow (P/N 556638)
4	S-Cam	Blue	3-Tube Bundle (P/N 563783)	Elbow (P/N 556638)
6	Slack Adjuster	Orange		Elbow (P/N 556638)
8	S-Cam	Black		Elbow (P/N 556638)

For drum brakes with enclosed S-cams, the tubes and fittings attached to outlets 7 and 8 may be removed and replaced with doubling plugs. This causes the grease from those outlets to combine with the outlets below them and feed into the slack adjusters instead.

## Outlet Fitting Removal

Use a 7/16 in. wrench (or an adjustable wrench) to remove the tubing nut from where the tube is attached to the fitting(s) and detach the tube. Use a 1/2 in. (13 mm) wrench to remove the outlet fitting from the CSP valve, making sure that the clamping ring (cone-shaped metal gasket) is removed with the fitting.

## Doubling Plug Installation

### NOTICE

Never install a doubling plug into outlet 1 or outlet 2. Plugging one or both of these outlets will cause the valve to stall, and it will not function again until the plugs are removed from these outlets.

Use a 3/16 in (5 mm) hex key or Allen wrench to install the doubling plug by tightening the plug until snug, then torque the plug to 10- 12 ft-lb (14 - 16 N•m).

## California Proposition 65

### CALIFORNIA RESIDENTS

 **WARNING:** Cancer and reproductive harm – [www.P65warnings.ca.gov](http://www.P65warnings.ca.gov).

## Graco Information

For the latest information about Graco products, visit [www.graco.com](http://www.graco.com).

For patent information, see [www.graco.com/patents](http://www.graco.com/patents).

**TO PLACE AN ORDER**, contact your Graco distributor or call to identify the nearest distributor.

**Phone:** 612-623-6928 or **Toll Free:** 1-800-533-9655, **Fax:** 612-378-3590

*All written and visual data contained in this document reflects the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.*

Original instructions. This manual contains English. MM 3A8038

**Graco Headquarters:** Minneapolis

**International Offices:** Belgium, China, Japan, Korea

**GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA**  
**Copyright 2020, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.**

[www.graco.com](http://www.graco.com)  
Revision B, November 2020