

# **CSP EZ Greaser**

3A8040B

### **LANDING GEAR KIT #25T393**

ΞN

For use as a centralized lubrication system on heavy trucks. For professional use only.



### **Important Safety Instructions**


Read all warnings and instructions in this manual and in the pump manual before using the equipment. Save all instructions.

# **MARNING**



#### PERSONAL PROTECTIVE EQUIPMENT

Wear appropriate protective equipment when in the work area to help prevent serious injury, including eye injury, hearing loss, inhalation of toxic fumes, and burns.

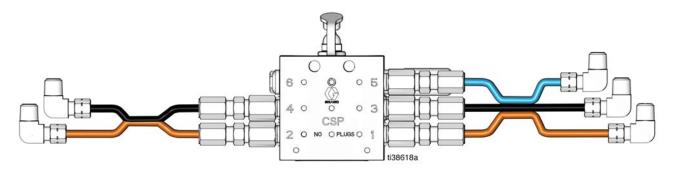

## **Typical Layout**

Outlet No.	Description	Tube Color	Bundle & Marking	Endpoint Fitting
1	Gear Nut	Orange	3-Tube Bundle (P/N 563783)	Elbow (P/N 556638)
3	Gear Bearing	Black		Elbow (P/N 556638)
5	Bevel	Blue		Elbow (P/N 556638)

Outlet No.	Description	Tube Color	Bundle & Marking	Endpoint Fitting
2	Gear Nut	Orange	2-Tube Bundle	Elbow (P/N 556638)
4	Gear Bearing	Black	(P/N 563788)	Elbow (P/N 556638)
6	PLUG	N/A		

If some outlets are unneeded, the tubiesand fittings attached to outlets 3, 4, and /or 5 may be removed and replaced with doubling plugs. This causes the grease from those outlets to combine with the outlets below them.

## **Outlet Fitting Removal**

Use a 7/16 in. wrench (or an adjustable wrench) to remove the tubing nut from where the tube is attached to the fitting(s) and detach the tube. Use a 1/2 in. (13 mm) wrench to remove the outlet fitting from the CSP valve, making sure that the clamping ring (cone-shaped metal gasket) is removed with the fitting.

## **Doubling Plug Installation**

#### NOTICE

Never install a doubling plug into outlet 1 or outlet 2. Plugging one or both of these outlets will cause the valve to stall, and it will not function again until the plugs are removed from these outlets.

Use a 3/16 in (5 mm) hex key or Allen wrench to install the doubling plug by tightening the plug until snug, then torque the plug to 10- 12 ft-lb (14 - 16 N•m).

## **California Proposition 65**

#### **CALIFORNIA RESIDENTS**

MARNING: Cancer and reproductive harm – www.P65warnings.ca.gov.

## **Graco Information**

For the latest information about Graco products, visit www.graco.com.

For patent information, see www.graco.com/patents.

TO PLACE AN ORDER, contact your Graco distributor or call to identify the nearest distributor.

Phone: 612-623-6928 or Toll Free: 1-800-533-9655, Fax: 612-378-3590

All written and visual data contained in this document reflects the latest product information available at the time of publication.

Graco reserves the right to make changes at any time without notice.

Original instructions. This manual contains English. MM 3A8040

Graco Headquarters: Minneapolis International Offices: Belgium, China, Japan, Korea

GRACO INC. AND SUBSIDIARIES • P.O. BOX 1441 • MINNEAPOLIS MN 55440-1441 • USA Copyright 2020, Graco Inc. All Graco manufacturing locations are registered to ISO 9001.